



AMT

Agricultural Mfg. & Textiles, Inc.

Product Catalog 2023 | Volume 1



Agricultural Mfg. & Textiles, Inc.
1451 Stagecoach Road, Laurens, SC 29360 USA

Call Toll Free: (800) 344-2358 (USA, Canada & Mexico)

International Phone: (864) 682-3445

Email: sales@amt-usa.com

www.amt-usa.com



Our Story

Founded in 1975 by Charles, “Chicken Little” Little. Agricultural Mfg. & Textiles, Inc. began to redefine the poultry industry by concentrating on 3 basic core values:

Providing the poultry industry with the absolute best quality products

Maintaining honest and competitive pricing for our customers

Being a proven & trusted partner to our clients with quick, efficient service

For more than 4 decades, AMT has continued to innovate within the poultry industry. We provide Best In Class products with the largest in-stock selection, experienced installation and technical advice, and an unwavering commitment to customer satisfaction driven by our heritage.

Egg Belt, Curtain Material, Cord, Rope and Curtain Strapping continue to be the foundation of our business. We combine those with a complete line of winching materials and other Accessories for poultry, swine and dairy buildings, as well as a constant sourcing for items from around the world to stock our shelves with the best quality products at competitive prices. With over 100,000 sq. ft. of warehouse space, we possess the largest in stock selection of winches & egg belts in North America.

Get to know AMT and discover the AMT Advantage.



Largest in-Stock
selection in
North America

TABLE OF CONTENTS



| | | | |
|-----------------------------------|-------|-------------------------------------|----|
| Our Story | 3 | Washers & Bolts | 40 |
| New Products | 6 | Screws, Screw Hooks, & Bolts | 41 |
| Winching | 10 | Supplemental Feeding | 42 |
| Ceiling Winches | 10 | Feeder Hangers & Pipe Clamps | 43 |
| Electric Winches | 12 | Migration Fence | 44 |
| Hand Winches | 14 | Tools | 45 |
| Winching Systems | 16 | Personal Protective Equipment | 46 |
| Winching Accessories..... | 20 | Poultry Feed & | |
| Cable | 21 | Handling Equipment | 47 |
| Suspension Rod & Wire | 22 | Egg Belt | 48 |
| Cord, Rope & Cable Fittings | 23 | XF966 Belt..... | 48 |
| Motors & Power Transmission | 26 | Featherglide Belt | 49 |
| Motors | 26 | Perforated Belt | 49 |
| Pulley Sheaves | 26 | Econoglide Belt | 50 |
| Power Cords | 27 | Fire Retardant Belt | 50 |
| V-Belts | 27-28 | Mylar Belt | 51 |
| Chain & Sprockets | 29 | Egg Finger Belt | 51 |
| Pulleys | 30 | Splicing Supplies | 52 |
| Hose & Fittings | 32 | Manure Belt & Curtain | 53 |
| Water Filters | 36 | Curtain Diagram | 54 |
| Water Filter Housings | 36 | Curtain Material | 55 |
| Water Filters | 37 | Curtain Accessories | 59 |
| Hardware | 38 | AMT Winching Guidelines | 62 |
| Eye Bolts | 38 | Warranty Information | 63 |
| S-Hooks & Hex Nuts | 39 | | |



NEW PRODUCTS



AMT Prime Auger Motors

| Item # | Description |
|--------|--------------------|
| 30050 | 1/2 HP Auger Motor |
| 30075 | 3/4 HP Auger Motor |
| 30100 | 1 HP Auger Motor |
| 30150 | 1.5 HP Auger Motor |

AMT Prime Fan Motors

| Item # | Description |
|--------|------------------|
| 32050 | 1/2 HP Fan Motor |
| 32100 | 1 HP Fan Motor |
| 32150 | 1.5 HP Fan Motor |

AMT Prime Farm Duty Motors

| Item # | Description |
|--------|------------------------|
| 34050 | 1/2 HP Farm Duty Motor |
| 34075 | 3/4 HP Farm Duty Motor |
| 34100 | 1 HP Farm Duty Motor |



#48011

Flange Bearing



#48020

Automatic Belt Tensioner



#28024

#28023

Power Cords

AMT Prime V-Belts

Classical and cogged styles ranging from size A21 to A91





PERSONAL PROTECTIVE EQUIPMENT



#70011-50PK & #70013-50PK

Disposable Coverall



#70005-20PK

N95 Face Mask with Respirator



#70001

Boot Covers *Fits up to size 12*

HANGERS AND CLAMPS

| Item # | Description |
|--------|-----------------------------------|
| 19501 | Turkey Feeder Pipe Clamp |
| 19502 | Feed Tube Clamp - 1.75" |
| 19504 | Feed Tube Clamp - 3.25" |
| 19505 | Feed Tube Clamp - 3.5" |
| 19506 | Feed Tube Clamp - 4" |
| 19521 | Wire Form Pipe Hanger for Turkeys |
| 19570 | Fill Pipe to Flex Pipe Coupler |

TOOLS



#23006

Cable Cutter



#20501 #20502 #20503

Torx 2" Impact Screw Bit:
T25, T30, T40

HOSE AND FITTINGS



#26015

Metal Pipe Strap with
2 holes - 3"



#26004

Stainless Steel Hose
Clamp - 2 9/16" - 3 1/2"



#26005

Stainless Steel Hose
Clamp - 3" - 4"



#26006

Stainless Steel Hose
Clamp - 3.5" - 5.5"



NEW PRODUCTS

PRO-TECH CONTROLLERS AND SENSORS



#13105

Voltage Minder



#13100


Curtain Minder



#13108

Temp Minder

EGG BELT & MANURE BELT ACCESSORIES



#60999-1200mm

Manure Drying System



Available in 840',
1040', & 1240' rolls

#62038-0840
-1040
-1240

XF966 3 3/4" Heavy
Tan Egg Belt



#66913

Clipper Unibar Stainless
Belt Lacing - 12"



#66401

Plastic Hold Down Clip

WINCHING



#24021

WindLift
energy saver

WindLift 2000
Electric Ceiling Winch

Don't Forget
Grease!

#24211



#17002

Double Back Plate



WATER FILTERS



#66401

2.5"X10" Activated Carbon
Water Filter Cartridge

HARDWARE



#15020

Ceiling Hook

CURTAIN REPAIR



#10001

Vinyl Curtain Repair Glue

PULLEYS



#18258

2 1/2" Red Nylon
Composite with Shields



#18255-SS

2 1/2" White with Stainless Steel
Straps and Hardware



#18455

4 1/2" Cast Bearing Pulley
with Shields

CHAIN



#19602

#2 Galvanized Steel
Double Loop X 100' Chain



#17018

3/16" Carabiner Clips



#19602-SS

#2 Stainless Steel Double
Loop X 100' Chain

FOGGER NOZZLES



| Item # | Description |
|--------|---------------|
| 26101 | 1 GPH 100 PSI |
| 26102 | 2 GPH 100 PSI |
| 26103 | 3 GPH 100 PSI |

SUPPLEMENTAL FEEDING



#35725

Short Swing Mate



#35726

Long Swing Mate



WINCHING

WINCHING



#24050

Winches That Earned Their Reputation

Oven-cured black epoxy coating preferred by the poultry, swine and dairy industries | Shafts and gear made of high tensile alloy steel | All gears are heat-treated to provide longer life



#24050

#24049

WINDLIFT 5000LB OVERHEAD WINCH

The finest Winches we have seen in over 35 years of business

- 1.75 in hub diameter
- 1/4 in maximum cable size
- Holds 60ft of 3/16 in or 45 ft of 1/4 in cable
- 5000 lb capacity
- 90:1 Ratio - No double-back required
- Completely Sealed - Maintenance Free
- Divided Reel
- Add **Strap Kit #24054** or **New AMT Winch Slings** on pg 11 for cable-free winching system
- Available in Orange

WindLift 5000 winches are designed to pull in both directions simultaneously. They are not recommended or warranted for single pull applications

AMT WINDLIFT PRIME DRINKER WINCH 2000LB WORM GEAR WITH DIVIDED REEL

The perfect companion to our WindLift 5000 Winch

- 2000 lb rated capacity
- 900 lb working load capacity
- Used to winch drinkers
- Add **New AMT Winch Slings** on pg 11 for cable-free drinker winching system



#24044



#240461

WINDLIFT 4600 HEAVY DUTY WORM GEAR WINCH

- Trouble-free worm gear design
- 4600 lb capacity
- Self-braking
- 65:1 gear ratio
- Divided reel
- Packaged 1Box
- Add Drum/Strap Kit **#24089**, Strap kit **#240473** or **New AMT Winch Slings** for cable-free winching system.



#24027

2000 WORM GEAR WITH SINGLE REEL

- 2000 lb capacity
- Single reel
- Self-braking
- 41:1 gear ratio
- Loop drive



#240301

#240302


H3000 CEILING WINCH

Our clutch design eliminates the need for adjustment and has greatly improved the dependability of the H3000 winch.

- 3000 lb capacity
- Economical
- 45:1 gear ratio
- Allimite grease fitting

WINCH SLINGS

- Break strength of 6,000 lbs.
- A winch spooling attachment designed to replace strap kits and winch cable.
- No more worn or frayed cable rusting and breaking before its time. No more strap alignment problems or overfilling spools.
- Made from material that is impervious to rust. Ready made slings dramatically reduce installation time.
- Tight bends kink cable and cause weak points. Slings have excellent bend and flex fatigue resistance. As a Drum is filled, the winch capacity reduces. Slings allow maximum winch capacity.
- Breakthrough wear properties result in long life even in repetitive cycle applications. Take advantage of our slings high breaking strength perfect for nests and chain feeders.



| Item # | Description |
|--------|--|
| 251400 | 1/4' x 500 ft sling rope on spool |
| 251403 | 3' sling with thimbles - 1/4" orange |
| 251430 | 30' sling with thimbles - 1/4" orange |
| 251445 | 45' sling with thimbles - 1/4" orange |
| 251460 | 60' sling with thimbles - 1/4" orange |
| 251470 | 70' sling with thimbles - 1/4" orange |
| 253600 | 500' sling rope on spool - 3/16" blue |
| 253615 | 15' winch sling with one thimble - 3/16" blue |
| 253625 | 25' winch sling with thimble on both ends - 3/16" blue |
| 17002 | Double back plate |

| Item # | Description |
|--------|---|
| 240180 | 2000lb. single strap kit for 24025 winch |
| 24054 | Strap kit for WindLift 5000lb. winch |
| 24022 | Strap kit for WindLift 2000lb. electric winch |
| 240473 | Drum/Strap kit for 4600lb. & 4800lb. winches |
| 240489 | Strap kit for 4600lb & 4800lb winches |
| 24053 | Drum/Strap kit for 5000lb. winches |
| 240182 | Strap bolt for 24025 winch |
| 240474 | Strap bolt for WindLift 4600 & 4800 winches |
| 24056 | Strap bolt for 5000 lb. winches |
| 240184 | Strap bolt for 24044 WindLift winch |
| 24055 | Swivels for winch strap |

STRAP KITS

- Straps provide more strength than cable at the point of maximum stress
- A must for use with softer and more brittle stainless steel cable
- Straps provide for smoother operation of winching system



#24054



ELECTRIC WINCHES



NEW DESIGN

We have modified this winch for manual operation during power failure.

THIS ITEM IS ALSO AVAILABLE WITH A 75 FT CONTROL SWITCH ITEM #24051-75

NO ASSEMBLY REQUIRED!
INSTALL WINCH,
PLUG IN, PRES UP
OR DOWN

#24051

WINDLIFT 5000 ELECTRIC WINCH

The Best Selling Feeder Winch Goes Electric

Built with the heart of our reliable WindLift 5000 manual winch. Pre-wired with motor and controller for easy installation. Built withstand harsh conditions in poultry, turkey and swine buildings.

- Designed for feed lines
- Weight: 42 lbs
- 110 volt
- Amperage: 7 at full load
- Brake motor for sure and safe stop
- Add **Strap Kit #24054** or **New AMT Winch Slings** on pg 11 for cable-free winching system



DONT FORGET
STRAPS!

ITEM #24022

WINDLIFT 2000 ELECTRIC WINCH

- Designed for drinker lines
- New manual override option
- Weight: 42 lbs
- 110 volt
- Amperage: 7 at full load
- Brake motor for sure and safe stop
- If using straps, **item #24022** is required



#24021



#240512

MASTER CONTROL BOX FOR WINDLIFT 2000 & 5000 ELECTRIC WINCHES

Operate up to 6 AMT WL5000 & WL2000 Electric Winches from one location. This waterproof control box easily installs and has many safety features wired in to prevent power surges from damaging winches.

- Designed to be used with up to 6-24051 & 24021 AMT Electric Winch
- Controls up to 6 winches at once or individually
- Momentary On/Off Switch
- Designed for 110 volt wiring
- Waterproof Metal Electric Box



WINCH CONTROL PACKAGES

You can now operate up to 4 WindLift 5000 Electric Winches with one electric control. Remote control comes preset, plug and go.

| Item # | Description |
|--------|--|
| 24103 | 3 Winch Remote Control Package Includes 3 Winches (WL5000E), 3 Control Boxes, & 1 Remote Control |
| 24104 | 4 Winch Remote Control Package Includes 4 Winches (WL5000E), 4 Control Boxes, & 1 Remote Control |



WINDLIFT 4800 ELECTRIC WINCH

- Trouble-free worm gear design
- 65:1 gear ratio
- Divided reel
- Includes pulley & belt
- Packaged 1/Box
- Add **Strap Kit #240489** or **New AMT Winch Slings** on pg 11 for cable-free winching system

Note: Requires 1/2,3/4 or 1 HP Farm Duty Motor. Not Included .

| Item # | Description |
|------------|--|
| 240481 | WindLift 4800 Motor Ready Winch |
| 240483-3/4 | WindLift 4800 with Pulleys, Belt, 3/4 HP Motor |
| 240483-1/0 | WindLift 4800 with Pulleys, Belt, 1 HP Motor |
| 240483-1/5 | WindLift 4800 w/ Pulleys, Belt, 1.5 HP Motor |
| 240473 | Drum/Strap Kit |
| 240489 | Strap Kit |
| 2404812 | Master Control Box for 4 |



#2404812

Master Control Box for WindLift 4800LB Electric Winches

- Controls up to 4 WindLift 4800 lb Electric Winches



HAND WINCHES



#24007

WINDLIFT 600LB HAND WINCH

- 600 lb capacity
- 3.1:1 ratio
- 1 in Diameter Hub
- Cable keeper included
- One-way ratchet free spools in off position
- 8 1/2 in ez-grip handle requires less effort to turn under load
- Packaged 10/Box



#24011

WINDLIFT 1200LB LARGE HUB HAND WINCH

- 1200 lb capacity
- 4.1:1 ratio
- 2 in Diameter Hub
- Cable keeper included
- One-way ratchet free spools in off position
- 9 1/2 in ez-grip handle requires less effort to turn under load.
- Packaged 10/Box



#24008

WINDLIFT 1200LB REVERSIBLE HANDLE

- Same as our **#24011** winch, but handle can be mounted on either side for easier installation



#24016

WINDLIFT 1400 HAND WINCH

- All the great features of our **#24011** winch, but with 1400 lb capacity



#17000

WINCH BRACKET

- For mounting winch at right angle to building
- Same Posi-Glaze coating as our hand winches
- 10/box

WINDLIFT AUTO BRAKE WINCHES




#24118

WINDLIFT 1800LB HAND WINCH

- Auto brake locks the load securely when the handle is released
- Double brake pawl for safety
- Comfort grip handle
- 5:1 gear ratio
- 2 in hub diameter
- Covered brake mechanism to protect against oil, dirt and elements

| Item # | Descriptions | Standard Package |
|--------|-------------------------------|------------------|
| 24112 | WindLift 1200 with Auto Brake | 6 |
| 24118 | WindLift 1800 with Auto Brake | 2 |
| 24126 | WindLift 2600 with Auto Brake | 2 |



DUTTON-LAINSON WINCHES

Hand and brake winches that have TUFFPLATE® zinc finish | 5 year limited warranty | Heat treated gears extended winch life | Reel gears are welded, not riveted | Winch reels are welded on both the inside and outside of side plate for stronger joints | Permanently lubricated bearings | Copper-brazed drive shaft gears | Ergonomic handle grips | Rating is based on THIRD layer of line



SELF-LOCKING BRAKE WINCHES

- Load stays locked in place when handle is released
- For vertical lifting applications
- Handle is integral part of breaking mechanism
- A minimal load is required to pull line from the winch drum

| Item # | Description |
|---------|-------------|
| 24342 | 1200 5.4:1 |
| 24343 | 1500 5.4:1 |
| 24345 | 2500 17.3:1 |
| A 24346 | 3500 18.7:1 |



MEDIUM DUTY

- Heat treated gears
- Embossed, reinforced bases

| Item # | Description |
|---------|----------------------|
| 24313 | 1300 4.4:1 |
| 24314 | 1300 4.4:1 Large Hub |
| B 24316 | 1600 5.4:1 |
| 24318 | 1800 5.4:1 |



HEAVY DUTY 2-SPEED

- Reversible ratchet
- Heat treated gears
- Quick-attach 9 1/2 in handle allows easy change from high speed to low gear, for heavier loads

| Item # | Description |
|---------|--------------------------------|
| 24325 | 2500 5.4:1 & 17.3:1 |
| C 24326 | 2500 5.4:1 & 17.3:1 Hand Brake |
| 24332 | 3200 5.4:1 & 17.3:1 Hand Brake |

STANDARD DUTY

- 1-way ratchet

| Item # | Description |
|--------|----------------------|
| 24306 | 600 3.2:1 |
| 24311 | 1100 3.7:1 |
| 24312 | 1100 3.7:1 Large Hub |

WORM GEAR WINCHES

- Loop Drive
- Quiet operation
- Load stays locked in place when handle is released

| Item # | Description |
|--------|-----------------------|
| 24320 | 2000 40:1 Split Reel |
| 24321 | 2000 40:1 Single Reel |

AMT HAND WINCHES



#24006

AMT 600LB. HAND WINCH



#24010

AMT 1200LB. HAND WINCH



#24013

AMT 1200LB. BRAKE WINCH



WINCHING SYSTEMS



FEED LINE WINCHING SYSTEM

WINCHES & CONTROL BOXES



#24050

1 24050 or 24049 WindLift 5000 lb. Ceiling Winch

- 5000 lb. Capacity
- 2500 lb. working load (1250 lbs. pulling in opposite directions)
- 90:1 Ratio
- 2" Diameter divided reel
- Holds approximately 64' of 3/16" cable
- Reel is pre-drilled and tapped to accept strap kit
- Can Replace 2 Conventional Winches
- Oven-cured epoxy coating
- Winch is designed to pull in two directions simultaneously



#24051

WindLift 5000 lb. Ceiling Winch

- Electric version of above WindLift 5000 winch
- New manual override option
- 3/4 HP motor
- 1670 RPM motor with a 6/1 reduction for a net motor RPM of 278 and drum RPM of 3.09
- Voltage: 110-115



#240483-1/2 Prime

Winch-WindLift 4800 Lb. (Motor Ready With Pulleys, Belt & 1/2 HP Prime Motor)

- 2400lb. working load (1200lbs. pulling opposite directions)
- Trouble-free worm gear design
- Divided reel
- 65:1 gear ratio



#2404812

Master Control Box for WindLift 4800LB Electric Winches

- Controls up to 4 WindLift 4800 lb. Electric Winches



#240512

Master Control Box for WL5000 Electric Winch

- Controls up to 6 WindLift 5000 lb. Electric Winches



SLINGS OR STRAPS


2



- 24054 Strap Kit
- 251400 500' Sling
- 251403 3' Sling
- 251430 30' Sling
- 251445 45' Sling
- 251460 60' Sling
- 251465 65' Sling
- 251470 70' Sling

CLEVISES & COUPLERS

3

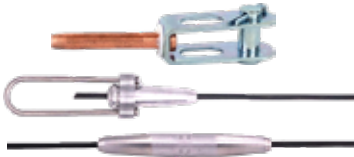

- 17070 3/16 Clevis
- 17072 3/16 Auto Locking Clevis
- 17074 3/16 Auto Locking Coupler

SCREW HOOKS

5



- 15038 268" X 3 1/2"
- 15038-CC Ceramic Coated

PULLEYS

7



- 18177 Shielded Swivel Pulley-1 3/4"
- 18180 Shielded Split Pulley-1 3/4"
- 18170 Fiberglass Pulley With Hood
- 18174 Fiberglass Split Pulley-1 3/4"
- 18171 Nylon Swivel Pulley-1 7/8"
- 18172 Nylon Split Pulley-1 7/8"
- 18354 Cast Iron w/ Needle Bearing - 3 1/2"

AMT PRIME CABLE OR SUSPENSION ROD

9



Custom Lengths Available



- | | |
|--------------------------------|--------------------------------|
| 3/16 7x7 | 3/16 7x19 |
| • 23365-0500 500' Cable | • 23366-0500 500' Cable |
| • 23365-1000 1000' Cable | • 23366-1000 1000' Cable |
| • 23365-2500 2500' Cable | • 23366-2500 2500' Cable |

- | | |
|-----------------------------|-----------------------------|
| • 17061-0390 390' Rod | • 17061-0560 560' Rod |
| • 17061-0450 450' Rod | • 17061-0590 590' Rod |
| • 17061-0490 490' Rod | • 17061-0680 680' Rod |

CABLE CLAMPS

4



- 21316 3/16 Galvanized
- 21317 3/16 Stainless
- 210316 3/16 Forged

CORD

6



- 12062-1000 3/16" X 1000'
- USA 12062-1000 3/16" X 1000'
- 12071 7/32"
- USA 12071 7/32"

CORD ADJUSTER


8



- 19300 3/16 Cord Adjuster



WINCHING SYSTEMS

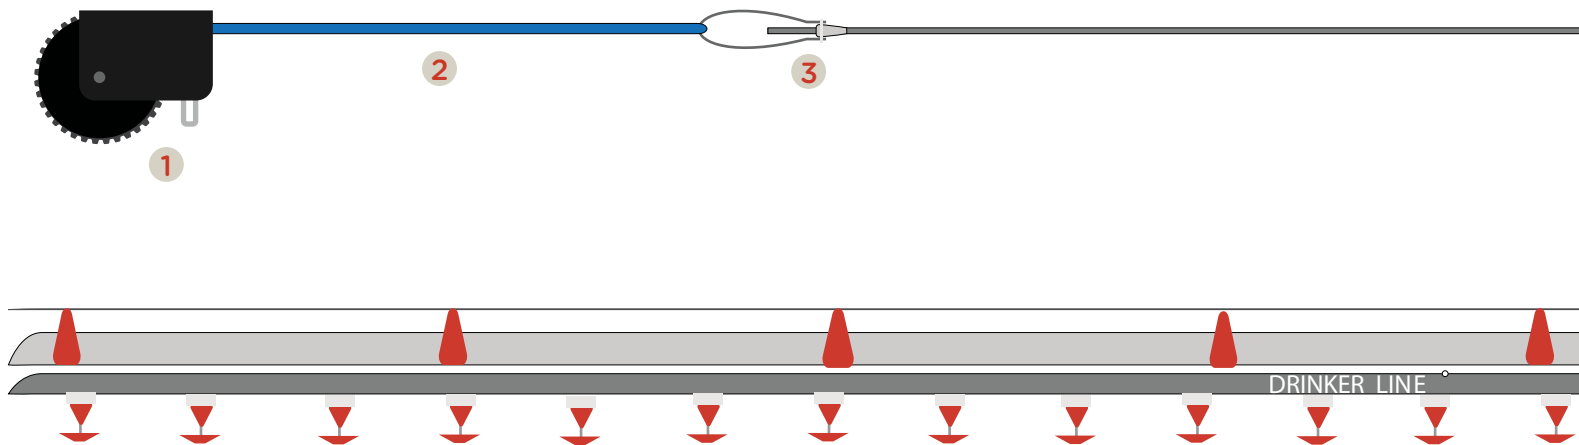

DRINKER LINE WINCHING SYSTEM

WINCHES & CONTROL BOXES

1



24025 - 2000 lb. Divided Reel Worm Gear Winch

- 2000 lb. capacity
- Self-braking
- 41:1 gear ratio
- Loop drive
- Drum Dimensions: 4 3/4" OD & 1 3/4" ID
- 1/8" Cable Capacity: 134' (67' per side)



24021 - WindLift 2000 Electric Ceiling Winch

- 2000 lb. capacity
- 9' power cord & 9' controller cord
- Holds approximately 134' (67' per side) of 1/8" cable
- Recommended 2:1 double-back for loads exceeding 1000lbs.
- 0.33 HP Motor



2404812 - Master Control Box for WindLift 4800LB Electric Winches

- Controls up to 4 WindLift 4800 lb. Electric Winches



240483 1/2 Prime - WindLift 4800 Lb. Winch (Motor Ready With Pulleys, Belt & 1/2 HP Prime Motor)

- 2400lb. working load (1200lbs. pulling opposite directions)
- Trouble-free worm gear design
- Divided reel
- 65:1 gear ratio

SLINGS OR STRAPS

2




- 253625.....25' Sling
- 253615.....15' Sling
- 253600.....500' Bulk Roll
- 240180.....Strap Kit
- 240489.....Strap Kit

CLEVISES & COUPLERS

3



- 17071.....Dead-End Clevis - 1/8"
- 17073.....1/8" Auto Dead End
- 17075.....1/8" Rod Coupler

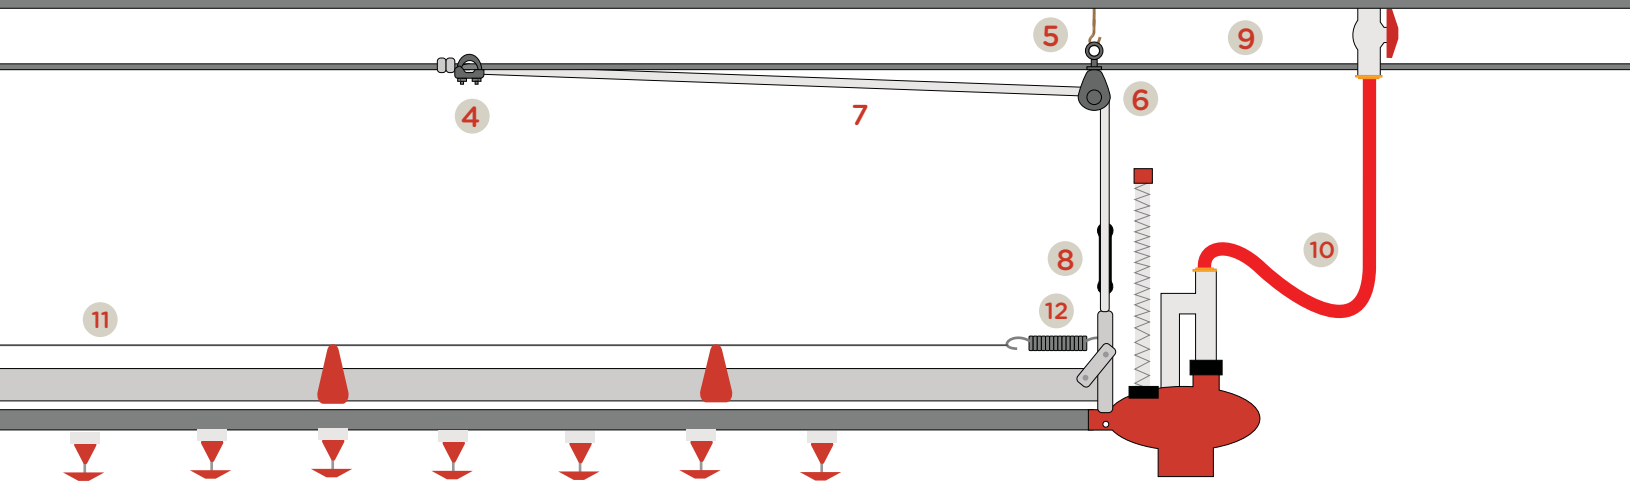

CABLE CLAMPS

4



- 21018.....1/8" Forged
- 21019.....1/8" Stainless Steel

SCREW HOOKS

5



- 15014225" (1/4") X 3 1/2"
- 15014-CCCeramic Coated

PULLEYS

6



- 18075.....225" X 3 1/2"
- 18078.....Ceramic Coated - .225" (1/4") X 3 1/2"

CORD

7



- USA12041-1000.....1/8" X 1000'
- 12041-1000.....Diamond Braid Polyester Cord-1/8"
- 12041-0500.....Diamond Braid Polyester Cord-1/8"

CORD ADJUSTER

8



- 19100.....1/8" Cord Adjuster (Short)
- 19200.....1/8" Cord Adjuster (Long)

AMT PRIME CABLE OR SUSPENSION ROD

9



1/8" 7x7

- 23185-0500.....500' Cable
- 23185-1000.....1000' Cable
- 23185-2500.....2500' Cable

1/8" 7x19

- 23186-0500.....500' Cable
- 23186-1000.....1000' Cable
- 23186-2500.....2500' Cable

- 17060-0390.....390' Rod
- 17060-0490.....490' Rod
- 17060-0560.....560' Rod
- 17060-0590.....590' Rod
- 17060-0680.....680' Rod

WATER HOSE ASSEMBLIES

10



- 26381.....3/8"
- 26121.....1/2"
- 26341.....3/4"
- 26581.....5/8"

SHOCKER WIRE

11



- 23160-1000.....1/16" X 1000' 1 X 7
- 23160-5000.....1/16" X 5000' 1 X 7
- 23167.....1/16" X 1000' 1 X 7

12


- Shocker Wire Spring
- 17015





WINCHING ACCESSORIES

CEILING WINCH HANDLES

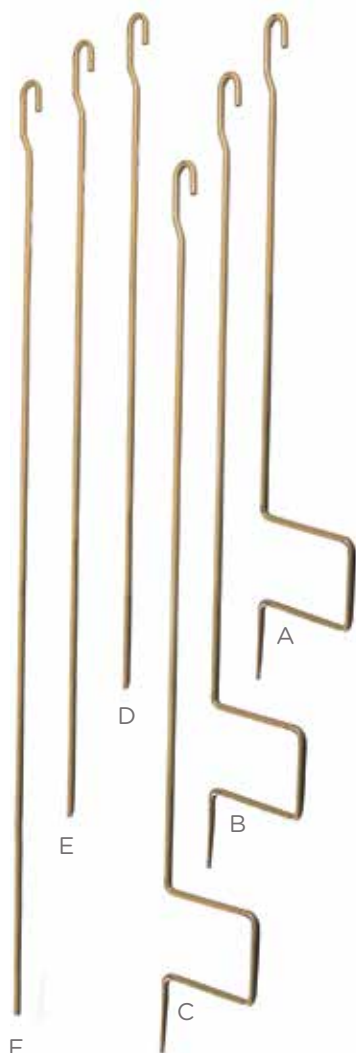

#240381

UNIVERSAL CEILING WINCH HANDLE

- One handle does it all
- Easily convert from manual to drill operated
- Adjustable from 4 ft to 8 ft length

| Item # | Description |
|--------|--|
| 240381 | Universal Ceiling Winch Handle |
| 240382 | Quick Connect Adapter for 240381 |
| 240383 | Replacement Hex Shaft for 240381 |
| 240384 | Replacement Hand Crank for 240381 |

CEILING WINCH HANDLES

- Power Crank is for raising ceiling winches with a drill
- Hand Crank is for raising ceiling winches manually

| Item # | Description |
|----------|------------------------------------|
| A 240363 | 3 ft Hand Crank for Ceiling Winch |
| B 240365 | 5 ft Hand Crank for Ceiling Winch |
| C 240368 | 8 ft Hand Crank for Ceiling Winch |
| D 240353 | 3 ft Power Crank for Ceiling Winch |
| E 240355 | 5 ft Power Crank for Ceiling Winch |
| F 240358 | 8 ft Power Crank for Ceiling Winch |

LUBRICANTS



#24210

FLUID FILM 11.75 OZ AEROSOL CAN

**Best product ever made for rust
& lubrication**

Fluid Film® is a lanolin based rust/corrosion preventative and lubricant that provides long term protection and lubrication for all metal surfaces. Fluid Film® locks out and displaces moisture while lubricating moving parts for extended periods of time. It is not easily washed off with water, but creates a barrier of protection that continues to work even in the most corrosive environments. Fluid Film® is the worldwide standard for corrosion protection and lubrication.



#24211

SHP GREASE

**Sold By the Box Only -
Box of (10) 15 Oz. Tubes**

SHP is a multipurpose, semi-synthetic extreme-pressure (EP) calcium sulfonate-complex grease for industrial, marine, mining and automotive applications in high temps, dusty, wet and corrosive environments with heavy shock loads.



This new cable has the corrosion resistance of stainless steel without the loss of strength and brittleness of stainless. In our own independent salt spray test, regular galvanized cable shows red rust at 72-144 hours. With this New AMT Prime Galvanized Cable, we stopped the test at 600 hours with no rust.

AMT PRIME CABLE 1 X 7

| Item # | Description | Standard Roll Lengths |
|--------|-------------|-----------------------|
| 23167 | 1/16 in | 1000 fr 5000 ft |

AMT PRIME CABLE 7 X 7

| Item # | Description | Standard Roll Lengths |
|--------|-------------|--------------------------------------|
| 23335 | 3/32 in | 2500 ft |
| 23185 | 1/8 in | 500 ft 1000 ft 2500 ft 5000 ft |
| 23365 | 3/16 in | 500 ft 1000 ft 2500 ft |

AMT PRIME CABLE 7 X 19

| Item # | Description | Standard Roll Lengths |
|--------|-------------|-------------------------------------|
| 23186 | 1/8 in | 500 ft 600 ft 1000 ft 2500 ft |
| 23536 | 5/32 in | 500 ft |
| 23366 | 3/16 in | 500 ft 600 ft 1000 ft 2500 ft |
| 23146 | 1/4 in | 500 ft |

WARRANTY FOR AMT PRIME CABLE

5 years prorated against rust for Prime Cable Only. (100% first 12 months. 1.67% for each month remaining after 12 months). All other galvanized and stainless steel cable carries our standard 12-month warranty. Cable is not guaranteed against breakage.

- Best grade of aircraft cable
- High tensile strength
- Easy to handle
- Flexible
- Other sizes and constructions available

**CUSTOM ROLL LENGTHS AVAILABLE.
CONTACT US FOR PRICING AND AVAILABILITY.**

AMT GALVANIZED CABLE 1 X 7

| Item # | Description | Standard Roll Lengths |
|--------|-------------|-----------------------|
| 23160 | 1/16 in | 1000 fr 5000 ft |

AMT GALVANIZED CABLE 7 X 7

| Item # | Description | Standard Roll Lengths |
|--------|-------------|---|
| 23331 | 3/32 in | 2500 ft |
| 23181 | 1/8 in | 250 ft 500 ft 1000 ft 2500 ft 3500 ft 5000 ft |
| 23361 | 3/16 in | 500 ft 1000 ft 2500 ft |

AMT GALVANIZED CABLE 7 X 19

| Item # | Description | Standard Roll Lengths |
|--------|-------------|--------------------------------------|
| 23332 | 3/32 in | 1000 ft |
| 23182 | 1/8 in | 500 ft 1000 ft 2500 ft 5000 ft |
| 23532 | 5/32 in | 500 ft 1000 ft |
| 23362 | 3/16 in | 500 ft 1000 ft 2500 ft |
| 23142 | 1/4 in | 500 ft |

AMT STAINLESS CABLE 7 X 7

| Item # | Description | Standard Roll Lengths |
|--------|----------------------|--------------------------------------|
| 23163 | 1/16 in | 1000 ft 2500 ft 5000 ft |
| 23183 | 1/8 in | 500 ft 1000 ft 2500 ft 5000 ft |
| 23363K | 3/16 in Korean Cable | 500 ft 1000 ft 2500 ft |

AMT STAINLESS CABLE 7 X 19


| Item # | Description | Standard Roll Lengths |
|--------|-------------|--------------------------------|
| 23184 | 1/8 in | 500 ft 1000 ft 2500 ft |
| 23534 | 5/32 in | 500 ft |
| 23364 | 3/16 in | 500 ft 1000 ft 2500 ft |
| 23144 | 1/4 in | *Call for custom roll lengths* |



SUSPENSION ROD & WIRE

SUSPENSION ROD

- The final piece in our cable-free winching system
- Use 1/8 in to winch drinkers and 3/16 in to winch feeders, nests and ventilation inlets
- 1/8 in & 3/16 in stocked in multiple roll lengths
- Use 3/16 in rod with #17070 Suspension Dead-End Clevis
- Use 1/8 in rod with our #17071 Suspension Dead-End Clevis
- Made from oil tempered spring wire
- Will not stretch like cable and regular non-tempered wire
- Other lengths available by special order

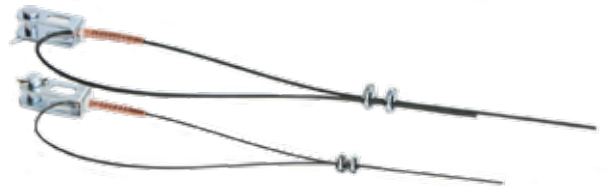

| Item # | Description | Standard Lengths |
|--------|--------------------------------|--|
| 17060 | Suspension Rod - 1/8 in | 390 ft 490 ft 560 ft 590 ft 680 ft |
| 17061 | Suspension Rod - 3/16 in | 390 ft 450 ft 490 ft 560 ft 590 ft 680 ft |
| 17062 | Stainless Steel Wire - 1/8 in | 400 ft 500 ft 600 ft |
| 17063 | Stainless Steel Wire - 3/16 in | 500 ft 600 ft |

HIGH TENSILE WIRE - 12.5 GAUGE

- Highest grade 200,000 PSI
- Stocked in 2000 ft rolls
- Inexpensive alternative for ventilation main line



SUSPENSION DEAD END CLEVIS

- For professional connection of 1/8 in or 3/16 in suspension rod to cable or winch straps
- Crimp at least nine times with item #14002 or with the smallest hole on
- To use correctly, loop the suspension rod in a wide arch back to itself, and secure with two cable clamps

| Item # | Description | Standard Package |
|---------|---|------------------|
| B 17070 | Suspension Dead End Clevis - 3/16 in | 1 |
| A 17071 | Suspension Dead End Clevis - 1/8 in | 1 |
| D 17072 | Suspension Dead End Clevis - 3/16" (Auto Locking) | 1 |
| C 17073 | Suspension Dead End Clevis - 1/8" (Auto Locking) | 1 |
| F 17074 | 3/16" Steel Rod Coupler | 1 |
| E 17075 | 1/8" Steel Rod Coupler | 1 |



CABLE CLAMPS - WIRE ROPE CLIPS

| Item # | Description | Standard Package |
|--------------|-------------------------------|------------------|
| A 21018 | 1/8" Galvanized | 2000 |
| B 21316 | 3/16" Galvanized | 1000 |
| 21014 | 1/4" Galvanized | 500 |
| 21015 | 1/4" Stainless Steel | 100 |
| 21015-Forged | 1/4" Stainless Steel (Forged) | 100 |
| 21016 | 1/16" Galvanized | 500 |
| 21056 | 5/16" Galvanized | 100 |
| 21038 | 3/8" Galvanized | 100 |
| 21019 | 1/8" Stainless Steel | 100 |
| C 21317 | 3/16" Stainless Steel | 100 |
| 21057 | 5/16" Stainless Steel | 100 |
| 210018 | 1/8" Galvanized Drop Forged | 500 |
| 210316 | 3/16" Galvanized Drop Forged | 400 |




CORD & ROPE

- Made of the finest polyester yarn available
- Less stretch and longer life than cheaper nylon cords
- Used for winching curtains, feeders, drinkers, ventilation boards, tunnel doors, etc.
- Use our special low stretch, coated 3/16in cord, **#12062** along with our **#19300** Cord Adjuster for feeder drops
- Use 7/32in low stretch, coated cord for breeder nest drops, item **#12071**
- **#12064** Super Cord is an extremely strong polyester cord with an enhanced core that can be used in place of cable or straps on a winch drum to maximize the lifting capacity of the winch. This cord has a break strength of 3,255 lbs.
- We now offer many of our cords that are **MADE IN THE USA** as an option for customers. These cords have the prefix USA before the item number.

| Item # | Description | Standard Package |
|---------------|--|------------------|
| 12040 | 1/8in (#4) x 1000ft Interlock Cord | 12 Rolls |
| 12041-0500 | 1/8in (#4) x 500ft Low Stretch Diamond Braid | 16 Rolls |
| 12041-1000 | 1/8in (#4) x 1000ft Low Stretch Diamond Braid | 12 Rolls |
| 12051 | 5/32in (#5) x 1000ft Standard Diamond Braid | 4 Rolls |
| 12061 | 3/16in (#6) Black x 1000ft Ski Rope | 1 Roll |
| 12060 | 3/16in (#6) x 1000ft Standard Diamond Braid | 4 Rolls |
| 12062-0500 | 3/16in (#6) x 500ft Low Stretch Diamond Braid | 8 Rolls |
| 12062-1000 | 3/16in (#6) x 1000ft Low Stretch Diamond Braid | 4 Rolls |
| 12064 | 3/16in (#6) x 600ft Black Super Cord | 1 Roll |
| 12071 | 7/32in (#7) x 1000ft Low Stretch Diamond Braid | 4 Rolls |
| 12080 | 1/4in Black x 1000ft Ski Rope | 1 Roll |
| USA12041-1000 | 1/8in (#4) x 1000ft Low Stretch Diamond Braid | 12 Rolls |
| USA12062-1000 | 3/16in (#6) x 1000ft Low Stretch Diamond Braid | 4 Rolls |

STA-KONS

- Our Sta-Kons are the only ones in the industry made of copper alloy instead of steel. They will not react with and weaken stainless steel cable.
- Provides attachment point for tying cord to cable.
- Open Sta-Kons do not need to be threaded on cable before installation
- Install with Sta-Kon tool **#16001** shown on the Tools **Page 45**



| Item # | Description | Standard Package |
|---------|-----------------|------------------|
| D 16181 | 1/8 in Regular | 500 |
| E 16182 | 1/8 in Open | 500 |
| F 16316 | 3/16 in Regular | 500 |



CORD ADJUSTERS

- Allows quick and easy adjustment of cord

| Item # | Description | Standard Package |
|---------|--------------------|------------------|
| A 19100 | 1/8 in x 1 1/2 in | 1000 |
| B 19200 | 1/8 in x 3 in | 500 |
| C 19300 | 3/16 in x 3 1/2 in | 500 |



#19400

| Item # | Description | Standard Package |
|--------|----------------------|------------------|
| 19400 | Turtle Rope Fairlead | 350 |



CORD, ROPE & CABLE FITTINGS



CURTAIN THUMB NUTS

The Original Azuma Nuts


- For attaching cord directly to cable
- Provides easy installation and adjustment
- Best for do-it-yourself installation and adjustment
- Best for ventilation boards
- New improved design will not strip out

| Item # | Description | Standard Package |
|---------|-----------------------------------|------------------|
| A 16500 | Curtain Thumb Nuts - 1/8 in Black | 300 |
| B 16501 | Curtain Thumb Nuts - 3/16 in Red | 300 |

CABLE ADJUSTERS

- Allows quick and easy adjustment of cable


| Item # | Description | Standard Package |
|---------|---|------------------|
| C 19000 | Cable Adjusters - 2 in Galvanized Regular | 1000 |
| D 19003 | Cable Adjusters - 3 in Galvanized Long | 500 |
| E 19004 | Cable Adjusters - 3 in Chore-Time Style | 500 |
| F 19005 | Cable Adjusters - 3 in Flat | 500 |

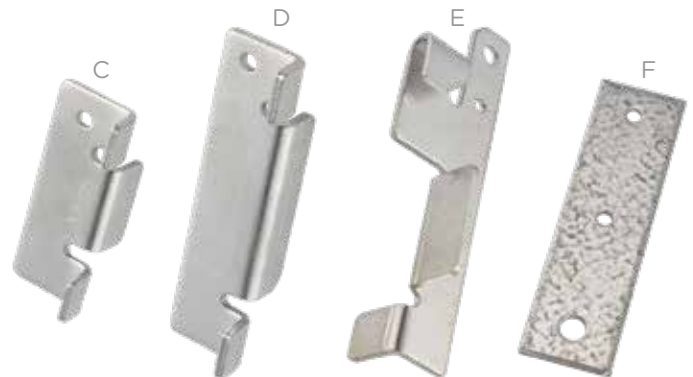

CABLE SLEEVES & STOPS

- All aluminum or all copper construction
- Install with Nicopress tools
- For permanent cable to cable connections
- Cable Stops prevent cable ends from fraying
- Use aluminum for galvanized cable - copper for stainless steel cable

| Item # | Description | Standard Package |
|----------|-------------------------------------|------------------|
| G 14019 | Copper Cable Stops - 1/8 in | 1000 |
| H 14183 | Copper Sleeves - 1/8 in | 1000 |
| I 14317 | Copper Sleeves - 3/16 in | 1000 |
| J 14018 | Aluminum Cable Stops - 1/8 in | 1000 |
| K 14031 | Aluminum Cable Stops - 3/16 in | 1000 |
| 14032 | Aluminum Cable Stops - 3/32 in | 1000 |
| L 14116 | Aluminum Sleeves - 1/16 in | 1000 |
| 14141 | Aluminum Sleeves - 1/4 in | 1000 |
| M 14181 | Aluminum Sleeves - 1/8 in | 1000 |
| N 14182 | Aluminum Sleeves - 1/8 in x 3/16 in | 1000 |
| O 14316 | Aluminum Sleeves - 3/16 in | 1000 |
| P 14332 | Aluminum Sleeves - 3/32 in | 1000 |
| 14532 | Aluminum Sleeves - 5/32 in | 1000 |
| 14018-NB | Aluminum Cable Stop - 1/8" | 1000 |
| 14031-NB | Aluminum Cable Stop - 3/16" | 1000 |

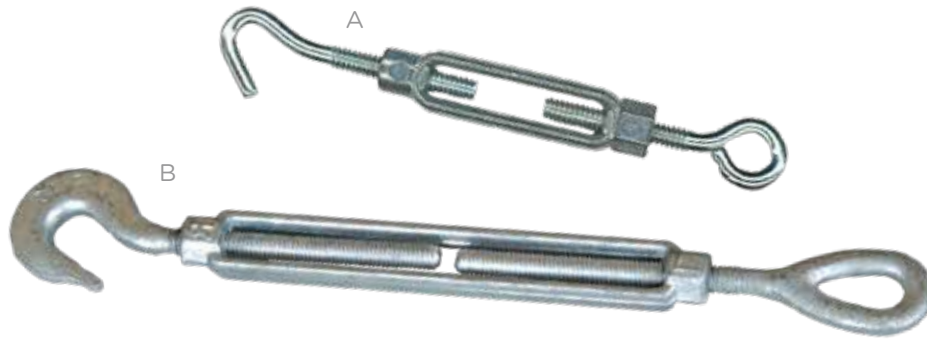

TURNBUCKLES

- 100/Box
- Hooks & eyes are steel with bright zinc finish
- Bodies are high-tensile, zinc-alloy die casting with smooth, shiny finish

| Hook & Eye | Length | | | Body | | Inside Eye Diameter |
|------------|--------|--------------|---------|-----------|----------|---------------------|
| | Item # | Thread | Minimum | Maximum | Length | Diameter |
| A | 15025 | 5/16 in - 18 | 7 in | 9 3/4 in | 3 3/4 in | 3/4 in |
| B | 15026 | 3/8 in - 15 | 12 in | 17 1/2 in | 7 in | 15/16 in |

TENSION SPRINGS

- Keeps ventilation cables tight
- American Made
- Wide Selection
- 10/Box
- With end clips for extra security



| Item Number | Description |
|-------------|-------------|
| 17026 | 110 lb |
| C 17029 | 160 lb |
| 17031 | 180 lb |
| 17034 | 240 lb |

SHOCKER WIRE SPRING


- Tension spring for shocker wire on feeders and drinkers
- 250/Box



| Item Number | Description |
|-------------|-------------------------------------|
| D 17015 | Spring for Shocker Wire on Drinkers |
| E 17016 | Spring for Shocker Wire on Feeders |
| F 21516 | Shocker Wire Clamp |

CABLE THIMBLES

| Item Number | Description |
|-------------|--|
| G 21401 | Cable Thimble - 1/8 in Zinc Plated |
| 21401-SS | Cable Thimble - 1/8 in Stainless Steel |
| 21402 | Cable Thimble - 3/16 in Zinc Plated |
| 21404 | Cable Thimble - 1/4 in Hot Dipped Galvanized |

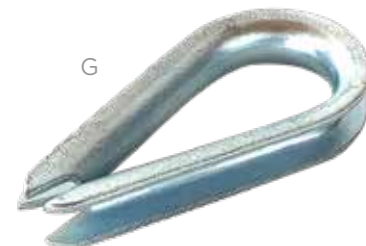



MOTORS AND POWER TRANSMISSION

AMT PRIME MOTORS



AMT Prime Auger Motors

| Item # | Description |
|--------|--------------------|
| 30050 | 1/2 HP Auger Motor |
| 30075 | 3/4 HP Auger Motor |
| 30100 | 1 HP Auger Motor |
| 30150 | 1.5 HP Auger Motor |



AMT Prime Fan Motors

| Item # | Description |
|--------|------------------|
| 32050 | 1/2 HP Fan Motor |
| 32100 | 1 HP Fan Motor |
| 32150 | 1.5 HP Fan Motor |



AMT Prime Farm Duty Motors

| Item # | Description |
|--------|------------------------|
| 34050 | 1/2 HP Farm Duty Motor |
| 34075 | 3/4 HP Farm Duty Motor |
| 34100 | 1 HP Farm Duty Motor |

ACCU-LINK BELT



PULLEY SHEAVES



| Item # | Description |
|--------|------------------------------|
| 455104 | AK-104 x 1 in Pulley Sheave |
| 45584 | AK-84 x 1 in Pulley Sheave |
| 45594 | AK-94 x 1 in Pulley Sheave |
| 457015 | Timing Belt 700H150 |
| 45820 | AK-20 x 5/8 in Pulley Sheave |
| 45822 | AK-22 x 5/8 in Pulley Sheave |
| 45823 | AK-23 x 5/8 in Pulley Sheave |
| 45825 | AK-25 x 5/8 in Pulley Sheave |
| 45826 | AK-26 x 5/8 in Pulley Sheave |
| 45827 | AK-27 x 5/8 in Pulley Sheave |
| 45828 | AK-28 x 5/8 in Pulley Sheave |
| 45830 | AK-30 x 5/8 in Pulley Sheave |
| 45831 | AK-31 x 5/8 in Pulley Sheave |

| Item # | Description |
|---------|--|
| 45832 | AK-32 x 5/8 in Pulley Sheave |
| 45834 | AK-34 x 5/8 in Pulley Sheave |
| 45835 | AK-35 x 5/8 in Pulley Sheave |
| 45839 | AK-39 x 5/8 in Pulley Sheave |
| 45841 | AK-41 x 5/8 in Pulley Sheave |
| 45843 | AK-43 x 5/8 in Pulley Sheave |
| 45844 | AK-44 x 5/8 in Pulley Sheave |
| 45851 | AK-51 x 5/8 in Pulley Sheave |
| 45854 | AK-54 x 5/8 in Pulley Sheave |
| 45884AL | AK-84 x 5/8 in Pulley Sheave |
| 45925 | 2AK-25 x 3/4 in Double Pulley Sheave |
| 46128 | 2BK-28 x 5/8 in Double Pulley Sheave |
| 46225 | 2AK-25 x 1 1/8 in Double Pulley Sheave |



AMT PRIME POWER V-BELTS



| Item # | Description |
|--------|----------------------------------|
| 43021 | Prime Power V-Belt - A21 (4L230) |
| 43023 | Prime Power V-Belt - A23 (4L250) |
| 43024 | Prime Power V-Belt - A24 (4L260) |
| 43029 | Prime Power V-Belt - A29 (4L310) |
| 43030 | Prime Power V-Belt - A30 (4L320) |
| 43031 | Prime Power V-Belt - A31 (4L330) |
| 43032 | Prime Power V-Belt - A32 (4L340) |
| 43034 | Prime Power V-Belt - A34 (4L360) |
| 43035 | Prime Power V-Belt - A35 (4L370) |
| 43036 | Prime Power V-Belt - A36 (4L380) |
| 43037 | Prime Power V-Belt - A37 (4L390) |
| 43038 | Prime Power V-Belt - A38 (4L400) |
| 43039 | Prime Power V-Belt - A39 (4L410) |
| 43040 | Prime Power V-Belt - A40 (4L420) |
| 43041 | Prime Power V-Belt - A41 (4L430) |
| 43042 | Prime Power V-Belt - A42 (4L440) |
| 43043 | Prime Power V-Belt - A43 (4L450) |
| 43044 | Prime Power V-Belt - A44 (4L460) |
| 43045 | Prime Power V-Belt - A45 (4L470) |
| 43046 | Prime Power V-Belt - A46 (4L480) |
| 43047 | Prime Power V-Belt - A47 (4L490) |
| 43048 | Prime Power V-Belt - A48 (4L500) |
| 43049 | Prime Power V-Belt - A49 (4L510) |
| 43051 | Prime Power V-Belt - A51 (4L530) |
| 43052 | Prime Power V-Belt - A52 (4L540) |
| 43053 | Prime Power V-Belt - A53 (4L550) |
| 43055 | Prime Power V-Belt - A55 (4L570) |
| 43056 | Prime Power V-Belt - A56 (4L580) |

| Item # | Description |
|--------|----------------------------------|
| 43057 | Prime Power V-Belt - A57 (4L590) |
| 43058 | Prime Power V-Belt - A58 (4L600) |
| 43059 | Prime Power V-Belt - A59 (4L610) |
| 43060 | Prime Power V-Belt - A60 (4L620) |
| 43061 | Prime Power V-Belt - A61 (4L630) |
| 43063 | Prime Power V-Belt - A63 (4L650) |
| 43065 | Prime Power V-Belt - A65 (4L670) |
| 43069 | Prime Power V-Belt - A69 (4L710) |
| 43071 | Prime Power V-Belt - A71 (4L730) |
| 43073 | Prime Power V-Belt - A73 (4L750) |
| 43077 | Prime Power V-Belt - A77 (4L790) |
| 43085 | Prime Power V-Belt - A85 (4L870) |
| 43087 | Prime Power V-Belt - A87 (4L890) |
| 43091 | Prime Power V-Belt - A91 (4L930) |
| 44032 | Prime Power Cogged V-Belt - AX32 |
| 44035 | Prime Power Cogged V-Belt - AX35 |
| 44038 | Prime Power Cogged V-Belt - AX38 |
| 44039 | Prime Power Cogged V-Belt - AX39 |
| 44043 | Prime Power Cogged V-Belt - AX43 |
| 44045 | Prime Power Cogged V-Belt - AX45 |
| 44046 | Prime Power Cogged V-Belt - AX46 |
| 44047 | Prime Power Cogged V-Belt - AX47 |
| 44048 | Prime Power Cogged V-Belt - AX48 |
| 44049 | Prime Power Cogged V-Belt - AX49 |
| 44052 | Prime Power Cogged V-Belt - AX52 |
| 44053 | Prime Power Cogged V-Belt - AX53 |
| 44056 | Prime Power Cogged V-Belt - AX56 |
| 44058 | Prime Power Cogged V-Belt - AX58 |
| 44059 | Prime Power Cogged V-Belt - AX59 |
| 44061 | Prime Power Cogged V-Belt - AX61 |
| 44069 | Prime Power Cogged V-Belt - AX69 |
| 44075 | Prime Power Cogged V-Belt - AX75 |
| 44077 | Prime Power Cogged V-Belt - AX77 |

POWER CORDS



| Item # | Description | Package |
|---------|---------------------------------|---------|
| A 28001 | 115v 118 in (3M) 16/3 SJT Black | 50 |
| B 28002 | 230v 118 in (3M) 16/3 SJT Black | 50 |
| C 28003 | 115v 118 in (3M) 14/3 SJT Black | 50 |
| D 28004 | 230v 118 in (3M) 14/3 SJT Black | 50 |

| Item # | Description | Package |
|---------|---|---------|
| E 28005 | 115v Receptacle NEMA 5-15R -115v 118in (3M) 14/3 SJT Black | 50 |
| F 28006 | 230v 118 in (3M) 14/3 SJT Black | 50 |
| G 28007 | 230 volt Receptacle 14/3 SJT | 50 |
| 28024 | UL/CUL Nema 6-15p plug, other end with 3pcs fork terminal, SJTOW 14/3C, 10ft length | 40 |



MOTORS AND POWER TRANSMISSION



BESTORQ V-BELTS

| Item # | Description |
|--------|----------------------|
| 40000 | V-Belt Sleeve Only |
| 40015 | V-Belt - A15 (4L170) |
| 40016 | V-Belt - A16 (4L180) |
| 40019 | V-Belt - A19 (4L210) |
| 40020 | V-Belt - A20 (4L220) |
| 40021 | V-Belt - A21 (4L230) |
| 40022 | V-Belt - A22 (4L240) |
| 40023 | V-Belt - A23 (4L250) |
| 40024 | V-Belt - A24 (4L260) |
| 40025 | V-Belt - A25 (4L270) |
| 40026 | V-Belt - A26 (4L280) |
| 40027 | V-Belt - A27 (4L290) |
| 40028 | V-Belt - A28 (4L300) |
| 40029 | V-Belt - A29 (4L310) |
| 40030 | V-Belt - A30 (4L320) |
| 40031 | V-Belt - A31 (4L330) |
| 40032 | V-Belt - A32 (4L340) |
| 40033 | V-Belt - A33 (4L350) |
| 40034 | V-Belt - A34 (4L360) |
| 40035 | V-Belt - A35 (4L370) |
| 40036 | V-Belt - A36 (4L380) |
| 40037 | V-Belt - A37 (4L390) |
| 40038 | V-Belt - A38 (4L400) |
| 40039 | V-Belt - A39 (4L410) |
| 40040 | V-Belt - A40 (4L420) |
| 40041 | V-Belt - A41 (4L430) |
| 40042 | V-Belt - A42 (4L440) |
| 40043 | V-Belt - A43 (4L450) |
| 40044 | V-Belt - A44 (4L460) |
| 40045 | V-Belt - A45 (4L470) |


| Item # | Description |
|--------|----------------------|
| 40046 | V-Belt - A46 (4L480) |
| 40047 | V-Belt - A47 (4L490) |
| 40048 | V-Belt - A48 (4L500) |
| 40049 | V-Belt - A49 (4L510) |
| 40050 | V-Belt - A50 (4L520) |
| 40051 | V-Belt - A51 (4L530) |
| 40052 | V-Belt - A52 (4L540) |
| 40053 | V-Belt - A53 (4L550) |
| 40054 | V-Belt - A54 (4L660) |
| 40055 | V-Belt - A55 (4L570) |
| 40056 | V-Belt - A56 (4L580) |
| 40057 | V-Belt - A57 (4L590) |
| 40058 | V-Belt - A58 (4L600) |
| 40059 | V-Belt - A59 (4L610) |
| 40060 | V-Belt - A60 (4L620) |
| 40061 | V-Belt - A61 (4L630) |
| 40062 | V-Belt - A62 (4L640) |
| 40063 | V-Belt - A63 (4L650) |
| 40064 | V-Belt - A64 (4L660) |
| 40065 | V-Belt - A65 (4L670) |
| 40068 | V-Belt - A68 (4L700) |
| 40069 | V-Belt - A69 (4L710) |
| 40071 | V-Belt - A71 (4L730) |
| 40073 | V-Belt - A73 (4L750) |
| 40074 | V-Belt - A74 (4L760) |
| 40075 | V-Belt - A75 (4L770) |
| 40077 | V-Belt - A77 (4L790) |
| 40079 | V-Belt - A79 (4L810) |
| 40083 | V-Belt - A83 (4L850) |
| 40085 | V-Belt - A85 (4L870) |
| 40087 | V-Belt - A87 (4L890) |
| 40088 | V-Belt - A88 (4L900) |
| 40091 | V-Belt - A91 (4L930) |
| 40129 | V-Belt - B29 (5L320) |
| 40133 | V-Belt - B33 (5L360) |
| 40135 | V-Belt - B35 (5L380) |
| 40138 | V-Belt - B38 (5L410) |
| 40144 | V-Belt - B44 (5L470) |

| Item # | Description |
|--------|---------------------------|
| 40154 | V-Belt - B54 (5L570) |
| 40158 | V-Belt - B58 (5L610) |
| 41031 | V-Belt - AX31 (Cogged) |
| 41032 | V-Belt - AX32 (Cogged) |
| 41033 | V-Belt - AX33 (Cogged) |
| 41034 | V-Belt - AX34 (Cogged) |
| 41035 | V-Belt - AX35 (Cogged) |
| 41036 | V-Belt - AX36 (Cogged) |
| 41037 | V-Belt - AX37 (Cogged) |
| 41038 | V-Belt - AX38 (Cogged) |
| 41039 | V-Belt - AX39 (Cogged) |
| 41041 | V-Belt - AX41 (Cogged) |
| 41042 | V-Belt - AX42 (Cogged) |
| 41043 | V-Belt - AX43 (Cogged) |
| 41044 | V-Belt - AX44 (Cogged) |
| 41045 | V-Belt - AX45 (Cogged) |
| 41046 | V-Belt - AX46 (Cogged) |
| 41047 | V-Belt - AX47 (Cogged) |
| 41048 | V-Belt - AX48 (Cogged) |
| 41049 | V-Belt - AX49 (Cogged) |
| 41050 | V-Belt - AX50 (Cogged) |
| 41051 | V-Belt - AX51 (Cogged) |
| 41052 | V-Belt - AX52 (Cogged) |
| 41053 | V-Belt - AX53 (Cogged) |
| 41056 | V-Belt - AX56 (Cogged) |
| 41057 | V-Belt - AX57 (Cogged) |
| 41058 | V-Belt - AX58 (Cogged) |
| 41059 | V-Belt - AX59 (Cogged) |
| 41060 | V-Belt - AX60 (Cogged) |
| 41061 | V-Belt - AX61 (Cogged) |
| 41064 | V-Belt - AX64 (Cogged) |
| 41065 | V-Belt - AX65 (Cogged) |
| 41069 | V-Belt - AX69 (Cogged) |
| 41077 | V-Belt - AX77 (Cogged) |
| 41149 | V-Belt - BX49 (Cogged) |
| 42054 | V-Belt - A54K (Kevlar) |
| 43270 | V-Belt - A3L270 (3L270) |
| 441250 | V-Belt - XPA1250 (Cogged) |




PULLEY BRACKET / CHAIN SPROCKET ASSEMBLY

| Item # | Description | Standard Package |
|-----------|--|------------------|
| A 17020 | Pulley Bracket w/ Chain Sprocket Assembly | 20 |
| 17010 | Pulley Bracket Only | 20 |
| 17021 | Chain Sprocket Only with Strap | 20 |
| B 17022 | Chain Only - #40 x 30 in | 40 |
| 17022-100 | Roller Chain - #40 x 100 ft | 1 |
| C 17027 | Roller Chain - Stainless Steel #40 x 30 in | 4 |
| 17027-100 | Roller Chain - #40 x 100 ft Stainless Steel | 1 |
| D 17028 | Master Link | 1 |
| 17023 | U-Bolt Only with Nuts | 20 |
| E 17024 | Horizontal Sprocket Assembly | 20 |
| 17030 | Master Link - #40 Stainless Steel Roller Chain | 1 |
| F 17032 | Vertical Through Wall Sprocket Assembly | 24 |

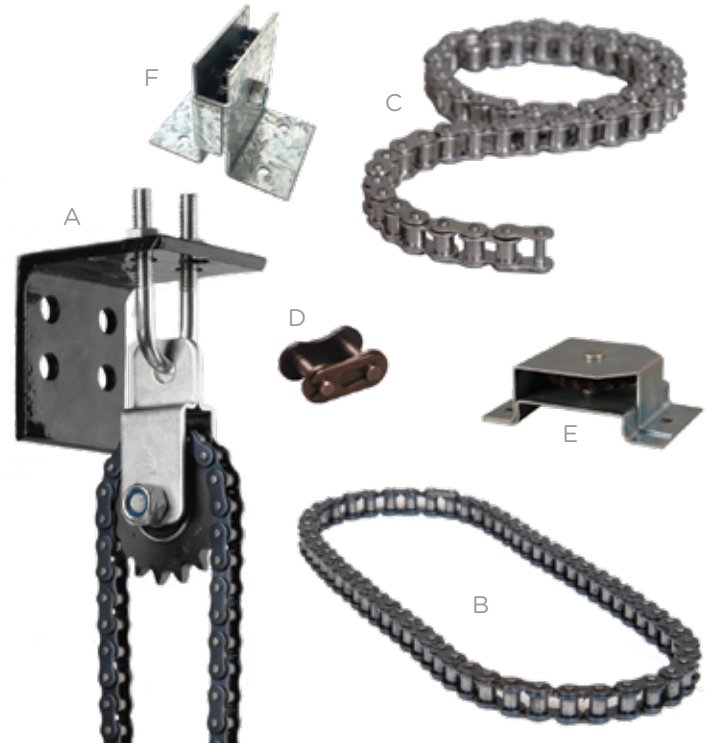

DOUBLE LOOP CHAIN

| Item # | Description | Standard Package |
|------------|---------------------------------------|------------------|
| G 19601 | Galvanized Steel Double Loop Chain #2 | 100 ft |
| 19601-SS | Stainless Steel Double Loop Chain #1 | 100 ft |
| 19602 | Galvanized Double Loop Chain #2 | 200 ft |
| H 19602-SS | Chain #2 Stainless Steel | 100 ft |
| 19603 | Double Loop Chain #3 | 200 ft |
| 19610 | Double Loop Chain #1 | 100 ft |
| 19620 | Double Loop Chain #2 | 250 ft |

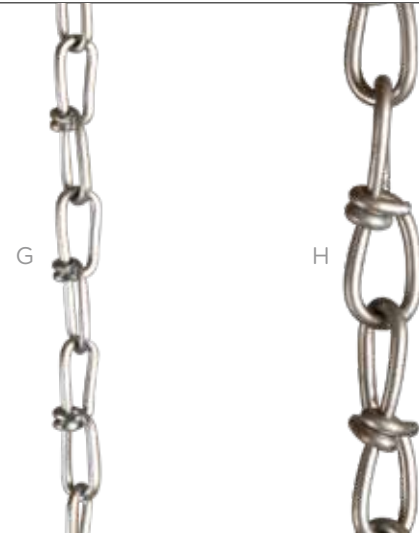

#19635

SASH CHAIN

- #35 Zinc Plated
- 250 ft/box



#17018

CARABINER CLIPS

- 3/16 in



#17019

QUICK LINK

- 1/4 in
- 100/bag



#17081

SCREW PIN ANCHOR SHACKLE

- 5/16 in



PULLEYS

COMPOSITE/FIBERGLASS STRAP PULLEYS

| Item # | Description | Standard Package |
|---------|---------------------------------------|------------------|
| A 18075 | 7/8 in Nylon Swivel | 1000 |
| B 18170 | 1 3/4 in Red Nylon Swivel with Hood | 300 |
| C 18171 | 1 3/4 in White Nylon Swivel | 400 |
| D 18172 | 1 3/4 in White Nylon Split | 400 |
| E 18174 | 1 3/4 in Red Nylon Split | 400 |
| F 18176 | 1 3/4 in Fiberglass Composite Sheave | 1000 |
| G 18177 | 1 3/4 in Red Nylon Swivel w/Shields | 300 |
| H 18258 | 2 1/2" Red Nylon Composite w/ Shields | 100 |
| I 18180 | 1 3/4 in Red Nylon Split w/ Shields | 300 |
| J 18257 | 2 1/2 in Fiberglass Composite | 100 |
| K 18355 | 3 1/2 in White Nylon Pulley | 50 |
| L 18357 | 3 1/2 in Red Nylon Pulley | 50 |
| M 18350 | 3 1/2 in Cast Sheave | 50 |
| N 18360 | 3 1/2 in Fiberglass Composite Sheave | 130 |



STEEL STRAP PULLEYS

| Item # | Description | Standard Package |
|---------|------------------------------------|------------------|
| N 18151 | 1 1/2 in Steel Strap | 250 |
| O 18154 | 1 1/2 in Steel with Roller Bearing | 200 |
| P 18251 | 2 1/2 in Steel Strap | 100 |
| Q 18254 | 2 1/2 in Steel with Roller Bearing | 100 |
| R 18275 | 2 3/4 in Heavy-Duty Steel Strap | 100 |



CAST IRON STRAP PULLEYS

| Item Number | Description | Standard Package |
|-------------|-----------------------------------|------------------|
| S 18351 | 3 1/2 in Cast Iron | 25 |
| T 18352 | 3 1/2 in Cast with I-Bolt | 25 |
| U 18354 | 3 1/2 in Cast with Needle Bearing | 25 |
| V 18454 | 4 1/2 in Cast with Needle Bearing | 20 |
| W 18455 | 4 1/2" Cast Bearing w/Shields | 20 |





BRACKET PULLEYS

| Item # | Description | Standard Package |
|---------------------|---|------------------|
| A 18090 | Bracket Pulley for Vent Doors | 120 |
| B 18256 | 2 1/2 in Steel Through Wall Bracket with Roller Bearing | 30 |
| C 18356 | 3 1/2 in Cast Iron Through Wall Bracket with Needle Bearing | 24 |
| D 18353-Cast | 3 1/2 in Horizontal Cast Iron | 20 |
| E 18353 - Composite | 3 1/2 in Horizontal Composite Pulley | 20 |
| F 18358 | 3 1/2 in Vertical Fiberglass Composite | 20 |
| G 18361 | 3 1/2 in Double Back Cast Iron | 10 |
| H 18363 | 3 1/2 in Horizontal Cast w/ Bearing | 20 |

**MAKE THE
UPGRADE TO
STAINLESS**



STAINLESS STEEL PULLEYS

| Item # | Description | Standard Package |
|------------|---------------------------------------|------------------|
| I 18078 | 7/8 in with Red Sheave | 1000 |
| J 18138 | 1 3/8 in Stainless Steel Split Pulley | 250 |
| K 18151-SS | 1 1/2 in Steel Strap | 250 |
| L 18170-SS | 1 3/4 in Red Fiberglass with Hood | 300 |
| M 18171-SS | 1 7/8 in White Nylon Swivel | 400 |
| N 18172-SS | 1 7/8 in White Nylon Split | 400 |
| O 18174-SS | 1 3/4 in Red Nylon Split | 400 |
| P 18251-SS | 2 1/2 in Short Steel Strap | 100 |

| Item # | Description | Standard Package |
|------------|--|------------------|
| Q 18254-SS | 2 1/2 in Steel with Roller Bearing | 100 |
| R 18353-SS | 3 1/2 in Horizontal Composite with Stainless Steel Bracket | 20 |
| S 18354-SS | 3 1/2 in Cast Wheel with Bearing | 25 |
| T 18257-SS | 2 1/2 in Cast Wheel with Bearing | 25 |
| U 18357-SS | 3/12 in Red Nylon Composite | 50 |
| V 18358-SS | 3 1/2 in Vertical Composite with Stainless Steel Bracket | 20 |
| W 18255-SS | 2 1/2" w/ Stainless Steel Straps and Hardware | 100 |



HOSE & FITTINGS

PIPE HANGERS

- Half clamp with nail
- Barbed nail for extra gripping strength in wood
- For installing water distribution piping
- Manufactured from high impact, high density polyethylene



| Item # | Description | Standard Package |
|--------|-------------------|------------------|
| 26020 | 3/4 in (1/2 PVC) | 50 |
| 26021 | 1 in (3/4 in PVC) | 50 |

HOSE CLAMPS

- American Made
- Stainless Steel



| Item # | Description | Standard Package |
|--------|------------------|------------------|
| 26001 | 1/4 in - 5/8 in | 100 |
| 26002 | 1/2 in - 1 1/8 | 100 |
| 26004 | 2 9/16" - 3 1/2" | 50 |
| 26005 | 3" - 4" | 50 |
| 26006 | 3 1/2" - 5 1/2" | 50 |

PIPE STRAPS - 2 HOLE

- Zinc plated
- For mounting gas and water pipe
- Made to fit our "Z" Bracket, Item #17200




| Item # | Description | Standard Package |
|--------|---------------------------|------------------|
| 26010 | Metal Pipe Strap - 3/4 in | 500 |
| 26011 | Metal Pipe Strap - 1 in | 500 |
| 26015 | Metal Pipe Strap - 3 in | 100 |

PIPE STRAPS - 1 HOLE

- Zinc Plated



| Item # | Description | Standard Package |
|--------|---------------------------------------|------------------|
| 26012 | Metal Pipe Strap - 1/2 in w/ one hole | 1000 |
| 26013 | Metal Pipe Strap - 3/4 in w/ one hole | 500 |
| 26014 | Metal Pipe Strap - 1 in w/ one hole | 500 |

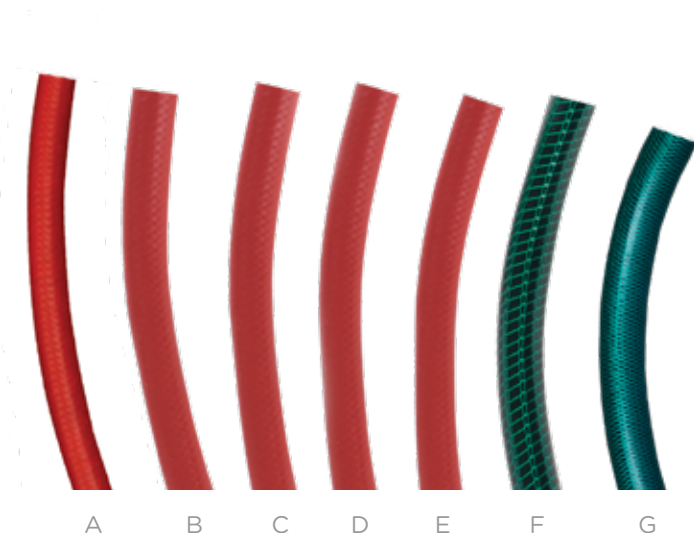

GAS, WATER & AIR HOSE

| Item # | Description | Standard Package |
|---------|-------------------------------|------------------|
| A 26380 | Vapor LPG Gas Hose | 250 ft Roll |
| B 26381 | Air & Water hose - 3/8 in Red | 250 ft Roll |
| C 26121 | Air & Water hose - 1/2 in Red | 250 ft Roll |
| D 26581 | Air & Water hose - 5/8 in Red | 250 ft Roll |
| E 26341 | Air & Water hose - 3/4 in Red | 250 ft Roll |
| F 26125 | Garden Hose - 1/2 in Green | 250 ft Roll |
| G 26345 | Garden Hose - 3/4 in Green | 250 ft Roll |

PLUMBING Z BRACKET

- Offset bracket for pipe
- Pre-drilled to fit our 3/4 in and 1 in Pipe Straps
- 200/Box



We now make pre-cut and crimped hose assemblies in house. All hose assemblies are made from our high quality red multi-purpose hose and brass fittings.

Please see the next page for a complete list of these items.



FILL SYSTEM FLEX HOSE

| Item # | Description |
|--------|---|
| 26430 | Black Fill System Flex Hose - 3 in x 25 ft |
| 26435 | Black Fill System Flex Hose - 3.5 in x 25 ft |
| 26440 | Black Fill System Flex Hose - 4 in x 25 ft |
| 26431 | Clear Urethane Fill System Flex Hose - 3 in x 25 ft |
| 26436 | Clear Urethane Fill System Flex Hose - 3.5 in x 25 ft |
| 26441 | Clear Urethane Fill System Flex Hose - 4 in x 25 ft |

**MADE IN
THE USA**



GAS HOSE ASSEMBLIES

**ALL GAS HOSE ASSEMBLIES ARE UL LISTED AND
CSA CERTIFIED**

| Item # | Description | Standard Roll Lengths |
|--------|---|-----------------------|
| 26122 | 1/2 in LP/NG Hose Assembly w/ 1/2 in SAE Swivel Female | 6 8 10 12 ft |
| 26142 | 1/4 in LP/NG Hose Assembly w/ 1/4 in MPT x 3/8 in SAE Swivel Female | 8 ft |
| 26382 | 3/8 in LP/NG Hose Assembly w/ 3/8 in SAE Swivel Female | 6 8 10 12 ft |



WATER HOSE ASSEMBLIES

- Made with our 300 PSI Air & Water Hose
- Multi-Purpose with Female Brass GHT ends

| Item # | Description |
|----------|----------------|
| 26381-04 | 3/8 in x 4 ft |
| 26381-08 | 3/8 in x 8 ft |
| 26381-09 | 3/8 in x 9 ft |
| 26381-10 | 3/8 in x 10 ft |
| 26381-11 | 3/8 in x 11 ft |
| 26381-12 | 3/8 in x 12 ft |
| 26121-03 | 1/2 in x 3 ft |
| 26121-04 | 1/2 in x 4 ft |
| 26121-08 | 1/2 in x 8 ft |
| 26121-09 | 1/2 in x 9 ft |
| 26121-10 | 1/2 in x 10 ft |
| 26121-11 | 1/2 in x 11 ft |
| 26121-12 | 1/2 in x 12 ft |
| 26581-03 | 5/8 in x 3 ft |
| 26581-04 | 5/8 in x 4 ft |
| 26581-08 | 5/8 in x 8 ft |
| 26581-09 | 5/8 in x 9 ft |
| 26581-10 | 5/8 in x 10 ft |
| 26581-11 | 5/8 in x 11 ft |
| 26581-12 | 5/8 in x 12 ft |
| 26341-03 | 3/4 in x 3 ft |
| 26341-04 | 3/4 in x 4 ft |
| 26341-08 | 3/4 in x 8 ft |
| 26341-09 | 3/4 in x 9 ft |
| 26341-10 | 3/4 in x 10 ft |
| 26341-11 | 3/4 in x 11 ft |
| 26341-12 | 3/4 in x 12 ft |



HOSE & FITTINGS



HOSE FITTINGS

- All fittings are brass
- Contact us for other fittings not listed below

| Item # | Description |
|----------|---------------------------------------|
| 26141-41 | 1/4 in Hose Barb x 3/8 in Swivel |
| 26141-51 | 1/4 in Hose Barb x 3/8 in MPT |
| 26141-54 | 1/4 in Hose Barb x 1/4 in MPT |
| 26381-40 | 3/8 in Hose Barb x 3/4 in FGHT Swivel |
| 26381-50 | 3/8 in Hose Barb x 3/4 in MGHT |
| 26381-51 | 1/2 in Hose Barb x 1/2 in MPT |
| 26121-40 | 1/2 in Hose Barb x 3/4 in FGHT Swivel |
| 26121-41 | 1/2 in Hose Barb x 1/2 in FPT Swivel |
| 26121-50 | 1/2 in Hose Barb x 3/4 in MGHT |
| 26121-51 | 1/2 in Hose Barb x 1/2 in MPT |
| 26581-40 | 5/8 in Hose Barb x 3/4 in FGHT Swivel |
| 26581-50 | 5/8 in Hose Barb x 3/4 in MGHT |
| 26341-40 | 3/4 in Hose Barb x 3/4 in FGHT Swivel |
| 26341-41 | 3/4" Hose Barb x 3/4" FPT Swivel |
| 26341-50 | 3/4 in Hose Barb x 3/4 in MGHT |
| 26341-55 | 3/4 in MGHT x 3/4 in MPT |

FOGGER NOZZLES



| Item # | Description |
|---------|------------------------------|
| A 26101 | 1 GPH Plastic Fogger Nozzle |
| B 26102 | 2 GPH Plastic Fogger Nozzle |
| C 26103 | 3 GPH Plastic Fogger Nozzles |



**PLEASE CONTACT
US FOR ANY HOSE
FITTINGS THAT MAY
NOT BE LISTED ON
THIS PAGE.**





WATER FILTER HOUSINGS



WATER FILTER HOUSINGS

| Item # | Description |
|---------|---|
| 52025 | Filter Housing Wrench - Heavy Duty Standard 2.5 in x 10 in Housing |
| 52045 | Jumbo Filter Housing Wrench - For Big Blue Jumbo 4.5 in Housing |
| 52011 | Bottom O-Ring Only for 2.5 in x 10 in Heavy Duty Clear/Black Housing |
| A 52012 | Top O-Ring Only for 2.5 in x 10 in Housing |
| B 52000 | Black Filter Housing Bracket-Fits 2.5 in x 10 in & 20 in Filter Housing <i>(Without Screws)</i> |
| 52001 | Blue/Black Filter Housing - 2.5 in x 10 in Heavy Duty with Pressure Release |
| 52002 | Clear/Black Filter Housing - 2.5 in x 10 in Heavy Duty with Pressure Release |
| 54000 | Black Filter Housing Bracket - Fits 4.5 in x 10 in & 20 in Filter Housing <i>(Without Screws)</i> |
| 54002 | Clear/Black Filter Housing - 4.5 in x 10 in Heavy Duty w/ Pressure Release |
| 54005 | Blue/Black Filter Housing - Fits 4.5 in x 20 in Heavy Duty w/ Pressure Release |
| 54012 | Top O-Ring Only for 4.5 in Filter Housing |



**PLEASE CONTACT
US FOR ANY WATER
FILTERS AND
HOUSINGS THAT
MAY NOT BE LISTED
ON THIS PAGE.**





**NEW
ITEM**



WATER FILTERS

| Item # | Description | Quantity |
|---------|--|----------|
| 52105 | 2.5 in x 10 in String Wound Sediment (5 Micron) | 50 |
| 52110 | 2.5 in x 10 in String Wound Sediment (10 Micron) | 50 |
| 52120 | 2.5 in x 10 in String Wound Sediment (20 Micron) | 50 |
| 52130 | 2.5 in x 10 in String Wound Sediment (30 Micron) | 50 |
| 52150 | 2.5 in x 10 in String Wound Sediment (50 Micron) | 50 |
| 52205 | 2.5 in x 10 in Poly Pleated Sediment Filter Cartridge (5 Micron) | 50 |
| 52210 | 2.5 in x 10 in Poly Pleated Sediment Filter Cartridge (10 Micron) | 50 |
| A 52220 | 2.5 in x 10 in Poly Pleated Sediment Filter Cartridge (20 Micron) | 50 |
| 52250 | 2.5 in x 10 in Poly Pleated Sediment Filter Cartridge (50 Micron) | 50 |
| 52620 | 2.5 in x 10 in Activated Carbon Water Filter Cartridge (20 Micron) | 25 |
| 54105 | 4.5 in x 10 in String Wound Sediment Filter (5 Micron) | 20 |

| Item # | Description | Quantity |
|---------|---|----------|
| 54110 | 4.5 in x 10 in String Wound Filter Cartridge (10 Micron) | 20 |
| 54120 | 4.5 in x 10 in String Wound Filter Cartridge (20 Micron) | 20 |
| 54150 | 4.5 in x 10 in String Wound Filter Cartridge (50 Micron) | 20 |
| 54320 | 4.5 in x 10 in Poly Pleated Sediment Filter Cartridge (5 Micron) | 20 |
| 54350 | 4.5 in x 10 in Poly Pleated Sediment Filter Cartridge (50 Micron) | 20 |
| B 54420 | 4.5 in x 20 in Poly Pleated Sediment Filter Cartridge (20 Micron) | 10 |
| 54201 | 4.5 in x 20 in Melt Blown Filter Cartridge (1 Micron) | 10 |
| 54205 | 4.5 in x 20 in Melt Blown Filter Cartridge (5 Micron) | 50 |
| 54520 | 4.5 in x 20 in String Wound Filter Cartridge (20 Micron) | 10 |





EYE BOLTS



EYE BOLTS

| Item # | Overall Length | Shank Length | Thread Length | Thread Diameter | Inside Eye Diameter |
|---------|----------------|--------------|---------------|-----------------|---------------------|
| A 15112 | 3 1/4 in | 3 1/4 in | 1 3/4 in | 5/16 in | 3/4 in |
| B 15106 | 2 in | 1 in | 3/4 in | 1/4 in - 20 | 9/16 in |
| C 15108 | 3 in | 1 3/4 in | 1 1/4 in | 1/4 in - 20 | 9/16 in |
| D 15117 | 4 in | 2 3/8 in | 2 1/8 in | 3/8 in - 16 | 13/16 in |
| E 15118 | 5 in | 3 1/2 in | 2 7/8 in | 3/8 in - 16 | 13/16 in |
| F 15119 | 6 in | 4 1/2 in | 2 7/8 in | 3/8 in - 16 | 13/16 in |



LAG EYE BOLTS

| Item # | Overall Length | Shank Length | Thread Length | Thread Diameter | Inside Eye Diameter | Pieces/Box |
|---------|----------------|--------------|---------------|-----------------|---------------------|------------|
| G 15204 | 2 3/16 in | 1 1/2 in | 15/16 in | 1/4 in | 19/64 in | 1000 |
| H 15150 | 3 in | 2 in | 1 1/4 in | 1/4 in | 9/16 in | 1000 |
| I 15153 | 3 1/4 in | 2 in | 1 1/4 in | 5/16 in | 5/8 in | 500 |
| J 15158 | 4 1/2 in | 3 1/16 in | 2 in | 3/8 in | 3/4 in | 300 |
| K 15011 | 6 in | 4 3/4 in | 1 5/8 in | 3/8 in | 5/8 in | 250 |





“S” HOOKS - HEAVY WIRE


- Our most popular and economical S-Hooks



| Item # | Overall Length | Wire Diameter | Eye Diameter | Gap | Pieces/Box |
|----------|----------------|---------------|--------------|------------------|------------|
| C *15515 | 1 1/2 in | .177 in | 7/16 in | 5/16 in | 2000 |
| D 15516 | 1 7/6 in | .192 in | 11/16 in | 5/16 in - 1/2 in | 2000 |
| E 15517 | 1 3/4 in | .192 in | 9/16 in | 3/8 in | 1500 |
| F *15525 | 2 1/4 in | .262 in | 11/16 in | 7/16 in | 1000 |

*Indicates our most popular sizes

“S” HOOKS - LIGHT WIRE

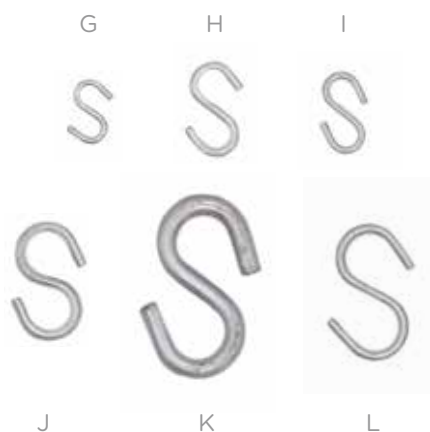

| Item # | Overall Length | Wire Diameter | Eye Diameter | Gap | Pieces/Box |
|----------|----------------|---------------|--------------|---------|------------|
| G 15855 | 3/4 in | .080 in | 3/16 in | 3/16 in | 1000 |
| H 15853 | 1 1/16 in | .092 in | 1/2 in | 1/4 in | 1000 |
| I *15510 | 1 in | .105 in | 7/32 in | 3/16 in | 1000 |
| J 15811 | 1 1/4 in | .120 in | 3/8 in | 5/16 in | 1000 |
| K 15816 | 1 5/8 in | .135 in | 1/2 in | 3/8 in | 2000 |
| L 15859 | 2 1/8 in | .148 in | 11/16 in | .675 in | 1000 |

*Indicates our most popular sizes

“S” HOOKS - STAINLESS STEEL



| Item # | Overall Length | Wire Diameter | Eye Diameter | Gap | Pieces/Box |
|------------|----------------|---------------|--------------|---------|------------|
| M 15510-SS | 1 in | .105 in | 7/32 in | 3/16 in | 1000 |
| N 15515-SS | 1 1/2 in | .177 in | 7/16 in | 5/16 in | 2000 |

NUTS




| Item # | Description | Standard Package |
|---------|---|------------------|
| O 20000 | Nuts - 1/4 in Zinc Plated | 100 |
| P 20001 | Nuts - 5/16 in Zinc Plated | 100 |
| Q 20002 | Nuts - 3/8 in Zinc Plated | 100 |
| R 20003 | Nuts - 3/8 in - 16 Nylon Insert Lock Nut Zinc Plated | 100 |
| S 20004 | Nuts - 5/16 in - 18 Nylon Insert Lock Nut Zinc Plated | 100 |



WASHERS & BOLTS

WASHERS

| Item # | Description | Standard Package |
|---------|---|------------------|
| A 20036 | Fender Washers - 3/16 in x 1 in Zinc Plated | 1000 |
| B 20037 | Washers - 5/16 in x 7/8 in Flat Zinc Plated | 1000 |
| C 20038 | Washers - 3/8 in x 1 in Flat Zinc Plated | 1000 |
| D 20039 | Fender Washers - 5/16 in x 1 1/2 in Zinc Plated | 1000 |
| E 20353 | Fender Washers - 1/2 in x 2 in | 100 |
| F 20380 | Lock washers - 3/8 in Split Zinc Plated | 100 |
| 20400 | 1/4 in Flat Washer | 100 |

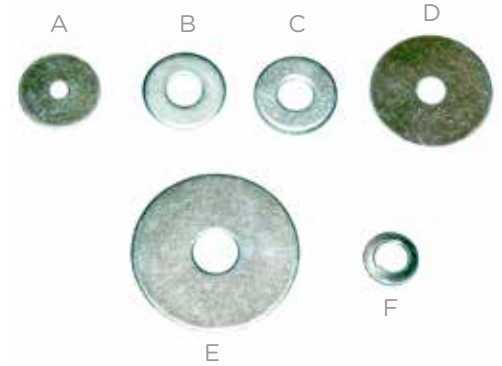

BOLTS

| Item # | Description | Standard Package |
|---------|---|------------------|
| G 20100 | Bolts - 5/16 in-18 x 1 in Zinc Plated | 100 |
| H 20101 | Bolts - 3/8 in-16 x 1 in Zinc Plated | 100 |
| I 20150 | Bolts - 3/8 in-16 x 1 1/2 in Zinc Plated | 100 |
| J 20300 | Bolts - 5/16 in-18 x 3 in Zinc Plated | 100 |
| K 20251 | Hex Hd Machine Bolts - 3/8 in-16 x 2 1/2 in Zinc Plated | 100 |
| L 20301 | Hex Hd Machine Bolts - 3/8 in-16 x 3 in Zinc Plated | 100 |



CARRIAGE BOLTS

| Item # | Description | Standard Package |
|---------|--|------------------|
| 20214 | Carriage Bolt - 1/4-20 x 2 3/4" Zinc Plated | 100 |
| M 20320 | Carriage Bolts - 3/8 in - 16 x 2 in Zinc Plated | 100 |
| N 20321 | Carriage Bolts - 3/8 in - 16 x 2 1/2 in Zinc Plated | 100 |
| O 20250 | Carriage Bolts - 5/16 in - 18 x 2 1/2 in Zinc Plated | 100 |
| P 20330 | Carriage Bolts - 3/8 in - 16 x 3 in Zinc Plated | 100 |
| Q 20331 | Carriage Bolts - 2/8 in - 16 x 3 1/2 in Zinc Plated | 100 |




WEDGE ANCHOR BOLTS

| Item # | Description | Standard Package |
|---------|--------------------------------------|------------------|
| R 20350 | Wedge Anchor Bolt - 1/2 in x 3.75 in | 75 |
| S 20352 | Wedge Anchor Bolt - 1/2 in x 5.5 in | 75 |



CUP HOOK DRIVERS

| Item # | Description |
|---------|------------------|
| N 15001 | Short 6 in model |
| O 15002 | Long 24 in model |



- For driving **#15014 & #15038** screw hooks with drill



LAG BOLTS

| Item # | Description | Standard Package |
|---------|---|------------------|
| 20015 | Lag Bolts - 1/4 in x 1 1/2 in Hot Dip Galvanized | 100 |
| 20019 | Lag Bolts - 1/4 in x 2 in Zinc Plated | 1000 |
| J 20020 | Lag Bolts - 3/8 in x 2 in Zinc Plated | 700 |
| 20021 | Lag Bolts - 5/16 in x 2 in Zinc Plated | 1000 |
| K 20030 | Lag Bolts - 3/8 in x 3 in Zinc Plated | 500 |
| 20031 | Lag Bolts - 5/16 in x 3 in Zinc Plated | 700 |
| 20033 | Lag Bolts - 5/16 in x 3 1/2 in Hot Dip Galvanized | 500 |
| 20034 | Lag Bolts - 5/16 in x 3 1/2 in Zinc Plated | 600 |
| L 20035 | Lag Bolts - 3/8 in x 3 1/2 in Zinc Plated | 400 |
| M 20040 | Lag Bolts - 3/8 in x 4 in Zinc Plated | 400 |
| 20041 | Lag Bolts - 5/16 in x 4 in Zinc Plated | 600 |
| 20042 | Lag Bolts - 1/4 in x 4 1/2 in Zinc Plated | 800 |
| 20050 | Lag Bolt - 3/8 in x 5 in Hot Dip Galvanized | 250 |
| 20060 | Lag Bolts - 3/8 in x 6 in Zinc Plated | 250 |
| 20025 | Lag Bolt - 3/8 in x 2.5 in | 700 |
| 20045 | Lag Bolt - 5/16 in x 4.5 in Hot Dip Galvanized | 425 |

CERAMIC COATED LAG SCREWS



SCREW HOOKS

| Item # | Description | Standard Package |
|----------|-------------------------------------|------------------|
| 15020 | Ceiling Hook | 500 |
| 15808 | .159 in x 2 9/16 in | 1000 |
| 15013 | 3/16 in x 2 1/2 in | 1500 |
| 15014 | .225 in x 3 1/2 in | 1000 |
| 15014-CC | .225 in (1/4 in) X 3 Ceramic Coated | 1000 |
| A 15015 | .225 in x 3 1/2 Stainless Steel | 1000 |
| B 15038 | .268 in x 3 1/2 in | 500 |
| 15038-CC | .268 in x 3 1/2 in Ceramic Coated | 500 |
| 15038-SS | .268 in x 3 1/2 in Stainless Steel | 500 |
| C 15039 | 3/8 in x 4 in | 500 |
| D 15050 | .268 in 5 in | 500 |
| E 15802 | .272 in x 4 7/16 in Wide Mouth | 500 |
| F 15205 | Rope and Pulley Hook | 100 |
| 15805 | Bike Hook | 100 |



SCREWS

| Item # | Description | Standard Package |
|----------|--|------------------|
| G 20010 | Self Tapping Screw - #10 x 1 in with Neoprene Washer | 3000 |
| H 20011 | Twin Drive Screw #10 x 1 in | 2500 |
| I 20012 | Drywall Screw - Size 8 x 2 in | 3500 |
| J 20013 | #9 x 1.5 in Wood Screw w/ Washer | 2500 |
| K 20335 | Ceramic Coated Construction Lag - 5/16" X 3.5" (T40) | 700 |
| L 20440 | Ceramic Coated Construction Lag - 3/8" X 4" (T40) | 450 |
| M 20220 | Ceramic Coated Construction Lag - 1/4" X 2" (T30) | 1800 |
| N 201031 | Ceramic Coated Construction Lag - #10 X 3 1/8" (T25) | 2200 |



SUPPLEMENTAL FEEDING

TURBOMATES

The TurboMate is the first supplemental chick feeding pan to attach directly to the feed line. Designed for chicks to have easy access to clean feed for their first 14 days to promote better feed conversions, greater live weight gain, and better gut health.

The TurboMate replaces both the paper/plastic trays and the chick feeder downspouts and reduces your set up time between flocks. (Available in short or long models to accommodate different OEM feed pans)

Benefits:

- Improved Feed Conversion
- Greater live weight gain
- Improved uniformity
- Reduced labor cost

| Item # | Description |
|--------|----------------------------|
| 35594 | TurboMate 1 Short (25/box) |
| 35595 | TurboMate 1 Long (22/box) |
| 35597 | TurboMate 2 Short (22/box) |
| 35598 | TurboMate 2 Long (22/box) |

TURBOGROWS



#35592

TURBOGROW 2 PLUS



#35715 & #35716

**TURBO TRIGGER
FEED DISPENSER**

Short & Long Versions Available



#35725 & #35726

SWING MATE

Short & Long Versions Available




#35700

TURBO TWIST



#35701

TURBO TWIST TOOL



#35597 & #35598


TURBOMATE 2

The TurboMate 2 has all the benefits of the original TurboMate, but with a few added features:


- Free-spins up and locks into place with the a locking pin
- Windows on the front and back of the feeder for easier cleaning and visualization of feed levels.

Short & Long Versions Available

| Item # | Description |
|-------------|---|
| 35590 | TurboGrow Feeder (Round) |
| 35591 | TurboGrow Feeder Shallow |
| 35592 | TurboGrow 2 Plus (Oval) |
| 35593 | TurboGrow 2S |
| 35592-Twist | TurboGrow 2 Plus Oval + TurboTwist (36/box) |

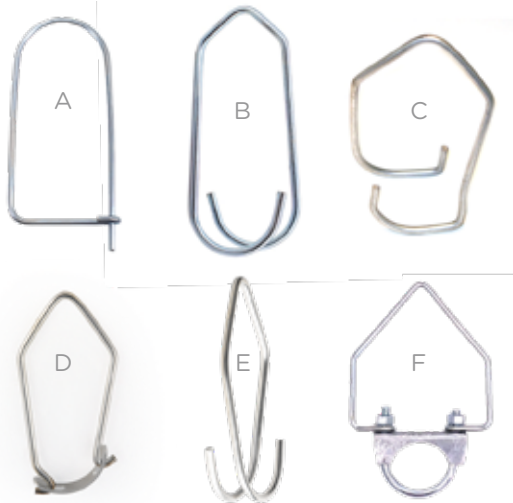

| Item # | Description | Standard Package |
|---------|--|------------------|
| A 19570 | Fill Pipe to Flex Pipe Coupler | 150 |
| B 19521 | Wire Form Pipe Hanger for Turkeys | 200 |
| C 19530 | Cumberland Style Feeder Hanger | 300 |
| D 19510 | Chore-Time Style Feeder Hanger | 300 |
| E 19520 | Big Dutchman Style Wire Form Feeder Hanger | 300 |
| F 19560 | Feeder Hanger Pipe Clamp | 150 |

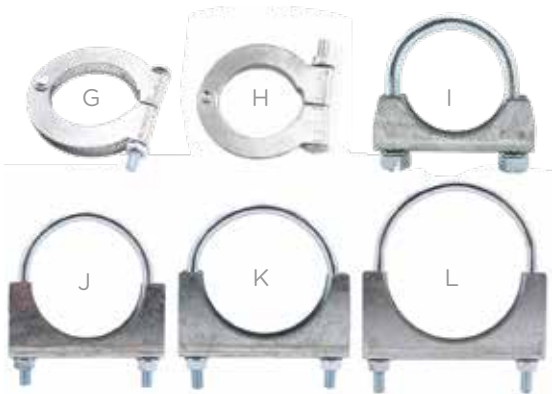

| Item # | Description | Standard Package |
|---------|--------------------------|------------------|
| G 19501 | Turkey Feeder Pipe Clamp | 200 |
| H 19500 | Feeder Tube Clamp | 300 |
| I 19502 | Feed Tube Clamp - 1.75" | 300 |
| J 19504 | Feed Tube Clamp - 3.25" | 80 |
| K 19505 | Feed Tube Clamp - 3.5" | 60 |
| L 19506 | Feed Tube Clamp - 4" | 50 |



ADJUSTABLE ROOSTER FEEDER HANGER

- Programmable feeder hanger is made of galvanized steel
- It has 9 different holes which a s-hook (15515) can be placed to adjust for tilt in feed lines and lock them into place.
- This hanger has to be installed prior to shocker wire
- Sold in full box quantities of 150/box



AMT EASY ADJUSTABLE FEEDER HANGER

- Programmable feeder hanger is made of a composite fiberglass material
- It has 9 different holes which a s-hook (15515) can be placed to adjust for tilt in feed lines and lock them into place.
- Includes a cut out that slides over shocker wire so it can be installed without removing shocker wire
- Sold in Full box quantities of 250/box



BROILER INSULATOR BRACKET

#17230



TURKEY INSULATOR BRACKET

#17235



MIGRATION FENCING


VFENCE™

VFence™ is designed specifically for the unique needs of the poultry production industry.

It improves airflow and circulation for better temperature control and efficiency resulting in lower utility bills and more consistent product.

The gate inserts prevent birds from getting inside the fencing where the fence has been cut.


| Item # | Description |
|--------|---------------------------------|
| 17320 | V-Fence 12 in x 12 ft |
| 17326 | V-Fence 12 in x 6 ft |
| 17329 | Gate Insert for V-Fence - 12 in |

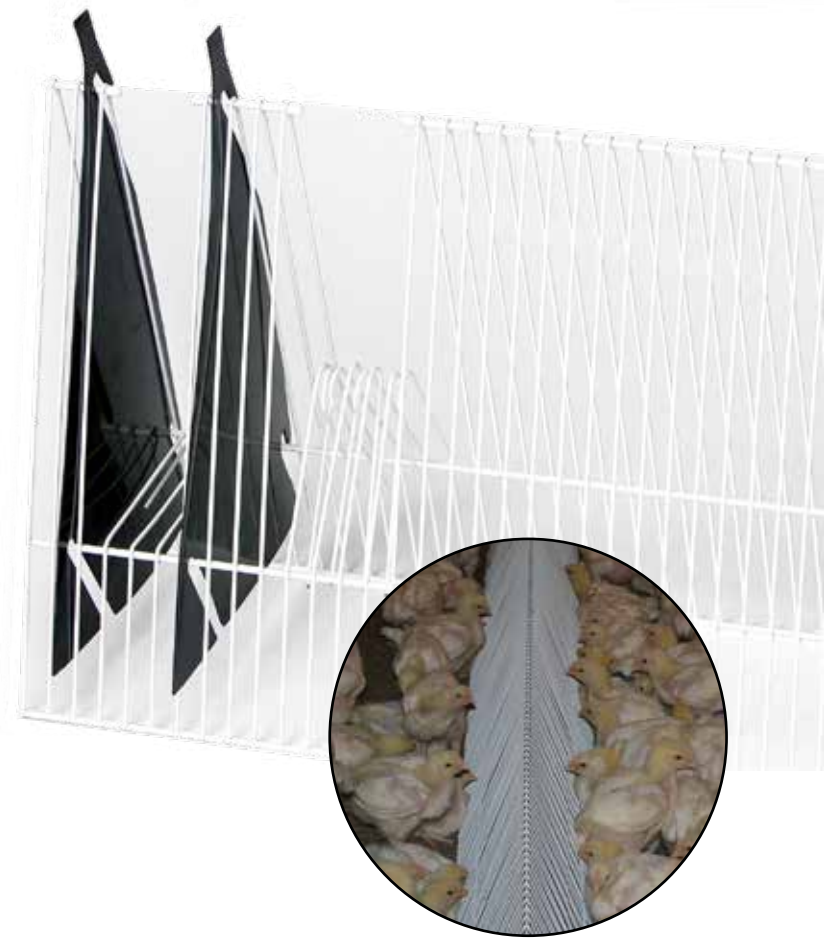

#17310

MIGRATION FENCE

- 16 in x 12 in
- Use with #17300 Stand
- 1/2 in wire spacing

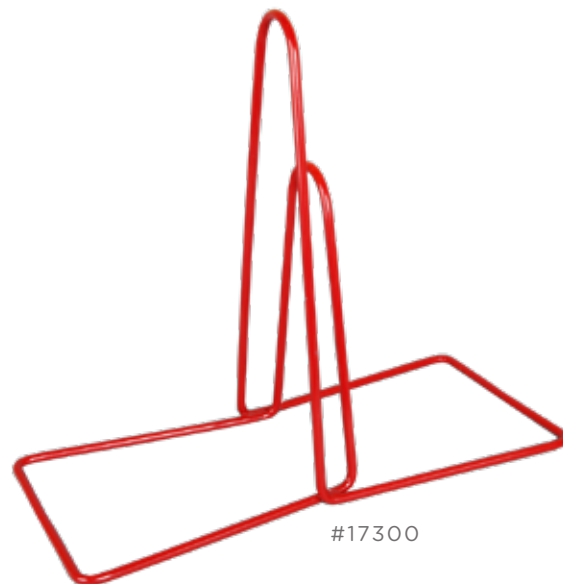

#17300


MIGRATION FENCE STAND

- Powder coated steel
- Use with item #17310 Migration Fence
- Compatible with other manufacturers fence
- 1 7/8 in slot spacing



CABLE CUTTERS

| Item # | Description |
|---------|--|
| A 23000 | Cable Cutter - Felco C-7 (Swiss Made) |
| B 23002 | Cable Cutter - Economy |
| C 23003 | Cable Cutter - Felco C-9 Extra Heavy Duty (Swiss Made) |
| D 23005 | Cable Cutter - Nicopress Professional |
| E 23006 | Cable Cutter |

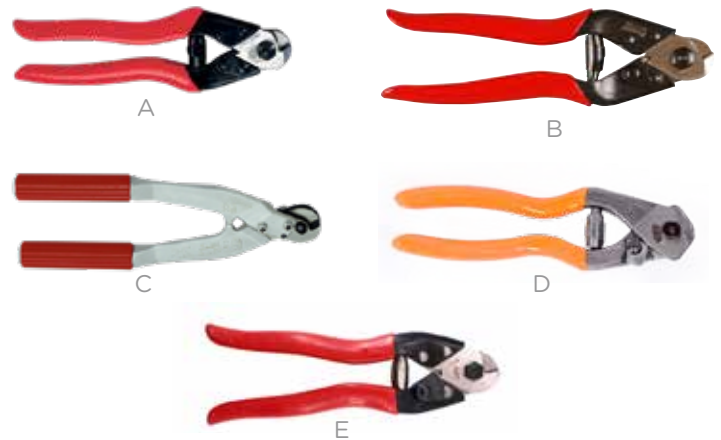

CRIMPING TOOLS

| Item # | Description |
|---------|-------------------------------|
| F 16001 | Sta-Kon Crimping Tool |
| G 16002 | Economy Sta-kon Crimping Tool |



SWAGGING TOOLS

| Item # | Description |
|---------|--|
| H 14000 | Nicopress Tool - 3 Cavity Commercial Grade |
| I 14001 | 5 Cavity Light Duty Swaging/Crimping Tools |
| J 14002 | Nicopress Tool - 1/8 in Single Cavity Commercial Grade |
| K 14003 | Nicopress Tool - 3/16 in Single Cavity Commercial Grade |
| L 14004 | 14.4 V Battery Operated Swaging Tool - 3 Cavity 3/32 in, 1/8 in, 3/16 in |
| M 14005 | Swaging/Crimping Tool - 3 Cavity 3/32 in, 1/8 in, 3/16 in (US Made) |
| N 14007 | Economy Swaging Tool - 5 Cavity |





PERSONAL PROTECTIVE EQUIPMENT

PERSONAL PROTECTIVE EQUIPMENT



BOOT COVERS

#70001

- 25 pairs in a bag
- Fits up to size 12
- Clear 3 mil polyethylene



N95 FACE MASK WITH RESPIRATOR

#70005-20PK

- 20 masks in a box
- 4 Ply



DISPOSABLE COVERALL WITH HOOD

#70011-50PK & #70013-50PK

- 50 coveralls in a box
- Available in sizes XL & 3XL
- 50 gsm PP non-woven



AMT TOUGH TONG

- All metal construction
- Available 30 in and 37 in models

| Item # | Description | Standard Package |
|---------|------------------------|------------------|
| D 27300 | AMT Tough Tong - 37 in | 1 |
| 27320 | AMT Tough Tong - 30 in | 1 |



THE PICKER & ACCESSORIES

| Item # | Description | Standard Package |
|---------|-----------------------------------|------------------|
| C 27200 | The Picker | 12 |
| 27201 | Picker Tips | 2 |
| 27202 | Replacement Hand Lever for picker | 1 |
| 27203 | Replacement Spring for Picker | 1 |
| 27204 | Replacement Jaw for Picker | 1 |




FEED CART

- 300 lb capacity
- Durable powder coated metal construction
- Wide 4 in x 16 in balloon tires roll easily on litter
- Tub Dimensions: 37 in x 24 in x 11 in
- 32 in overall width
- Weight: 60lbs
- Easy assembly

CATCHING HOOKS

- For culling sick birds and checking weights and conformity
- Zinc plated

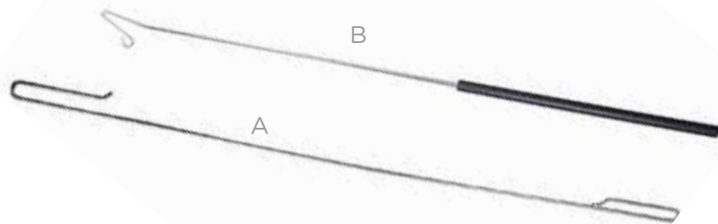

| Item # | Description |
|---------|---|
| A 27100 | Catching Hook - 53 in long - Made of 1/4 in wire |
| B 27101 | Catching Hook - 45 1/2 in long - Made of 3/16 in wire - comfort grip plastic handle |



EGG BELT

XF966 THE BEST EGG BELT ON THE MARKET

It is difficult to argue with over 40 years of success. From the first belts we made in 1975, our XF966 Egg Belt has earned the right to be called the best egg belt on the market. Our belt is so unique that the trademark is registered. Many of the first belts installed have outlasted the original equipment. Through the years, we have maintained high quality standards in the XF966 belt and have made improvements as we learned new techniques. During those years, we have seen many egg belt manufacturers come and go.

We now have three times more experience with egg belt than

our oldest competitor. XF966 egg collector belt is made of the finest synthetic fiber, specially treated and woven for durability. Our special yarn treatment makes the difference. XF966 can stand up better than other belts to common problems of rodents and everyday snags and cuts. We maintain the largest inventory of egg belt in the world, plus we can ship our stock rolls the same day if ordered by 12:00 PM Eastern time. The durability of our product can turn into dollars for you.



XF966
AMT Egg Belt



B

A

C

Our 8-in and 3 3/4-in XF966 Belts are your BEST CHOICE for Breeder Nest Systems



FEATURES

- UV treated to prolong belt life
- Anti-static treated to repel dust particles and prevent static electricity buildup
- Pre-stretched with heat and tension to reduce stretch in the hen house
- Polyethylene fill yarn is more resistant to ammonia and methane gases than the standard polypropylene yarn used by other manufacturers

Check our website for the latest installation instructions

| Item # | | Description | Standard Roll Lengths |
|--------|-------|-------------|-----------------------------|
| A | 62030 | 3 in | 1040 ft |
| B | 62037 | 3 3/4 in | 840 1040 1240 1500 ft |
| | 62038 | 3 3/4 in | 840 1040 1240 ft |
| | 62040 | 4 in | 840 1040 1240 ft |
| C | 62050 | 5 in | 500 1200 ft |
| | 62060 | 6 in | 925 1020 ft |
| | 62080 | 8 in | 820 1020 1220 ft |
| | 62141 | 14 in | 500 ft |


WE ARE THE LARGEST DISTRIBUTOR OF EGG BELTS IN NORTH AMERICA

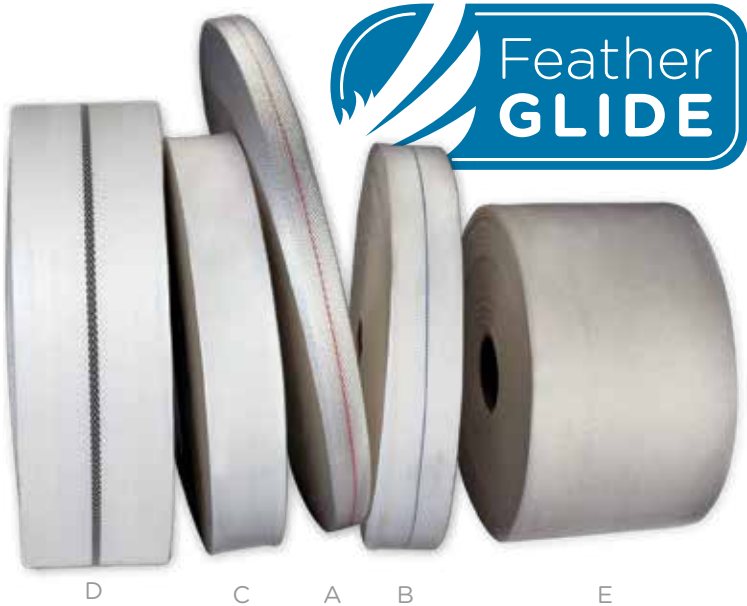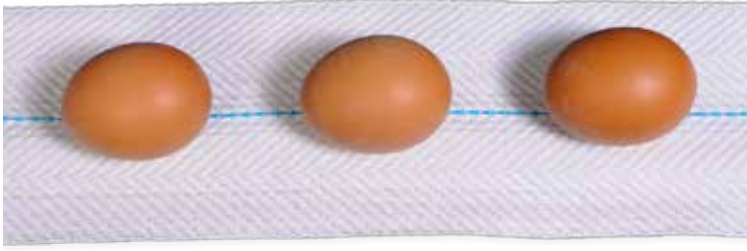

FEATHERGLIDE EGG BELT

- Bigger selection of roll sizes
- Used as original equipment by many manufacturers
- Herringbone weave keeps eggs in place
- Economical alternative to our XF966
- Superior to egg belt offered by other manufacturers
- 8-in and 12-in are made with 25% heavier yarn

| Item # | Description | Standard Roll Lengths |
|---------|-------------|------------------------------------|
| A 63020 | 2 in | 1120 1270 ft |
| 63035 | 3 1/2 in | 840 1040 1240 ft |
| B 63037 | 3 3/4 in | 850 1050 1150 1250 1500 ft |
| C 63040 | 4 in | 850 1050 1250 ft |
| 63045 | 4 1/2 in | 1050 ft |
| 63050 | 5 in | 1020 1220 ft |
| D 63080 | 8 in | 820 1020 1220 ft |
| 63120 | 12 in | 500 600 ft |
| E 63140 | 14 in | 500 600 ft |

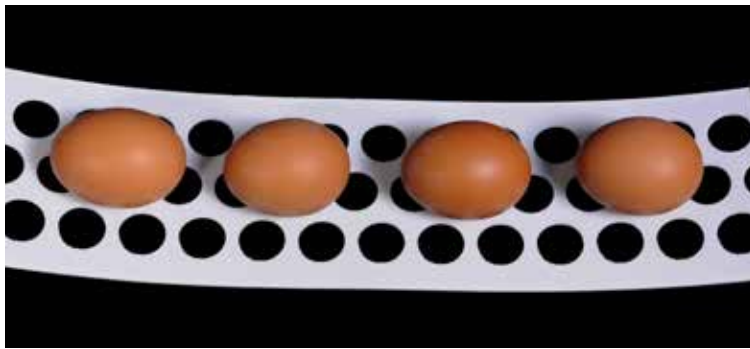


PERFORATED POLYPROPYLENE BELT

- Extruded co-polymer polypropylene
- Holes maintain position of eggs on belt and allow dirt to fall through
- Produces cleaner eggs with less cracks
- Available in 820 ft, 1020 ft & 1220 ft rolls
- Flame retardant material available


Direct replacement for systems designed for perforated polypropylene belts. Not recommended for systems designed for woven belts.

| Item # | Description | Standard Roll Lengths |
|------------------|-------------------|-----------------------|
| 61037 | 3 3/4 in / 1.8 mm | 820 1020 1220 ft |
| 61040 | 4 in / 1.6 mm | 820 1020 1220 ft |
| 61050 | 5 in / 1.5 mm | 820 1020 1220 ft |
| 61080 | 8 in / 1.5 mm | 820 1020 1220 ft |
| 61082 | 8 in / 1.3 mm | 820 ft |
| 61100 | 9.84 in / 1.5 mm | 820 1020 1220 ft |
| 61195 | 19.5 in / 1.7 mm | 750 1020 ft |
| 61200 | 19.68 in / 1.7 mm | 1020 ft |
| 61041-Reinforced | 4 in | 1020 1220 ft |

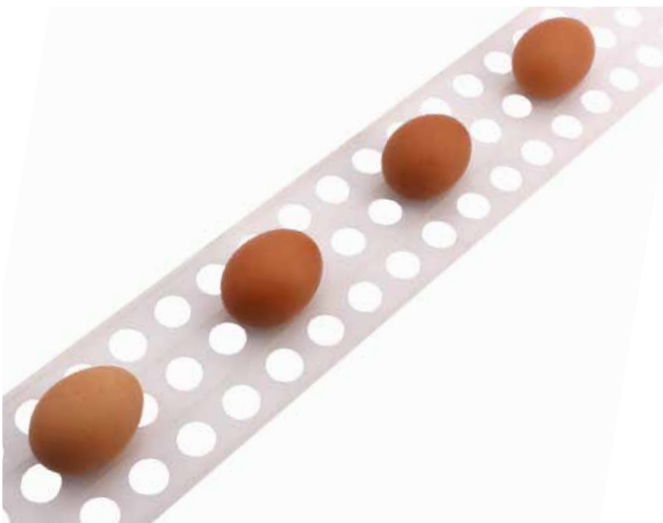




EGG BELT

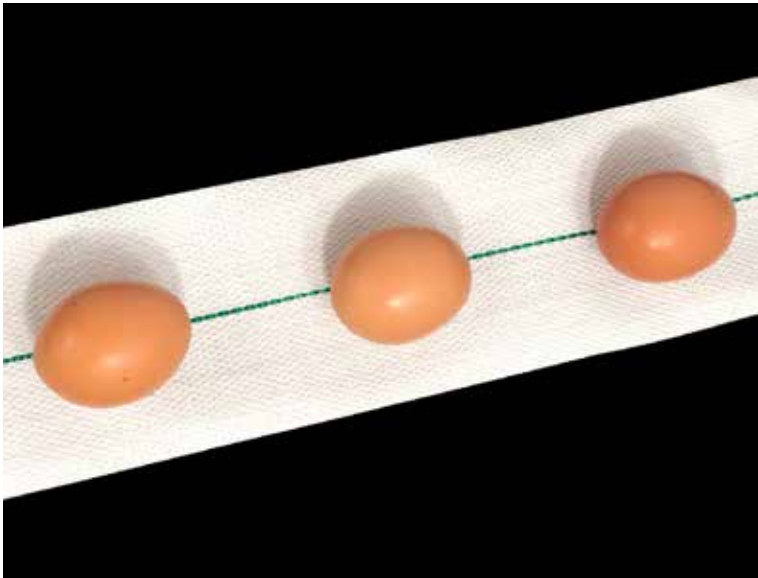

ECONOGLIDE EGG BELT

- The most economical belt on the market
- This belt was developed due to customers' request for a less expensive belt intended for breeder houses that change belts after every flock. Users should not expect the same long-term durability of our FeatherGlide or XF966 belts
- Plain Weave egg belt provides maximum support that is also snag resistant
- The weft is polyethylene and warp is polypropylene
- Uses a smaller diameter yarn which decreases stretch

| Item # | Description | Standard Roll Lengths |
|--------|-------------|-----------------------|
| 63708 | 3 3/4 in | 850 ft |
| 63710 | 3 3/4 in | 1050 ft |
| 63712 | 3 3/4 in | 1250 ft |
| 60040 | 4 in | 1250 ft |

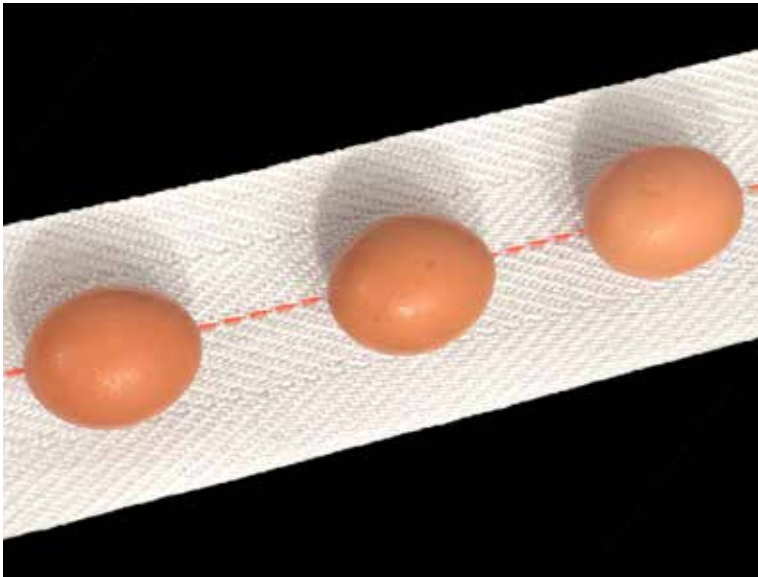

FIRE RETARDANT EGG BELT

- 100% Polypropylene Woven Egg Belt with Fire Retardant Additive
- UV Stabilizer
- Anti-Static additives
- Flame Retardant

| Item # | Description | Standard Roll Lengths |
|-------------|-------------|-----------------------|
| 63612 | 3 1/2 in | 1250 ft |
| 63810 | 3 3/4 in | 1050 ft |
| 63812 | 3 3/4 in | 1250 ft |
| 61100-610FR | 9.84 in | 610 ft |





MYLAR EGG BELT

- Designed for Diamond, Farmer Automatic Salmet and others
- 10-mil standard thickness
- No stretch
- Completely washable
- Excellent choice where sanitation is a major consideration
- 1040 ft/roll

| | Item # | Description |
|---|--------|--|
| A | 64035 | 3 7/8 in - Creased (for Farmer Automatic & Salmet) |
| B | 64037 | 3 7/8 in - Regular (for Diamond) |




MYLAR SPLICING SUPPLIES

| | Item # | Description | Standard Package |
|--|--------|-----------------------------------|------------------|
| | 64036 | Splicing Tape - 3 in x 55 yd roll | 8 |
| | 64039 | Hole Punch | 1 |

EGG FINGER BELT & ACCESSORIES

We have carefully designed and maintained the quality of our egg finger belts. Other companies have tried to imitate our specially formulated synthetic rubber “fingers”, but they do not hold up as well to wear and tear and rodent attack.

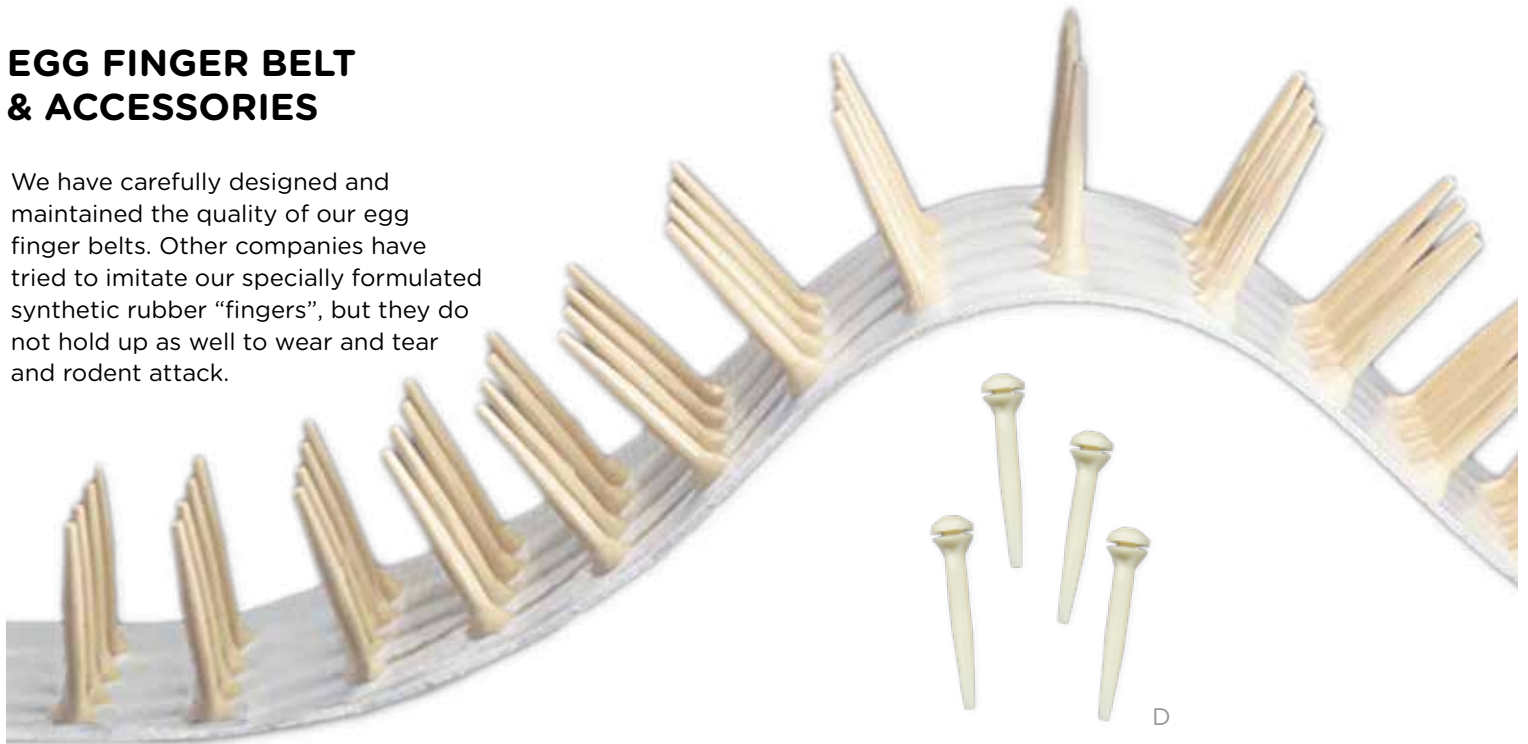

| | Item # | Description | Standard Package |
|---|--------|---------------------------------------|------------------|
| | 87020 | Finger Belt - Punched without Fingers | Up to 100 ft |
| D | 87100 | Egg Fingers - Bulk | 100 and 1000 |

*All finger belts are made to order.
Please allow 4 weeks lead-time.*



SPLICING SUPPLIES

PORTABLE SEWING MACHINE

- For splicing any woven egg belt up to 8 in wide
- Faster and more durable than hand-stitched or glued splices

#66010



SPLICING SUPPLIES

| Item # | Description | Standard Package |
|--------|--|------------------|
| 61000 | Splicing Stapler | 1 |
| 61010 | Staples | 5000 |
| 66010 | Portable Sewing Machine | 1 |
| 66011 | Lubricating Oil for #66010 | 1 |
| 66500 | Sewing Thread - 1 lb spool (for sewing by hand) | 1 Roll |
| 66501 | Waxed Sewing Thread - 27 yd roll (sewing by hand) | 1 Roll |
| 66502 | Sewing Thread - 1/2 lb cone (sewing machine) | 1 Roll |
| 66600 | Bent Sack Needles (sewing by hand) | 12 |
| 66610 | Needles for Sewing Machine | Box of 25 |

ALLIGATOR LACING

| Item # | Description | Standard Package |
|--------|-------------|------------------|
| 66901 | #7 x 18 in | Box of 10 |
| 66912 | #7 x 12 in | Box of 4 |
| 66913 | 12 in | Box of 4 |
| 66916 | #7 x 16 in | Box of 4 |
| 66918 | #7 x 18 in | Box of 4 |



#61012

SPLICING STRAPPING



#66300

HOT- MELT GLUE



#66400

METAL HOLD DOWN CLIPS



#66401

PLASTIC HOLD DOWN CLIP



ULTRASONIC BELT WELDER

- Durable - for harsh and demanding environments
- Easy to use
- Lightweight and ergonomic - weighs 6 lbs
- Less than half the weight of other systems
- Portable
- Protected - contained in military grade pelican case
- Warranty - one year parts & labor
- Crushproof Case - internal shock absorption prevents premature component wear and keeps electronics safe from accidental drops
- Corrosive airborne particulates cannot enter system
- Properly controlled welds take less than five seconds
- Recognizes Errors Automatically - takes action to prevent damage

| Item # | Description |
|--------|--|
| 66101 | Power Supply for Ultrasonic Belt Welder |
| 66102 | Handgun for Ultrasonic Belt Welder |
| 66103 | Woven Belt Tip for Ultrasonic Welder |
| 66105 | Manure and Perforated Egg Belt Tip for Ultrasonic Welder (1.3 mm - 1.4 mm thickness) |
| 66107 | Spot Welding Tip for P100R (1.0mm - 1.4mm) |
| 66110 | Travel Case for Ultrasonic Welder Items |
| 66120 | P100R Ultrasonic Welding System |
| 66201 | 500 Watt Egg & Manure Belt Welding System with Hand Held Welding Unit |
| 66203 | Woven Belt Welding Tip for 500 Watt Unit (1.0mm - 1.4mm) |
| 66204 | Manure Belt Welding Tip for 500 Watt Unit (1.0mm - 1.4mm) |
| 66205 | Perforated Belt Welding Tip for 500 Watt Unit (1.3mm - 1.7mm) |



MANURE BELT

- Strong and Durable
- More uniform
- Made in Europe
- 40-mil Co-polymer Polypropylene
- Superior impact resistance
- Other width and lengths available by special order
- Quantity discount for orders over 8 rolls
- Flame retardant material available

| Item # | Description | Standard Roll Length |
|--------------|--|----------------------|
| 61325 | 32 1/2 in (<i>Meller</i>) | 650 ft 900 ft |
| 61342 | 34 1/4 in (<i>BEC Cage Master</i>) | 900 ft |
| 61355 | 35 1/2 in (<i>Big Dutchman</i>) | 1040 ft |
| 61370 | 37 in (<i>Facco</i>) | 900 ft |
| 61386 | 38 5/8 in (<i>Farmer Automatic and Salmat</i>) | 820 ft 900 ft |
| 61401 | 40 1/8 in (<i>Vali</i>) | 1040 ft |
| 61410 | 41 in | 1040 ft |
| 61423 | 42 3/16 in (<i>Chore-Time</i>) | 1040 ft |
| 61455 | 45 5/16 in (<i>Salmat</i>) | 1040 ft |
| 61465 | 46 1/2 in | 1040 ft |
| 61470 | 47 in (<i>Alternative Design</i>) | 1040 ft |
| 61480 | 48 in (<i>Big Dutchman and Favorite</i>) | 1040 ft |
| 61513 | 51.18 in | 1040 ft |
| 61535 | 53 1/2 in | 1040 ft |
| 61850 | 85 in | 1040 ft |
| 60999-1200mm | Manure Drying System Belt | 1040 ft |



MANURE CURTAIN


- Replacement for original manure shields
- Made of reinforced polyethylene film
- Hemmed on one side for support rod
- Smooth surface to prevent build-up
- Can be cut to 8' or 10' lengths for a nominal fee
- Made to order

| Item # | Description |
|--------|-------------|
| 60015 | 15 in |
| 60018 | 18 in |
| 60021 | 21 in |
| 60024 | 24 in |
| 60028 | 28 in |





CURTAIN DIAGRAM

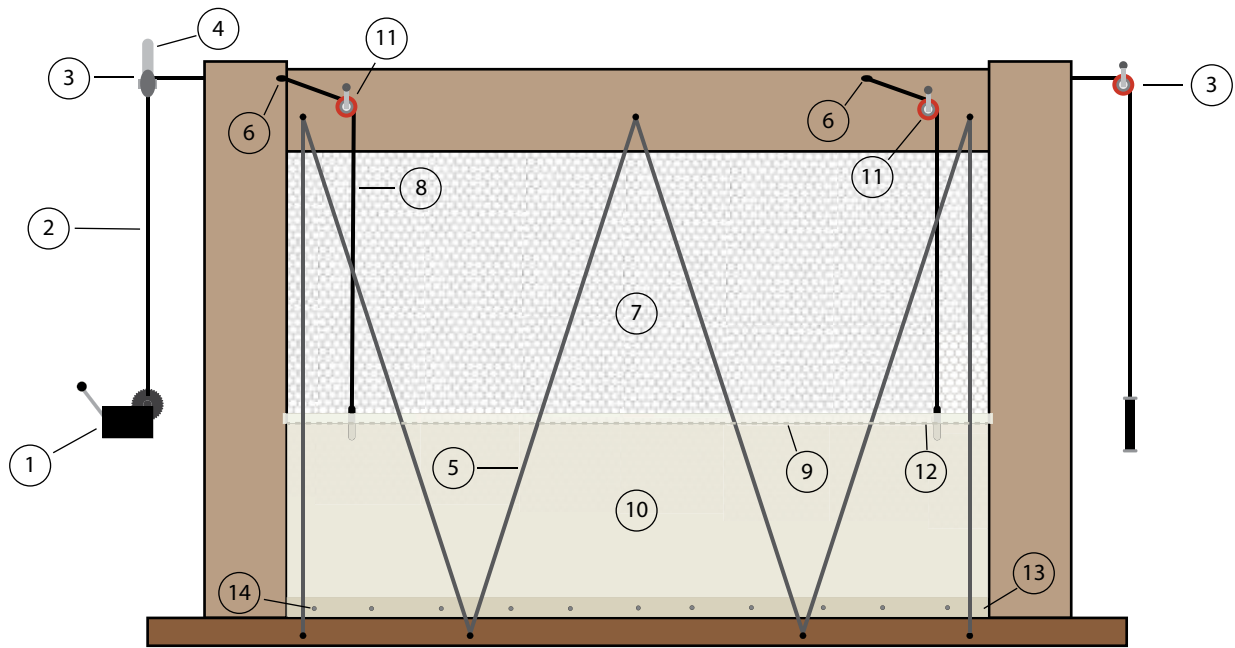

Winch and Accessories



1 1200 lb Winch - Item #24011 (one per curtain mounted on winch bracket #17000 with bolts #20150 and lag bolts #20030).

Cable



2 1/8" Cable - Item #23181, 23182, or 23185 (length of curtain plus 30')

Pulleys



3 3 1/2" Pulley - Item #18351 or 18352 (one per curtain)
11 3/4" Curtain Pulley- Item #18075 (one every 6') or Turtle Rope Fairlead Item #19400 (installed with screw #20013).

Screw Hooks



4 1/4" Screw Hook - Item #15014 (one for each pulley)

Cord and Rope



5 3/16" Diamond Braid Rope for wind lacing - Item #12062 (installed with fence staples on 12' centers top and bottom item #25030)




8 1/8" Polyester Cord - Item #12041 (one drop every 6')
9 Attach cord to curtain by punching hole in curtain under the conduit and tying 1/8" cord to curtain and conduit.

Sta-Kons



6 1/8" Sta-Kons - Item #16181 or 16182 (one per 6' of curtain installed with crimping tool #16001)

Bird Wire



7 PVC Coated Wire (i.e. Item # 29006 - depending on size of opening)

Curtain



10 Curtain (curtain is measured before hemming add 12" to width of opening)

Conduit



12 1/2" X 10' Swaged Conduit - Item #22000 (divide curtain length by 9.75')

Curtain End Pockets

13 Curtain End Pockets 3' wide curtain pockets (two per curtain)

Nails and Staples



14 Curtain Nails - Item #25010 (one nail per linear foot of curtain)



Immediate Turnaround!

AMT POLY-PLUS CLEAR CURTAIN 5.3 OZ

| Item # | Description | Roll Lengths |
|----------------|-----------------------------|--------------|
| 1001581-600-SH | 15 in AMT Clear - 5.3 oz SH | 600 ft |
| 1001881-600-SH | 18 in AMT Clear - 5.3 oz SH | 600 ft |
| 1001481-600-DH | 4 ft AMT Clear - 5.3 oz DH | 600 ft |
| 100481-600-SH | 4 ft AMT Clear - 5.3 oz SH | 600 ft |
| 100581-600-DH | 5 ft AMT Clear - 5.3 oz DH | 600 ft |
| 100581-600-SH | 5 ft AMT Clear - 5.3 oz SH | 600 ft |
| 100681-600-DH | 6 ft AMT Clear - 5.3 oz DH | 600 ft |
| 100681-600-SH | 6 ft AMT Clear - 5.3 oz SH | 600 ft |
| 100781-600-DH | 7 ft AMT Clear - 5.3 oz DH | 600 ft |
| 100781-600-SH | 7 ft AMT Clear - 5.3 oz SH | 600 ft |
| 101281-300-SH | 12 ft AMT Clear - 5.3 oz SH | 300 ft |

SH=Single Hem DH = Double Hem

AMT POLY-PLUS CURTAIN MATERIAL

- Most Advanced Curtain Construction
- Longer Life
- Maximum Ultraviolet Protection
- Most popular type of curtain used in the USA
- One piece construction up to 12 feet wide
- Available in clear, black, blue, black/white and black/silver
- A 2 1/2 in single hem opening is standard on all curtains. second hems or extra wide hems are optional.
- Poly-Plus curtain is measured before hemming. Deduct 3 in for single hem and 6 in for double hem.
- Example: A 6 ft curtain actually measures 69 in with a single hem or 66 in with a double hem.
- Standard rolls are 600 ft (standard rolls of 12 ft are 300 ft).
- Custom roll lengths of 200 ft or more are available at no extra charge (custom length rolls cannot be returned).
- Minimum curtain order is 100 ft unless otherwise indicated.

IN STOCK OPTIONS

AMT POLY-PLUS CLEAR CURTAIN 7.5 OZ

| Item # | Description | Roll Lengths |
|--------------|---------------------------------------|--------------|
| 10059-600-SH | 5 ft AMT Heavy-Duty Clear - 7.5 oz SH | 600 ft |
| 10069-600-SH | 6 ft AMT Heavy Duty Clear - 7.5 oz SH | 600 ft |
| 10079-600-SH | 7 ft AMT Heavy-Duty Clear - 7.5 oz SH | 600 ft |
| 10089-600-SH | 8 ft AMT Heavy-Duty Clear - 7.5 oz SH | 600 ft |

AMT POLY-PLUS BLACK/WHITE CURTAIN 6.1 OZ

| Item # | Description | Roll Lengths |
|---------------|-----------------------------------|--------------|
| 100184-600-SH | 18 in AMT Black/White - 6.1 oz SH | 600 ft |
| 10054-600-SH | 5 ft AMT Black/White - 6.1 oz SH | 600 ft |
| 10064-600-SH | 6 ft AMT Black/White - 6.1 oz SH | 600 ft |
| 10074-600-SH | 7 ft AMT Black/White - 6.1 oz SH | 600 ft |
| 10084-600-SH | 8 ft AMT Black/White - 6.1 oz SH | 600 ft |
| 10094-600-SH | 9 ft AMT Black/White - 6.1 oz SH | 600 ft |

AMT POLY-PLUS CLEAR CURTAIN 4 OZ

- 4 oz/square yard
- 10 x 10 weave
- Maximum light penetration
- Greenhouse effect makes buildings warmer

| Item # | Description | Item # | Description |
|--------|-------------|--------|--------------|
| 10008 | 8 in Clear | 10071 | 7 ft Clear |
| 10011 | 12 in Clear | 10081 | 8 ft Clear |
| 100151 | 15 in Clear | 10091 | 9 ft Clear |
| 100181 | 18 in Clear | 10101 | 10 ft Clear |
| 10021 | 2 ft Clear | 10121 | 12 ft Clear |
| 10031 | 3 ft Clear | 10131 | 13 ft Clear |
| 10041 | 4 ft Clear | 10141 | 14 ft Clear* |
| 10051 | 5 ft Clear | 10151 | 15 ft Clear* |
| 10061 | 6 ft Clear | | |

*2 Piece Construction



CURTAIN MATERIAL



**OUR MOST
POPULAR
CURTAIN!**

AMT POLY-PLUS CLEAR CURTAIN 5.3 OZ

- Economical yet very reliable
- 5.3 oz/square yard
- 12 x 12 Weave
- 12 mil thickness

| Item # | Description |
|---------|-------------|
| 1001181 | 12 in Clear |
| 1001581 | 15 in Clear |
| 1001881 | 18 in Clear |
| 100281 | 2 ft Clear |
| 100381 | 3 ft Clear |
| 100481 | 4 ft Clear |
| 100581 | 5 ft Clear |
| 100681 | 6 ft Clear |

| Item # | Description |
|--------|--------------|
| 100781 | 7 ft Clear |
| 100881 | 8 ft Clear |
| 100981 | 9 ft Clear |
| 101081 | 10 ft Clear |
| 101281 | 12 ft Clear |
| 101381 | 13 ft Clear |
| 101481 | 14 ft Clear* |
| 101581 | 15 ft Clear* |

**2 Piece Construction*

AMT POLY-PLUS CLEAR CURTAIN 7.5 OZ

- 7.5 oz/square yard
- 12 x 12 weave
- A heavier version of our most popular curtain

| Item # | Description |
|--------|------------------------|
| 10029 | 2 ft Heavy-Duty Clear |
| 10039 | 3 ft Heavy-Duty Clear |
| 10049 | 4 ft Heavy-Duty Clear |
| 10059 | 5 ft Heavy-Duty Clear |
| 10069 | 6 ft Heavy-Duty Clear |
| 10079 | 7 ft Heavy-Duty Clear |
| 10089 | 8 ft Heavy-Duty Clear |
| 10099 | 9 ft Heavy-Duty Clear |
| 10109 | 10 ft Heavy-Duty Clear |
| 10119 | 12 ft Heavy Duty Clear |

AMT POLY-PLUS CLEAR CURTAIN 10 OZ

- 10 oz/square yard
- 16 x 16 weave
- Mullen Burst: 510 PSI
- 22 mil thickness

| Item # | Description |
|--------|---------------------|
| 10040 | 4 ft Clear - 10 oz |
| 10050 | 5 ft Clear 10 oz |
| 10060 | 6 ft Clear - 10 oz |
| 10070 | 7 ft Clear - 10 oz |
| 10080 | 8 ft Clear - 10 oz |
| 10090 | 9 ft Clear - 10 oz |
| 10100 | 10 ft Clear - 10 oz |
| 10120 | 12 ft Clear - 10 oz |



*Recommended for
broiler houses where
brown-out and tunnel
ventilation are used*

AMT POLY-PLUS BLACK/ WHITE CURTAIN 6.1 OZ


- 6.1 oz/square yard
- 10 x 10 weave
- 7.5 mil thickness

Also available in Black, Black/Silver, Black/White Double Layer and Blue 5.3 oz curtain.


Due to the manufacturing process, we cannot warrant against pinhole spots in single layer black fabrics. Black, Black/Silver and Black/White can be fabricated as **double layer curtains for guarantee total blackout.**

| Item # | Description |
|--------|-------------------|
| 10014 | 12 in Black/White |
| 100154 | 15 in Black/White |
| 100184 | 18 in Black/White |
| 10024 | 2 ft Black/White |
| 10034 | 3 ft Black/White |
| 10044 | 4 ft Black/White |
| 10054 | 5 ft Black/White |
| 10064 | 6 ft Black/White |
| 10074 | 7 ft Black/White |
| 10084 | 8 ft Black/White |
| 10094 | 9 ft Black/White |
| 10104 | 10 ft Black/White |
| 10124 | 12 ft Black/White |

Check out our website for additional options.

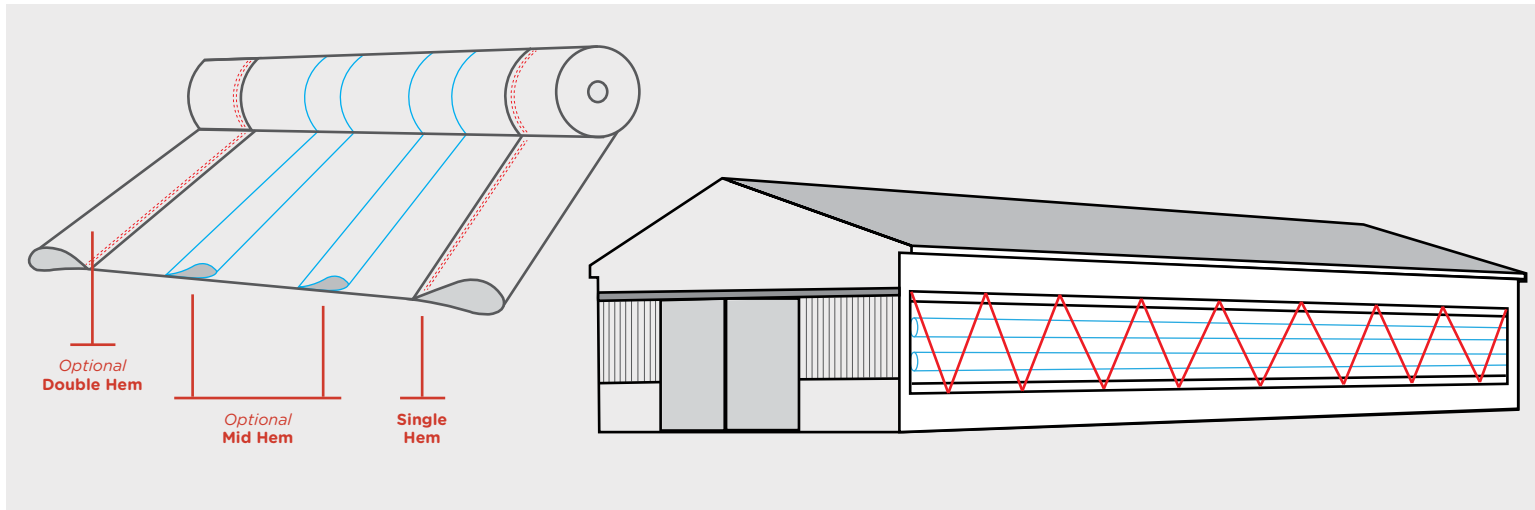

| Item # | Description |
|--------|-------------------------------|
| 10313 | 3 ft AMT Clear Vinyl - 16 oz |
| 10314 | 4 ft AMT Clear Vinyl - 16 oz |
| 10315 | 5 ft AMT Clear Vinyl - 16 oz |
| 10316 | 6 ft AMT Clear Vinyl - 16 oz |
| 10317 | 7 ft AMT Clear Vinyl - 16 oz |
| 10318 | 8 ft AMT Clear Vinyl - 16 oz |
| 10319 | 9 ft AMT Clear Vinyl - 16 oz |
| 10310 | 10 ft AMT Clear Vinyl - 16 oz |
| 10312 | 12 ft AMT Clear Vinyl - 16 oz |

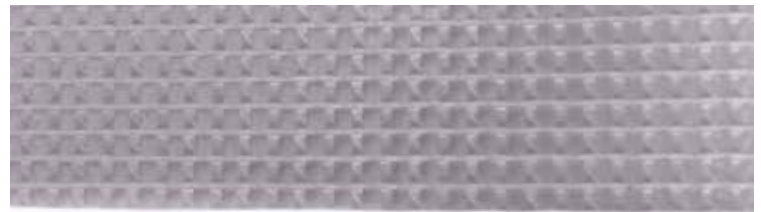

AMT 16 OZ CLEAR VINYL

- One of the heaviest curtains on the market
- Greater flexibility and abrasion resistance than heavy poly curtains
- Super clear coating allows the most light transmission of any heavy weight curtain
- Width over 6 ft require 2 pieces construction

AMT ZIPPER CURTAIN

- For Partial House Brooding, Tunnel Inlet Covers, End Door Covers and Fan Covers
- Made with our 4.5 oz clear or 6.1 oz black curtain
- 2 zippers for easy installation and removal
- Can be fabricated to any size
- Extra zippers can be added
- Standard curtains are 12 feet high

| Item # | Description |
|----------|--------------------|
| 10127-40 | 40 ft Clear Zipper |
| 10127-42 | 42 ft Clear Zipper |
| 10127-44 | 44 ft Clear Zipper |
| 10127-46 | 46 ft Clear Zipper |
| 10127-48 | 48 ft Clear Zipper |
| 10127-50 | 50 ft Clear Zipper |
| 10127-52 | 52 ft Clear Zipper |
| 10127-57 | 57 ft Clear Zipper |
| 10127-62 | 62 ft Clear Zipper |
| 10127-68 | 68 ft Clear Zipper |

| Item # | Description |
|----------|--------------------|
| 10131-40 | 40 ft Black Zipper |
| 10131-42 | 42 ft Black Zipper |
| 10131-44 | 44 ft Black Zipper |
| 10131-46 | 46 ft Black Zipper |
| 10131-48 | 48 ft Black Zipper |
| 10131-50 | 50 ft Black Zipper |
| 10131-52 | 52 ft Black Zipper |

ZIPPER CURTAINS CAN BE MADE CUSTOM LENGTHS. PLEASE CONTACT US FOR OPTIONS AND PRICING.



CURTAIN MATERIAL

AMT 7-LAYER INSULATED CURTAIN

- Our Standard 7-Layer Insulated Curtain includes one outer layer of AMT White Poly-Plus, four inner layers of non-woven insulating material, one inner layer of AMT Clear Poly-Plus vapor barrier and one outer layer of AMT Clear Poly-Plus Curtain
- Our new Black/White 7-layer insulated Curtain includes one outer layer of AMT White Poly-Plus, four inner layers of non-woven insulating material, one inner layer of AMT Clear Poly-Plus vapor barrier and one outer layer of AMT Black Poly-Plus Curtain
- Estimated R value of 3
- Insulated curtains are full width - No deduction for hems
- Reduces light transmission by 93%
- Approximately 25 oz/square yard
- Standard rolls are 200 ft
- Custom roll lengths are available

| Item # | Description |
|--------|--------------------------------|
| 10037 | 3 ft AMT 7-Layer Insulated |
| 10047 | 4 ft AMT 7-Layer Insulated |
| 10057 | 5 ft AMT 7-Layer Insulated |
| 10067 | 6 ft AMT 7-Layer Insulated |
| 10077 | 7 ft AMT 7-Layer Insulated |
| 10087 | 8 ft AMT 7-Layer Insulated |
| 100374 | 3 ft AMT B/W 7-Layer Insulated |
| 100474 | 4 ft AMT B/W 7-Layer Insulated |
| 100574 | 5 ft AMT B/W 7-Layer Insulated |
| 100674 | 6 ft AMT B/W 7-Layer Insulated |
| 100774 | 7 ft AMT B/W 7-Layer Insulated |
| 100874 | 8 ft AMT B/W 7-Layer Insulated |

| Item # | Description |
|----------|--------------------|
| 10131-40 | 40 ft Black Zipper |
| 10131-42 | 42 ft Black Zipper |
| 10131-44 | 44 ft Black Zipper |
| 10131-46 | 46 ft Black Zipper |
| 10131-48 | 48 ft Black Zipper |
| 10131-50 | 50 ft Black Zipper |
| 10131-52 | 52 ft Black Zipper |



BUBBLE INSULATED CURTAIN

- Made with outer layer of 6.1 oz black/white, middle layer of bubble insulation and inner layer of 6.1 oz black curtain
- Estimated R Value of 4 for 3-Layer



SHADE CLOTH

- Black, woven polypropylene material ideal for controlling sunlight to provide optimum growing conditions
- Made to order
- Standard spacing on grommets is 2 ft

Shade Percentages Available:

20%, 30%, 40%, 47%, 51%, 63%, 73%, 80%, & 95%



WE CAN FABRICATE CURTAINS FOR THE FOLLOWING APPLICATIONS:

Double Layer Curtains | Insulated Inlet Curtains | Tunnel Inlet Curtains | Zipper Curtain Dividers | End Door Curtains | Fan Shutter Covers | Baffle Curtains | Simple Brood Curtains | Shade Cloth



#25040

J NAILS

- 1 3/4 in
- 50 lb box
- Zinc Plated



#25010

METAL CAP CURTAIN NAILS

- Ring shank
- 1 1/2 in long
- 50 lbs/box
- Sold by the box only



#25020

CURTAIN NAILS

- Plastic cap will not rust or cut the curtain
- New and improved with stronger nail and extra UV protection
- 1 1/4 in long
- 2000/box



#25030

FENCE STAPLES

- Ribbed shank
- For attaching zig zag cord over curtains
- For hanging curtain pulleys
- 1 1/2 in long
- Sold by the pound



#22030

LEXAN CURTAIN CLIPS

- For connecting cord to curtain and conduit
- 500/box

#11001



VAPOR BARRIER PATCH TAPE

- 4 in x 165 ft
- For repairs to vapor barrier
- Also good for curtain repair




- For temporary repairs to poly type curtains

| Item # | Description | Roll Lengths |
|---------|--|--------------|
| E 10002 | Curtain Repair Tape - Clear 3 in | 60 ft |
| F 10003 | Curtain Repair Tape - Black/White 3 in | 60 ft |
| G 10004 | Curtain Repair Tape - Black 4 in | 60 ft |
| H 10005 | Curtain Repair Tape - Blue 4 in | 60 ft |
| I 10006 | Curtain Repair Tape - White 4 in | 60 ft |
| J 10001 | Vinyl Curtain Repair Glue | - |



CURTAIN ACCESSORIES

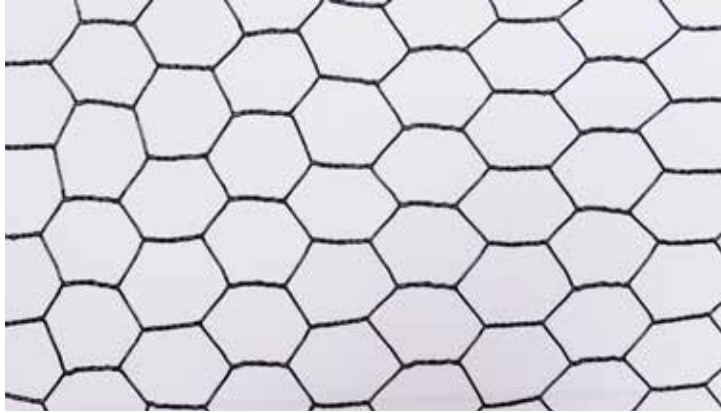

PVC COATED HEX WIRE

- 20 gauge wire, Galvanized before coating, 1 in wire mesh

| Item # | Description | Roll Lengths |
|--------|-------------|--------------|
| 29001 | 1 ft | 150 ft |
| 29018 | 18 in | 150 ft |
| 29002 | 2 ft | 150 ft |
| 29003 | 3 ft | 150 ft |
| 29004 | 4 ft | 150 ft |
| 29005 | 5 ft | 150 ft |
| 29006 | 6 ft | 150 ft |
| 29007 | 7 ft | 150 ft |



STRAPPING

- Curtain strapping

| Item # | Description | Roll Lengths |
|---------|--|--------------|
| A 13001 | Black Polypropylene Tape 1.75 in x 300 ft | 24 Roll |
| B 62030 | Black Polypropylene Webbing 3 in x 1040 ft | 1 Roll |



#29206

6 FT WELDED WIRE

- 1 in x 2 in x 100 ft HDG
- 14 Gauge



PRO-TECH CONTROLLERS AND SENSORS



CURTAIN MINDER

- Reed Switch Mode and Basic Mode
- 120/240 Volts AC
- Digital Display with English/Spanish
- Adjustable Delay 10 seconds to 15 minutes
- Controls up to 4 winches
- Monitors Low and No AC Power
- Alarm Minder Output
- Temp Minder Power Supply
- Reliable, Easy to Install and Set up

Each kit contains CM 6000, WK1510 and B1250



#13105

VOLTAGE MINDER



#13108

TEMP MINDER

CONDUIT

- For curtain rods and water support
- Swaged end for easy assembly

| Item # | Description | Roll Lengths |
|---------|---|--------------|
| C 22000 | .706 in (1/2 in) x 10 ft 3 in Swaged Conduit | 250 |
| D 22001 | 1.05 in x 10 ft 3 in Swaged Conduit (Ziggity) | 270 |
| 22002 | .922 in x 10 ft Swaged Conduit | 357 |
| 22003 | 1.163 in x 10 ft 3 in Swaged Conduit (Val) | 246 |





AMT WINCHING GUIDELINES

Broiler Feeders:

- 1 AMT 5000 lb winch on a feed line of 500 ft or less.
- 2 AMT 5000 lb winches on feed line longer than 500 ft.
- Allow 4 full wraps of the strap on winch drum prior to lifting weight of feeders.
- **Never pull directly against bolt holding strap to winch drum.**
- When using a double-back use AMT Prime Cable - 3/16 in 7 x 19.
- The AMT 5000 lb winch is designed to pull 2 lines in opposite directions simultaneously. **Never pull in just one direction with winch.**

Turkey Feeders:

- **Never use straps on turkey feeders.**
- 1 AMT 5000 lb winch on a feed line of 500 ft or less.
- 2 AMT 5000 lb winches on feed line longer than 500 ft.
- **Always use a double-back winching system on turkey feeders.**
- When using a double-back use AMT Prime Cable - 3/16 in 7 x 19.
- Use AMT Prime Cable - 1/4 in 7 x 19 when not using double-back.
- The AMT 5000 lb winch is designed to pull 2 lines in opposite directions simultaneously. **Never pull in just one direction with winch.**

Breeder Nest

- **Never use straps on breeder nest systems.**
- 2 AMT 5000 lb winches on each line

of nest 400 ft in length.

- 3 AMT 5000 lb winches on each line of nest 500 ft in length.
- 4 AMT 5000 lb winches on each line of nest 600 ft in length.
- **Always use double-back winching system on nests.**
- When using a double-back use AMT Prime Cable - 3/16 in 7 x 19.
- Use AMT Prime Cable - 1/4 in 7 x 19 when not using double-back.
- The AMT 5000 lb winch is designed to pull 2 lines in opposite directions simultaneously. **Never pull in just one direction with winch.**

Pullet Chain Feeders

- **Never use straps on Chain Feeders.**
- 1 AMT 5000 lb winch of chain feed lines less than 500 ft.
- 2 AMT 5000 lb winches on chain feed lines 500 ft or longer.
- **Always use double-back winching system on chain feed lines.**
- When using a double-back use AMT Prime Cable - 3/16 in 7 x 19.
- Use AMT Prime Cable - 1/4 in 7 x 19 when not using double-back.
- The AMT 5000 lb winch is designed to pull 2 lines in opposite directions simultaneously. **Never pull in just one direction with winch.**

General Guidelines

- If using straps, make sure they are aligned with the winch drum. They will be damaged if rubbing on either side of the drum.

- In most cases, cable is the limiting factor in these guidelines. While the winch has a capacity of 5000 lbs, 3/16 in 7 x 7 cable has a break strength of 3700 lbs. Cable manufacturers recommend suspending no more than 50% of the rated break strength as a working load. This is 1850 lbs for 3/16 cable.
- The maximum pulling capacity of all AMT Winches is based on the first layer of cable on drum.
- The maximum pulling capacity of Dutton Lainson Winches is based on the third layer of cable on drum.
- The maximum pulling capacity is reduced by 10% each layer of cable put on the drum.
- The maximum pulling capacity is reduced by 50% on a straight pull with the drum at full capacity of cable.
- We recommend at least 3 full turns of cable on drum before lifting load.
- We recommend using a double back when load exceeds 50% of maximum pulling capacity.
- We don't recommend using straps when weight exceeds 50% of maximum pulling capacity of the winch.
- The safe working load of a winch is 50% of maximum pulling capacity of a winch with the drum at full capacity of cable.
- **We do not recommend operating a winch at more than 50% of the maximum pulling capacity.**

CONTACT US FOR
CUSTOM WHOLE-HOUSE
WINCHING QUOTES FOR
NEW CONSTRUCTION
OR RETROFITS

**1-800-344-2358 OR
SALES@AMT-USA.COM**





GENERAL WARRANTY POLICY

AMT warrants its products and parts against defects in materials and workmanship for 1 year from the original ship date. During this period, AMT will, at its option, (a) repair or replace such product, or (b) refund to the original purchaser the original purchase price, in lieu of such repair or replacement. **Labor costs associated with the replacement or repair of the product are not covered by AMT.** This Warranty applies only to the Original Purchaser of the product. Additional extended warranties for the equipment and/or systems listed below are provided to the original purchaser as follows (for all other AMT products purchased, the 1 year warranty period shall apply):

Curtain Material:

3 years prorated (100% first 12 months, 2.77% for each month remaining after 12 months). For example: A 20-month-old curtain would be credited for 44.32% of the original price (16 months left on warranty x 2.77%/month)

WindLift 5000 lb. Overhead Winch #24049 & 24050:

5 years prorated (100% first 12 months, 1.67% for each month remaining after 12 months).

Dutton-Lainson Winches:

5 years prorated

Electric Motors:

2 years

Egg Belt:

1 year from date of purchase against defects in material and workmanship. The belt is not warranted against premature wear caused by over tightening, rodent damage, worn nests trough or excessive egg load. The belt should be tightened by hand only. The use of drive system to tighten belt will void warranty. Wash belts with cold water only. The use of disinfectants will void warranty.

Perforated Egg Belt:

Only to be used in systems designed for perforated polypropylene belts. Not recommended for systems designed for woven belts.

Spare Parts:

30 days for all spare/replacement parts

Prime Cable:

5 years prorated against rust for Prime Cable Only. (100% first 12 months, 1.67% for each month remaining after 12 months). All other galvanized and stainless steel cable carries our standard 12-month warranty. Cable is not guaranteed against breakage.

Cable Free Systems:

5 years prorated on rods and cord provided all parts (winches, pulleys, fittings, rod, straps, cord and adjusters) are purchased from AMT and installed per their instructions.

CONDITIONS AND LIMITATIONS

1. The product must be installed by and operated in accordance with the instructions published by the Manufacturer or Warranty will be void.
2. Warranty is void if all components of the system are not original equipment supplied by AMT.
3. This product must be purchased from and installed by an AMT APPROVED authorized distributor or certified representative thereof or the Warranty will be void.
4. Malfunctions or failure resulting from misuse, abuse, negligence, alteration, accident, or lack of proper maintenance shall not be considered defects under the Warranty.
5. This Warranty applies only to systems for the care of poultry and livestock. Other applications in industry or commerce are not covered by this Warranty.
6. AMT shall not be liable for any consequential or special damages related to these products including, but not limited to, loss of time or use, costs of transportation, lost sales, lost orders, lost income, increased overhead, labor and incidental costs and operational inefficiencies, inconvenience or animal/poultry performance.

Failure to install the equipment according to product manuals or perform routine maintenance according to product manuals voids all warranties.

THIS WARRANTY CONSTITUTES THE MANUFACTURER'S ENTIRE AND SOLE WARRANTY AND THIS MANUFACTURER DISCLAIMS ANY AND ALL OTHER WARRANTIES, INCLUDING, BUT NOT LIMITED TO, EXPRESS AND IMPLIED WARRANTIES AS TO MERCHANTABILITY, FITNESS FOR PARTICULAR PURPOSES SOLD AND DESCRIPTION OR QUALITY OF THE PRODUCT FURNISHED HEREUNDER.

AMT Distributors are not authorized to modify or extend the terms and conditions of this Warranty in any manner or to offer or grant any other warranties for AMT products in addition to those terms expressly stated above.

