







2024 Product Catalog

Agricultural Mfg. & Textiles, Inc. 1451 Stagecoach Road, Laurens, SC 29360 USA

Call Toll Free: (800) 344-2358 (USA, Canada & Mexico) International Phone: (864) 682-3445 Email: sales@amt-usa.com



Founded in 1975 by Charles, "Chicken Little" Little. Agricultural Mfg. & Textiles, Inc. began to redefine the poultry industry by concentrating on 3 basic core values:

Egg Belt, Curtain Material, Cord, Rope and Curtain Strapping continue to be the foundation of our business. We combine those with a complete line of winching materials and other Accessories for poultry, swine and dairy buildings, as well as a constant sourcing for items from around the world to stock our shelves with the best quality products at competitive prices. With over 100,000 sq. ft. of warehouse space, we possess the largest in stock selection of winches & egg belts in North America.

Our Story

- Providing the poultry industry with the absolute best quality products
- Maintaining honest and competitive pricing for our customers
- Being a proven & trusted partner to our clients with quick, efficient service

For more than 4 decades, AMT has continued to innovate within the poultry industry. We provide Best In Class products with the largest in-stock selection, experienced installation and technical advice, and an unwavering commitment to customer satisfaction driven by our heritage.

Get to know AMT and discover the AMT Advantage.



Largest in-stock selection in North America

Our Story 3	Washers & Bolts 44
New Products 6	Screws, Screw Hooks, & Bolts 45
Winching 13	Supplemental Feeding 46
Ceiling Winches 13	Feeder Hangers & Pipe Clamps 47
Electric Winches 15	Migration Fence 48
Hand Winches 17	Tools
Winching Systems 20	Personal Protective Equipment 50
Winching Accessories 24	Poultry Feed &
Cable	Handling Equipment 51
Suspension Rod & Wire 26	Egg Belt 52
Cord, Rope & Cable Fittings27	XF966 Belt 52
Motors & Power Transmission 30	Featherglide Belt 53
Motors 30	Perforated Belt 53
Pulley Sheaves 30	Econoglide Belt 54
Power Cords 31	Fire Retardant Belt 54
V-Belts 31	Mylar Belt 55
Chain & Sprockets 33	Egg Finger Belt 55
Pulleys	Splicing Supplies 56
Plumbing Supplies 36	Manure Belt & Curtain 57
Hose & Fittings 36	Curtain Diagram 58
PVC Fittings	Curtain Material 59
Water Filters 40	Curtain Accessories 63
Hardware 42	Controllers & Sensors 65
Eye Bolts 42	AMT Winching Guidelines
S-Hooks & Hex Nuts 43	Warranty Information 67

TABLE OF CONTENTS

5







AMT Prime Auger Motors

Item #	Description
30050	1/2 HP Auger Motor
30075	3/4 HP Auger Motor
30100	1 HP Auger Motor
30150	1.5 HP Auger Motor



#48011

Flange Bearing



AMT Prime Fan Motors

Item # Description 32050 1/2 HP Fan Motor 32100 1 HP Fan Motor 32150 1.5 HP Fan Motor

#48020

Automatic Belt Tensioner



AMT Prime Farm Duty Motors

Item #	Description
34050	1/2 HP Farm Duty Motor
34075	3/4 HP Farm Duty Motor
34100	1 HP Farm Duty Motor



#28023

Power Cords



INTERMATIC TIMERS

Item #	Description		
132T2926A	2T2926A - Case-Outdoor, Type 3R Plastic, Gray with See-Through Window		A421
13CT2000	CT2000 Timer (30 sec, 60 sec, 180 sec, 5 min, 10 min, cycle timer)		
13ET1705C	ET1705C - 7-Day 1-Circuit Electronic Control, 120-277 VAC, SPST, Indoor Metal Enclosure		
13ET2105CP	ET2105CP 24-Hour/365 Day 1-Circuit Electronic Control, 120-277 VAC, SPST, Indoor/ Outdoor Plastic Enclosure	E	#13402 #13CT2000 #13ET2105CP
13ET2125CP	ET2125CP 24-Hour/365 Day 2-Circuit Electronic Control, 120-277 VAC, 2-SPST/DPST, Indoor/Outdoor Plastic Enclosure		BY JOHNSON CONTROLS
13T101	T101 - 24-Hour Mechanical Time Switch, 120 VAC, 60Hz, SPST, Indoor Metal Enclosure, 1 Hour Interval	13401	Description A421ABC-02C Single Stage Electronic Temperature Control w/ A99BB-200C
13T102	T102 - 24-Hour Mechanical Time Switch, 208- 277 VAC, 60Hz, SPST, Indoor Metal Enclosure, 1 Hour Interval	13402	A421ABC-03C Single Stage Electronic Temperature Control w/ A99BB-300C
13T103	T103 - 24-Hour Mechanical Time Switch, 120 VAC, 60Hz, DPST, Indoor Metal Enclosure, 1 Hour Interval	13406	A421AEC-01C - Electronic Temperature Control w/ A99BB-25C & Watertight Enclosure
13T103P	T103P - 24-Hour Mechanical Time Switch, 120 VAC, 60Hz, DPST, Indoor/Outdoor Plastic	13410	A421GBF-02C - Low Voltage Single Stage Electronic Temperature Control w/ A99BB-200C
	Enclosure, 1 Hour Interval	13411	A421GEF-01C - Low Voltage Single Stage
13T104P	T104P - 24-Hour Mechanical Time Switch, 208- 277 VAC, 60Hz, DPST, Indoor/Outdoor Plastic Enclosure, 1 Hour Interval	13415	Electronic Temperature Control w/ A99BB-25C A99BB-200C - PTC Temperature Sensor
177105	T105 - 24-Hour Mechanical Time Switch, 120 VAC, 60Hz, 1 NO/1 NC, SPDT, Indoor Metal Enclosure, 1 Hour Interval	13440	A19BAC-15C - Single Stage Thermostat
13T105		13450	T19SB-1C Stainless Thermostat 1 Stage
13T173	T173 - 24-Hour Mechanical Time Switch with Skip-a-Day, 120 VAC, 60Hz, DPST, Indoor Metal Enclosure, 1 Hour Interval	13452	T19PC-2C Watertight Thermostat 1 Stage

PRO-TECH CONTROLLERS AND SENSORS





#13105

Voltage Minder

Curtain Minder

NEW PRODUCTS





#13100



#13108

7

Temp Minder



DOSATAK®

Medicator

- Durable diaphragm system, even in the presence of hard water • Internal and isolated injection, chemicals do not come in contact with internal
- mechanisms, prolonging the life of the Dosatak • Uses water pressure as the driving force, eliminating the need for electrical energy
- Automatic and precise dosing
- Designed for poor water quality due to sugar sand, iron and hard water
- Tested and approved by top industry professionals
- Easy to install and maintain

Operating Pressure

Inlet / Outlet

- Medication does not enter motor creating longer motor life
- Features a Diaphragm injector between the water driven pump and the product being injected

Technical Data

Adjustable Dosing Range	1:64 - 1:256 (1.6% - 0.4%)
Waterflow Rate	0.02gpm - 11gpm (4.5L/hr - 2,500L/hr)
Operating Process	3psi - 80psi

Operating Temperature Range 41°F - 104°F



EGG BELT & MANURE BELT ACCESSORIES

A new, heavier duty version of the best egg belt on the market. Now available in 3 3/4"!

- UV treated to prolong belt life
- Anti-static treated
- Pre-stretched with heat and tension to reduce stretch in the hen house
- Coated yarn makes the belt more washable
- New polyethylene fill yarn is more resistant to ammonia and methane gases
- Available in 840', 1040', and 1240' rolls



Manure Drying System




#60999-1200mm	#6691


POULTRY NETTING AND BARRIER FENCE


(0.21bar - 5.5bar)

External thread 3/4"

M: BSP - NPT







#29750 #29760

Barrier Fence

WATER FILTERS #66401



#10001

Stainless Steel Hex Wire

#29055 #29056

Poultry Netting

2.5"X10" Activated Carbon Water Filter Cartridge











Clipper Unibar Stainless Belt Lacing - 12"



#66401

Plastic Hold Down Clip

CURTAIN REPAIR

PLUMBING SUPPLIES



See more on pg. 36

Plumbing supplies



WINCHING

PERSONAL PROTECTIVE EQUIPMENT





#70011-50PK & #70013-50PK Disposable Coverall

N95 Face Mask with Respirator

#70005-20PK

HANGERS AND CLAMPS

Item #	Description
19501	Turkey Feeder Pipe Clamp
19502	Feed Tube Clamp - 1.75"
19504	Feed Tube Clamp - 3.25"
19505	Feed Tube Clamp - 3.5"
19506	Feed Tube Clamp - 4"
19521	Wire Form Pipe Hanger for Turkeys
19570	Fill Pipe to Flex Pipe Coupler

PULLEYS



#18258 2 1/2" Red Nylon Composite

with Shields

#18365

3 1/2" Cast Bearing Pulley with Shields

#18455

4 1/2" Cast Bearing Pulley with Shields

#18255-SS

2 1/2" White with Stainless Steel Straps and Hardware

CHAIN



#19602

#17018

#2 Galvanized Steel Double Loop 100' Chain 3/16" Carabiner Clips



#19602-SS

#2 Stainless Steel Double Loop 100' Chain

HOSE AND FITTINGS

#26015

2 holes - 3"

Metal Pipe Strap with



#26004

Stainless Steel Hose Clamp - 2 9/16" - 3 1/2" NEW PRODUCTS







#70001

Boot Covers *Fits up to size 12*

TOOLS



Cable Cutter



#20501 #20502 #20503

Torx 2" Impact Screw Bit: T25, T30, T40



#26005

Stainless Steel Hose Clamp - 3" - 4"



#26006

Stainless Steel Hose Clamp - 3.5" - 5.5"



FOGGER NOZZLES



ltem #	Description	
26101	1 GPH 100 PSI	
26102	2 GPH 100 PSI	
26103	3 GPH 100 PSI	



SUPPLEMENTAL FEEDING



#35725

Short Swing Mate

HARDWARE



#15020

Ceiling Hook



Self Tapping Screw - #10 X 5/8" With Neoprene Washer



#19014

1/4" Eye Grab Hook ZP

Winches That Earned Their Reputation

Oven-cured black epoxy coating preferred by the poultry, swine and dairy industries | Shafts and gear made of high tensile alloy steel | All gears are heat-treated to provide longer life



AMT WINDLIFT PRIME DRINKER WINCH 2000LB WORM GEAR WITH DIVIDED REEL

The perfect companion to our WindLift 5000 Winch

- 2000 lb rated capacity
- 900 lb working load capacity
- Used to winch drinkers
- Add New AMT Winch Slings on pg 11 for cable-free drinker winching system



#35726

Long Swing Mate



CEILING WINCHES



#24050

WINCHING

WINDLIFT 5000LB **OVERHEAD WINCH**

The finest Winches we have seen in over 35 years of business

- 1.75 in hub diameter
- 1/4 in maximum cable size
- Holds 60ft of 3/16 in or 45 ft of 1/4 in cable
- 5000 lb capacity
- 90:1 Ratio No double-back required
- Completely Sealed Maintenance Free
- Divided Reel
- Add Strap Kit #24054 or New AMT Winch Slings on pg 11 for cable-free winching system
- Available in Orange

WindLift 5000 winches are designed to pull in both directions simultaneously. They are not recommended or warrantied for single pull applications





CEILING WINCHES



#240461

WINDLIFT 4600 HEAVY **DUTY WORM GEAR WINCH**

- Trouble-free worm gear design
- 4600 lb capacity
- Self-braking
- 65:1 gear ratio
- Divided reel
- Packaged 1Box
- Add Drum/Strap Kit **#24089**, Strap kit #240473 or New AMT Winch Slings for cable-free winching system.



2000 WORM GEAR WITH SINGLE REEL

- 2000 lb capacity
- Single reel
- Self-braking
- 41:1 gear ratio
- Loop drive

• Economical

Description

3/16" blue

Double back plate

• 45:1 gear ratio

1/4' x 500 ft sling rope on spool

3' sling with thimbles - 1/4" orange

30' sling with thimbles - 1/4" orange

45' sling with thimbles - 1/4" orange

60' sling with thimbles - 1/4" orange

70' sling with thimbles - 1/4" orange

500' sling rope on spool - 3/16" blue

15' winch sling with one thimble - 3/16" blue

25' winch sling with thimble on both ends -

H3000 winch.

• Allimite grease fitting

• 3000 lb capacity

#24030

#240302

H3000 CEILING WINCH

Our clutch design eliminates the

need for adjustment and has greatly

improved the dependability of the

	NEW DESIGN We have modified this winch for manual operation during power failure.
NO ASSEMBLY REQUIRED! INSTALL WINCH, PLUG IN, PRES UP OR DOWN	

#24051

WINCH SLINGS

- Break strength of 6,000 lbs.
- A winch spooling attachment designed to replace strap kits and winch cable.
- No more worn or frayed cable rusting and breaking before its time. No more strap alignment problems or overfilling spools.
- Made from material that is impervious to rust. Ready made slings dramatically reduce installation time.
- Tight bends kink cable and cause weak points. Slings have excellent bend and flex fatigue resistance. As a Drum is filled, the winch capacity reduces. Slings allow maximum winch capacity.
- Breakthrough wear properties result in long life even in repetitive cycle applications. Take advantage of our slings high breaking strength perfect for nests and chain feeders.

Item #	Description
240180	2000lb. single strap kit for 24025 winch
24054	Strap kit for WindLift 5000lb. winch
24022	Strap kit for WindLift 2000lb. electric winch
240473	Drum/Strap kit for 4600lb. & 4800lb. winches
240489	Strap kit for 4600lb & 4800lb winches
24053	Drum/Strap kit for 5000lb. winches
240182	Strap bolt for 24025 winch
240474	Strap bolt for WindLift 4600 & 4800 winches
24056	Strap bolt for 5000 lb. winches
240184	Strap bolt for 24044 WindLift winch
24055	Swivels for winch strap

STRAP KITS

Item #

251400

251403

251430

251445

251460

251470

253600

253615

253625

17002

- Straps provide more strength than cable at the point of maximum stress
- A must for use with softer and more brittle stainless steel cable
- Straps provide for smoother operation of winching system



#24054



- Designed for drinker lines
 - New manual override option
 - Weight: 42 lbs
 - 110 volt
 - Amperage: 7 at full load
 - Brake motor for sure and safe stop



ELECTRIC WINCHES

WINDLIFT 5000 ELECTRIC WINCH

The Best Selling Feeder Winch Goes Electric

Built with the heart of our reliable WindLift 5000 manual winch. Pre-wired with motor and controller for easy installation. Built withstand harsh conditions in poultry, turkey and swine buildings.

- Designed for feed lines
- Weight: 42 lbs
- 110 volt
- Amperage: 7 at full load
- Brake motor for sure and safe stop
- Add Strap Kit #24054 or New AMT Winch Slings on pg 11 for cable-free winching system



MASTER CONTROL BOX FOR WINDLIFT 2000 & 5000 ELECTRIC WINCHES

Operate up to 6 AMT WL5000 & WL2000 Electric Winches from one location. This waterproof control box easily installs and has many safety features wired in to prevent power surges from damaging winches.

- Designed to be used with up to 6-24051 & 24021 AMT Electric Winch
- Controls up to 6 winches at once or individually
- Momentary On/Off Switch
- Designed for 110 volt wiring
- Waterproof Metal Electric Box

ELECTRIC WINCHES



WINCH CONTROL PACKAGES

Remote Control

You can now operate up to 4 WindLift 5000 Electric Winches with one electric control. Remote control comes preset, plug and go.

Item #	Description
24103	3 Winch Remote Control Package Includes 3 Winches (WL5000E), 3 Control Boxes, & 1 Remote Control
24104	4 Winch Remote Control Package Includes 4 Winches (WL5000E), 4 Control Boxes, & 1

Wind



#24007

WINDLIFT 600LB HAND WINCH

- 600 lb capacity
- 3.1:1 ratio
- 1 in Diameter Hub
- Cable keeper included • One-way ratchet free spools in
- off position • 8 1/2 in ez-grip handle requires less
- effort to turn under load
- Packaged 10/Box



WINDLIFT 1200LB LARGE HUB HAND WINCH

- 1200 lb capacity
- 4.1:1 ratio
- 2 in Diameter Hub
- Cable keeper included
- - off position
- Packaged 10/Box
- **Wind**Lift #24016

WINDLIFT 1400 HAND WINCH

• All the great features of our #24011 winch, but with 1400 lb capacity

WINDLIFT AUTO BRAKE WINCHES



WINDLIFT 1800LB HAND WINCH

- Auto brake locks the load see when the handle is released
- Double brake pawl for safety
- Comfort grip handle
- 5:1 gear ratio
- 2 in hub diameter
- Covered brake mechanism to protect against oil, dirt and elements

WINDLIFT 4800 ELECTRIC WINCH

- Trouble-free worm gear design
- 65:1 gear ratio
- Divided reel
- Includes pulley & belt
- Packaged 1/Box
- Add Strap Kit #240489 or New AMT Winch Slings on pg 11 for cable-free winching system

Note: Requires 1/2,3/4 or 1 HP Farm Duty Motor. Not Included .

Item #	Description
240481	WindLift 4800 Motor Ready Winch
240483-1/2 Prime	WindLift 4800 lb. Motor Ready with Pulleys, Belt & 1/2 HP Prime Motor
240483-3/4	WindLift 4800 with Pulleys, Belt, 3/4 HP Motor
240483-1/0	WindLift 4800 with Pulleys, Belt, 1 HP Motor
240473	Drum/Strap Kit
240489	Strap Kit

HAND WINCHES







#24011

• One-way ratchet free spools in

• 9 1/2 in ez-grip handle requires less effort to turn under load.



#24008

WINDLIFT 1200LB **REVERSIBLE HANDLE**

• Same as our **#24011** winch, but handle can be mounted on either side for easier installation



WINDLIFT 1200 **STAINLESS STEEL** HAND WINCH

- 1200 lb. capacity
- 4.1: ratio
- 9.5" Handle




WINCH BRACKET

- For mounting winch at right angle to building
- Same Posi-Glaze coating as our hand winches
- 10/box

CU	re	V
~ ~		

ltem #	Descriptions	Standard Package
24112	WindLift 1200 with Auto Brake	6
24118	WindLift 1800 with Auto Brake	2
24126	WindLift 2600 with Auto Brake	2







SELF-LOCKING **BRAKE WINCHES**

- Load stays locked in place when handle is released
- For vertical lifting applications • Handle is integral part of breaking mechanism
- A minimal load is required to pull line from the winch drum



DUTTON-LAINSON WINCHES

WORM GEAR WINCHES

• Load stays locked in place when handle is released

2000 40:1 Split Reel

2000 40:1 Single Reel

Description

Loop Drive

• Quiet operation

Item #

24320

24321

MEDIUM DUTY

- Heat treated gears
- Embossed, reinforced bases

is based on THIRD layer of line



HEAVY DUTY 2-SPEED

- Reversible ratchet
- Heat treated gears
- Quick-attach 9 1/2 in handle allows easy change from high speed to low gear, for heavier loads

Item #	Description	Item #	Description	I	tem #	Description
24342	1200 5.4:1	24313	1300 4.4:1	2	24325	2500 5.4:1 & 17.3:1
24343	1500 5.4:1	24314	1300 4.4:1 Large Hub	C 2	℃ 24326	2500 5.4:1 & 17.3:1 Hand Brake
24345	2500 17.3:1	B 24316	1600 5.4:1			3200 5.4:1 & 17.3:1
A 24346	3500 18.7:1	24318 1800 5.4:1		2	24332	Hand Brake

STANDARD DUTY

• 1-way ratchet

Description Item # 24306 600 3.2:1 24311 1100 3.7:1 24312 1100 3.7:1 Large Hub

AMT HAND WINCHES



#24006

AMT 600LB. HAND WINCH






#24010



AMT 1200LB. BRAKE WINCH

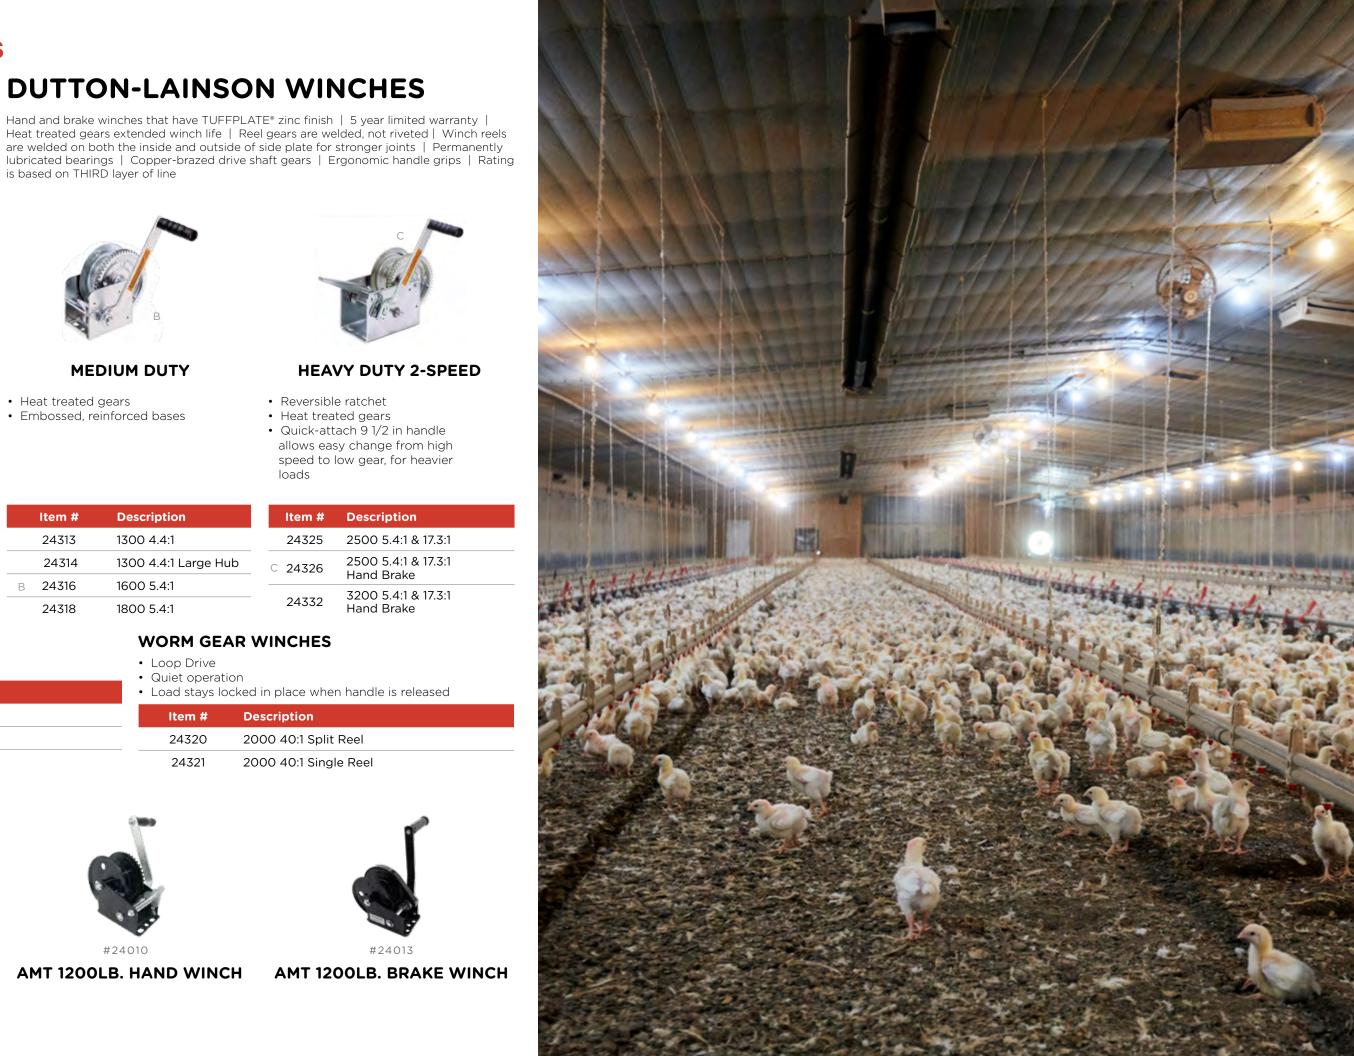

FEED LINE WINCHING SYSTEM

2

WINCHES & CONTROL BOXES



24050 or 24049 WindLift 5000 lb. Ceiling Winch

• 5000 lb. Capacity

3

- 2500 lb. working load (1250 lbs. pulling in opposite directions)
- 90:1 Ratio
- 2" Diameter divided reel
- Holds approximately 64' of 3/16" cable
- Reel is pre-drilled and tapped to accept strap kit
- Can Replace 2 Conventional Winches
- Oven-cured epoxy coating
- Winch is designed to pull in two directions simultaneously



WindLift 5000 lb. Ceiling Winch

- Electric version of above WindLift 5000 winch
- New manual override option
- 3/4 HP motor
- 1670 RPM motor with a 6/1 reduction for a net motor RPM of
- 278 and drum RPM of 3.09
- Voltage: 110-115



Winch-WindLift 4800 Lb. (Motor Ready With Pulleys, Belt & 1/2 HP Prime Motor)

- 2400lb. working load (1200lbs. pulling opposite directions)
- Trouble-free worm gear design
- Divided reel
- 65:1 gear ratio



#240512

Master Control Box for WL5000 **Electric Winch**

• Controls up to 6 WindLift 5000 lb. Electric Winches




		W ار 5	VINCHING SYSTEMS	N. S.
	6	07	9	
SL	INGS OR STRAPS			
		8		
• 24054 • 251400 • 251403 • 251430	500' Sling • 251460 3' Sling • 251465	60' Sling 65' Sling		
CLE	VISES & COUPLERS		CABLE CLAMPS	
3		4	.6.	
• 17072		king Clevis • 21317		3/16 Stainless
	SCREW HOOKS		CORD	
\$17	• 1503826 • 15038-CCCera		• 12062-1000	3/16" X 1000' 7/32"
	PULLEYS		CORD ADJUSTER	
7	18177Shielded Swivel P 18180Shielded Split P 18170Fiberglass Pulley 18174Fiberglass Split P 18171Nylon Swivel P 18172Nylon Split P 18354Cast Iron w/ Needle Bear	Pulley-1 3/4" With Hood Pulley-1 3/4" Pulley-1 7/8" Pulley-1 7/8"	• 19300 3/16 Cord Adjus	ter
A	MT PRIME CABLE	OR	SUSPENSION ROD	
9		Custom Lengths Available*		
3/16 7x7 • 23365-0500 • 23365-1000 • 23365-2500	1000' Cable • 23366-10001	.500' Cable • 17061-0450 1000' Cable • 17061-0490		590' Rod



		W ر 5	INCHING SYSTEM	IS P
c	6 LINGS OR STRAPS	67	9	
2		8		
• 24054 • 251400 • 251403 • 251430		60' Sling 65' Sling		
CLI 3	EVISES & COUPLERS	4	CABLE CLAMPS	
• 17072		ocking Clevis • 21317		3/16 Stainless
577	 SCREW HOOKS 15038 15038-CC Ce 		CORD • 12062-1000 • USA 12062-1000 • 12071 • USA 12071	3/16" X 1000' 7/32"
7	PULLEYS 18177Shielded Swivel 18180Shielded Split 18170Fiberglass Pulle 18174Fiberglass Split 18171Nylon Swive 18172Nylon Split 18354Cast Iron w/ Needle Be	Pulley-1 3/4" ey With Hood : Pulley-1 3/4" I Pulley-1 7/8" t Pulley-1 7/8"	• 19300 3/16 Cord Act	ljuster
4		OR *Custom Lengths Available*	SUSPENSION ROD	
3/16 7×7 • 23365-0500 • 23365-1000 • 23365-2500		500' Cable • 17061-0450 1000' Cable • 17061-0490		590' Rod








	wir الع	NCHING	i SYSTE	MS 🕅
45' Sling 60' Sling 65' Sling 70' Sling			9 CLAMPS	
	• 21316 • 21317 • 210316			
268" X 3 1/2" Ceramic Coated	6	• 12062-1000 • USA 12062-1 • 12071	000	
wivel Pulley-1 3/4" Split Pulley-1 3/4" Pulley With Hood Split Pulley-1 3/4" Swivel Pulley-1 7/8" Split Pulley-1 7/8" He Bearing - 3 1/2"	8	• 19300	DJUSTER	Adjuster
Custom Lengt		SUSPENS		
	 17061-0390 17061-0450 17061-0490 	450' Rod	• 17061-0590	

3/16 7x19
 • 23366-0500

	wi 5	NCHING SYSTE	EMS
6 S OR STRAPS	07	9	
P Kit • 251445	B		
S & COUPLERS	4	CABLE CLAMPS	
	• 21317	CORD	
	6	• 12062-1000 • USA 12062-1000 • 12071 • USA 12071	
ULLEYS Shielded Swivel Pulley-1 3/4" Shielded Split Pulley-1 3/4" Fiberglass Pulley With Hood Fiberglass Split Pulley-1 3/4" Nylon Swivel Pulley-1 7/8" Nylon Split Pulley-1 7/8" Cast Iron w/ Needle Bearing - 3 1/2"	8	• 19300 3/16 Con	
RIME CABLE OI *Custom Lengt		SUSPENSION RO	D
3/16 7x19 Cable • 23366-0500500' Cable Cable • 23366-10001000' Cable Cable • 23366-2500	 17061-0390 17061-0450 17061-0490 		




#240483-1/2 Prime

21







DRINKER LINE WINCHING SYSTEM

WINCHES & CONTROL BOXES



24025 - 2000 lb. Divided **Reel Worm Gear Winch**

- 2000 lb. capacity
- Self-braking
- 41:1 gear ratio
- Loop drive
- Drum Dimensions: 4 3/4" OD &
- 13/4" ID
- 1/8" Cable Capacity: 134' (67' per side)



24021 - WindLift 2000 **Electric Ceiling Winch**

- 2000 lb. capacity
- 9' power cord & 9' controller cord
- Holds approximately 134'
- (67' per side) of 1/8" cable
- Recommended 2:1 double-back for
- loads exceeding 1000lbs. 0.33 HP Motor

PULLEYS

• 18075	
• 18078	Ceramic Coated225" (1/4") X 3 1/



240483 1/2 Prime - WindLift 4800 Lb. Winch (Motor Ready With Pulleys, Belt & 1/2 HP Prime Motor)

- 2400lb. working load (1200lbs. pulling opposite directions)
- Trouble-free worm gear design
- Divided reel
- 65:1 gear ratio






• 253625	25' Sling	• 240180	Stra
• 253615	15' Sling	• 240489	Stra
• 253600	.500' Bulk Roll		

CLEVISES & COUPLERS



..Dead-End Clevis - 1/8" rap Kit • 17071. rap Kit • 17073. ...1/8" Auto Dead End • 17075. ...1/8" Rod Coupler

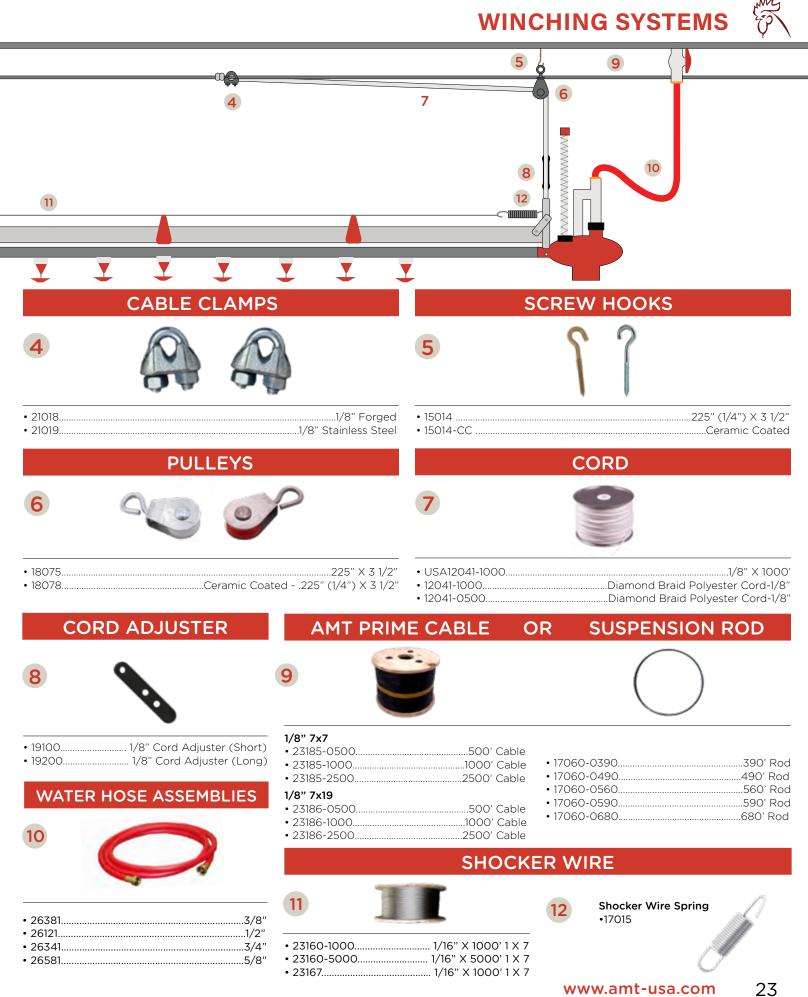


	11	
5/8"		
/2"		

WINCHING SYSTEMS



CEILING WINCH HANDLES

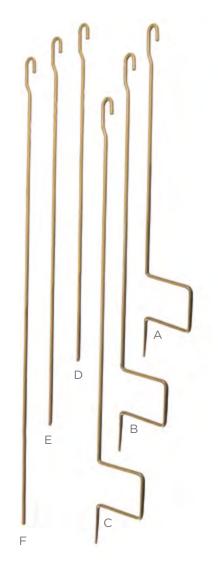

#240381

UNIVERSAL CEILING WINCH HANDLE

- One handle does it all
- Easily convert from manual to drill operated
- Adjustable from 4 ft to 8 ft length

Item #	Description
240381	Universal Ceiling Winch Handle
240382	Quick Connect Adapter for 240381
240383	Replacement Hex Shaft for 240381
240384	Replacement Hand Crank for 240381

CEILING WINCH HANDLES

- Power Crank is for raising ceiling winches with a drill
- Hand Crank is for raising ceiling winches manually

	Item #	Description
А	240363	3 ft Hand Crank for Ceiling Winch
В	240365	5 ft Hand Crank for Ceiling Winch
С	240368	8 ft Hand Crank for Ceiling Winch
D	240353	3 ft Power Crank for Ceiling Winch
Е	240355	5 ft Power Crank for Ceiling Winch
F	240358	8 ft Power Crank for Ceiling Winch

LUBRICANTS



FLUID FILM 11.75 OZ AEROSOL CAN

Best product ever made for rust & lubrication

Fluid Film[®] is a lanolin based rust/corrosion preventative and lubricant that provides long term protection and lubrication for all metal surfaces. Fluid Film[®] locks out and displaces moisture while lubricating moving parts for extended periods of time. It is not easily washed off with water, but creates a barrier of protection that continues to work even in the most corrosive environments. Fluid Film[®] is the worldwide standard for corrosion protection and lubrication.



#24211

SHP GREASE

Sold By the Box Only -Box of (10) 15 Oz. Tubes

SHP is a multipurpose, semi-synthetic extremepressure (EP) calcium sulfonate-complex grease for industrial, marine, mining and automotive applications in high temps, dusty, wet and corrosive environments with heavy shock loads.



This new cable has the corrosion resistance of stainless steel without the loss of strength and brittleness of

stainless. In our own independent salt spray test, regular galvanized cable shows red rust at 72-144 hours. With this New AMT Prime Galvanized Cable, we stopped the test at 600 hours with no rust.

AMT PRIME CABLE 1 X 7

Item #	Item #	Description	Standard Roll Lengths	
	23167	1/16 in	1000 fr 5000 ft	

AMT PRIME CABLE 7 X 7

ltem	n# D	escription	Standard Roll Lengths
233	35	3/32 in	2500 ft
2318	85	1/8 in	500 ft 1000 ft 2500 ft 5000 ft
233	65	3/16 in	500 ft 1000 ft 2500 ft

AMT PRIME CABLE 7 X 19

ltem #	Description	Standard Roll Lengths
23186	1/8 in	500 ft 600 ft 1000 ft 2500 ft
23536	5/32 in	500 ft
23366	3/16 in	500 ft 600 ft 1000 ft 2500 ft
23146	1/4 in	500 ft

WARRANTY FOR AMT PRIME CABLE

5 years prorated against rust for Prime Cable Only. (100% first 12 months. 1.67% for each month remaining after 12 months). All other galvanized and stainless steel cable carries our standard 12-month warranty. Cable is not guaranteed against breakage.

#24210



- Best grade of aircraft cable •
- High tensile strength
- Flexible
- Other sizes and constructions available
- Easy to handle

CUSTOM ROLL LENGTHS AVAILABLE. CONTACT US FOR PRICING AND AVAILABILITY.

AMT GALVANIZED CABLE 1 X 7

ltem #	Description	Standard Roll Lengths
23160	1/16 in	1000 fr 5000 ft

AMT GALVANIZED CABLE 7 X 7

ltem #	Description	Standard Roll Lengths
23331	3/32 in	2500 ft
23181	1/8 in	250 ft 500 ft 1000 ft 2500 ft 3500 ft 5000 ft
23361	3/16 in	500 ft 1000 ft 2500 ft

AMT GALVANIZED CABLE 7 X 19

ltem #	Description	Standard Roll Lengths
23332	3/32 in	1000 ft
23182	1/8 in	500 ft 1000 ft 2500 ft 5000 ft
23532	5/32 in	500 ft 1000 ft
23362	3/16 in	500 ft 1000 ft 2500 ft
23142	1/4 in	500 ft

AMT STAINLESS CABLE 7 X 7

Item #	Description	Standard Roll Lengths
23163	1/16in	1000 ft 2500 ft 5000 ft
23183 1/8 in		500 ft 1000 ft 2500 ft 5000 ft
3/16 in 23363K Korean Cable		500 ft 1000 ft 2500 ft

AMT STAINLESS CABLE 7 X 19

Item #	Description	Standard Roll Lengths	
23184	1/8 in	500 ft 1000 ft 2500 ft	
23534	5/32 in	500 ft	
23364	3/16 in	500 ft 1000 ft 2500 ft	
23144	1/4 in	*Call for custom roll lengths*	



SUSPENSION ROD

- The final piece in our cable-free winching system
- Use 1/8 in to winch drinkers and 3/16 in to winch feeders. nests and ventilation inlets
- 1/8 in & 3/16 in stocked in multiple roll lengths
- Use 3/16 in rod with #17070 Suspension Dead-End Clevis
- Use 1/8 in rod with our #17071 Suspension Dead-End Clevis
- Made from oil tempered spring wire
- Will not stretch like cable and regular non-tempered wire
- Other lengths available by special order



Item #	Description	Standard Lengths
17060	Suspension Rod - 1/8 in	390 ft 490 ft 560 ft 590 ft 680 ft
17061	Suspension Rod - 3/16 in	390 ft 450 ft 490 ft 560 ft 590 ft 680 ft
17062	Stainless Steel Wire - 1/8 in	400 ft 500 ft 600 ft
17063	Stainless Steel Wire - 3/16 in	500 ft 600 ft

HIGH TENSILE WIRE - 12.5 GAUGE

- Highest grade 200,000 PSI
- Stocked in 2000 ft rolls
- Inexpensive alternative for ventilation main line





SUSPENSION DEAD END CLEVIS

- For professional connection of 1/8 in or 3/16 in suspension rod to cable or winch straps
- Crimp at least nine times with item #14002 or with the smallest hole on
- To use correctly, loop the suspension rod in a wide arch back to itself, and secure with two cable clamps

Item #	Description	Standard Package
B 17070	Suspension Dead End Clevis - 3/16 in	1
A 17071	Suspension Dead End Clevis - 1/8 in	1
□ 17072	Suspension Dead End Clevis - 3/16" (Auto Locking)	1
C 17073	Suspension Dead End Clevis - 1/8" (Auto Locking)	1
F 17074	3/16" Steel Rod Coupler	1
E 17075	1/8" Steel Rod Coupler	1



CABLE CLAMPS - WIRE ROPE CLIPS

Item #	Description	Standard Package
A 21018	1/8" Galvanized	2000
B 21316	3/16" Galvanized	1000
21014	1/4" Galvanized	500
21015	1/4" Stainless Steel	100
21015- Forged	1/4" Stainless Steel (Forged)	100
21016	1/16" Galvanized	500
21056	5/16" Galvanized	100
21038	3/8" Galvanized	100
21019	1/8" Stainless Steel	100
C 21317	3/16" Stainless Steel	100
21057	5/16" Stainless Steel	100
210018	1/8" Galvanized Drop Forged	500
210316	3/16" Galvanized Drop Forged	400



CORD & ROPE

- Made of the finest polyester yarn available
- Less stretch and longer life than cheaper nylon cords
- Used for winching curtains, feeders, drinkers, ventilation boards, tunnel doors, etc.
- Use our special low stretch, coated 3/16in cord, #12062 along with our **#19300** Cord Adjuster for feeder drops
- Use 7/32in low stretch, coated cord for breeder nest drops, item **#12071**
- **#12064** Super Cord is an extremely strong polyester cord with an enhanced core that can be used in place of cable or straps on a winch drum to maximize the lifting capacity of the winch. This cord has a break strength of 3,255 lbs.
- We now offer many of our cords that are **MADE IN THE USA** as an option for customers. These cords have the prefix USA before the item number.

STA-KONS

- Our Sta-Kons are the only ones in the industry made of copper alloy instead of steel. They will not react with and weaken stainless steel cable.
- Provides attachment point for tying cord to cable.
- Open Sta-Kons do not need to be threaded on cable before installation
- Install with Sta-Kon tool #16001 shown on the Tools Page 45



CORD ADJUSTERS

• Allows quick and easy adjustment of cord

Item #	Description	Standard Package	Item #	Description	Standard Packag
A 19100	1/8 in x 1 1/2 in	1000	19400	Turtle Rope Fairlead	350
B 19200	1/8 in x 3 in	500			
C 19300	3/16 in x 3 1/2 in	500			

CORD, ROPE & CABLE FITTINGS



ltem #	Description	Standard Package
12040	1/8in (#4) x 1000ft Interlock Cord	12 Rolls
12041-0500	1/8in (#4) x 500ft Low Stretch Diamond Braid	16 Rolls
12041-1000	1/8in (#4) x 1000ft Low Stretch Diamond Braid	12 Rolls
12051	5/32in (#5) x 1000ft Standard Diamond Braid	4 Rolls
12061	3/16in (#6) Black x 1000ft Ski Rope	1 Roll
12060	3/16in (#6) x 1000ft Standard Diamond Braid	4 Rolls
12062-0500	3/16in (#6) x 500ft Low Stretch Diamond Braid	8 Rolls
12062-1000	3/16in (#6) x 1000ft Low Stretch Diamond Braid	4 Rolls
12064	3/16in (#6) x 600ft Black Super Cord	1 Roll
12071	7/32in (#7) x 1000ft Low Stretch Diamond Braid	4 Rolls
12080	1/4in Black x 1000ft Ski Rope	1 Roll
USA12041- 1000	1/8in (#4) x 1000ft Low Stretch Diamond Braid	12 Rolls
USA12062- 1000	3/16in (#6) x 1000ft Low Stretch Diamond Braid	4 Rolls

	D	
Item #	Description	Standard Package
D 16181	1/8 in Regular	500
E 16182	1/8 in Open	500
⊢ 16316	3/16 in Regular	500



#19400

CORD, ROPE & CABLE FITTINGS




CURTAIN THUMB NUTS

The **Original** Azuma Nuts

- For attaching cord directly to cable
- Provides easy installation and adjustment
- Best for do-it-yourself installation and adjustment
- Best for ventilation boards
- New improved design will not strip out

Item #	Description	Standard Package
A 16500	Curtain Thumb Nuts - 1/8 in Black	300
B 16501	Curtain Thumb Nuts - 3/16 in Red	300



TURNBUCKLES

• Hooks & eyes are steel with

• 100/Box

bright zinc finish

	Hook & Eye	Length			Вс	Inside Eye	
	Item #	Thread	Minimum	Maximum	Length	Diameter	Diameter
	A 15025	5/16 in - 18	7 in	9 3/4 in	3 3/4 in	3/4 in	3/8 in
h	B 15026	3/8 in - 15	12 in	17 1/2 in	7 in	15/16 in	1/2 in


• Bodies are high-tensile, zinc-alloy die casting with smooth, shiny finish

Hook & Eye		Length			Body	
Item #	Thread	Minimum	Maximum	Length	Diameter	Eye Diameter
A 15025	5/16 in - 18	7 in	9 3/4 in	3 3/4 in	3/4 in	3/8 in
B 15026	3/8 in - 15	12 in	17 1/2 in	7 in	15/16 in	1/2 in

CABLE ADJUSTERS

• Allows quick and easy adjustment of cable

Item #	Description	Standard Package
C19000	Cable Adjusters - 2 in Galvanized Regular	1000
D 19003	Cable Adjusters - 3 in Galvanized Long	500
∈ 19004	Cable Adjusters - 3 in Chore-Time Style	500
F 19005	Cable Adjusters - 3 in Flat	500

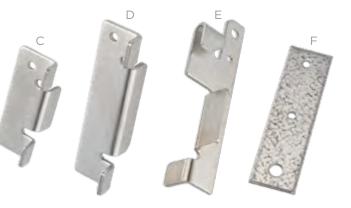



CABLE SLEEVES & STOPS

- All aluminum or all copper construction
- Install with Nicopress tools
- For permanent cable to cable connections
- Cable Stops prevent cable ends from fraying
- Use aluminum for galvanized cable copper for stainless steel cable

		Chandand
Item #	Description	Standard Package
G 14019	Copper Cable Stops - 1/8 in	1000
⊣ 14183	Copper Sleeves - 1/8 in	1000
14317	Copper Sleeves - 3/16 in	1000
J 14018	Aluminum Cable Stops - 1/8 in	1000
K 14031	Aluminum Cable Stops - 3/16 in	1000
14032	Aluminum Cable Stops - 3/32 in	1000
∟ 14116	Aluminum Sleeves - 1/16 in	1000
14141	Aluminum Sleeves - 1/4 in	1000
M 14181	Aluminum Sleeves - 1/8 in	1000
N 14182	Aluminum Sleeves - 1/8 in x 3/16 in	1000
0 14316	Aluminum Sleeves - 3/ 16 in	1000
₽ 14332	Aluminum Sleeves - 3/32 in	1000
14532	Aluminum Sleeves - 5/32in	1000
14018-NB	Aluminum Cable Stop - 1/8"	1000
14031-NB	Aluminum Cable Stop - 3/16"	1000

TENSION SPRINGS

- Keeps ventilation cables tight
- American Made
- Wide Selection
- 10/Box
- With end clips for extra security

Item Number	Description
17026	110 lb
C 17029	160 lb
17031	180 lb
17034	240 lb

CABLE THIMBLES

Item Number	Description
G 21401	Cable Thimble - 1/8 in Zinc Plated
21401-SS	Cable Thimble - 1/8 in Stainless Steel
21402	Cable Thimble - 3/16 in Zinc Plated
21404	Cable Thimble - 1/4 in Hot Dipped Galvaniz









- Tension spring for shocker wire on feeders and drinkers
- 250/Box

Iten	n Number	Description
D	17015	Spring for Shocker Wire on Drinkers
Е	17016	Spring for Shocker Wire on Feeders
F	21516	Shocker Wire Clamp




ized

197 **MOTORS AND POWER TRANSMISSION**

AMT PRIME POWER V-BELTS



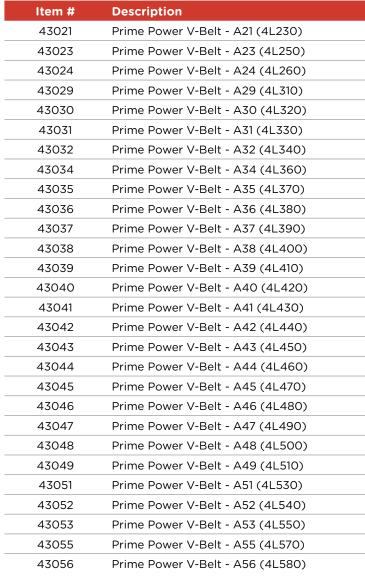

POWER CORDS



Item #	Description	Package	Item #	Description	Package
A 28001	115v 118 in (3M) 16/3 SJT Black	50	E 28005	115v Receptacle NEMA 5-15R -115v 118in (3M)	50
B 28002	230v 118 in (3M) 16/3 SJT Black	50		14/3 SJT Black	
C 28003	115v 118 in (3M) 14/3 SJT Black	50	F 28006	230v 118 in (3M) 14/3 SJT Black	50
028003			G 28007	230 volt Receptacle 14/3 SJT	50
D28004	230v 118 in (3M) 14/3 SJT Black	50	28023	UL/CUL Nema5-15p Plug, Other End W/ 3pcs Fork Terminal, SJTOW 14/3C, 10ft Length	40





AMT Prime Auger Motors

ltem #	Description
30050	1/2 HP Auger Motor
30075	3/4 HP Auger Motor
30100	1 HP Auger Motor
30150	1.5 HP Auger Motor



AMT Prime Fan Motors

Item #	Description
32050	1/2 HP Fan Motor
32100	1 HP Fan Motor
32150	1.5 HP Fan Motor



AMT Prime Farm Duty Motors

_		
	Item #	Description
	34050	1/2 HP Farm Duty Motor
	34075	3/4 HP Farm Duty Motor
_	34100	1 HP Farm Duty Motor



ACCU-LINK BELT

PULLEY SHEAVES

Item #	Description
455104	AK-104 x 1 in Pulley Sheave
45584	AK-84 x 1 in Pulley Sheave
45594	AK-94 x 1 in Pulley Sheave
457015	Timing Belt 700H150
45820	AK-20 x 5/8 in Pulley Sheave
45822	AK-22 x $5/8$ in Pulley Sheave
45823	AK-23 x 5/8 in Pulley Sheave
45825	AK-25 x 5/8 in Pulley Sheave
45826	AK-26 x 5/8 in Pulley Sheave
45827	AK-27 x $5/8$ in Pulley Sheave
45828	AK-28 x 5/8 in Pulley Sheave
45830	AK-30 x 5/8 in Pulley Sheave
45831	AK-31 x 5/8 in Pulley Sheave

Item #	Description
 45832	AK-32 x 5/8 in Pulley Sheave
 45834	AK-34 x 5/8 in Pulley Sheave
 45835	AK-35 x 5/8 in Pulley Sheave
 45839	AK-39 x 5/8 in Pulley Sheave
45841	AK-41 x 5/8 in Pulley Sheave
 45843	AK-43 x 5/8 in Pulley Sheave
 45844	AK-44 x 5/8 in Pulley Sheave
 45851	AK-51 x 5/8 in Pulley Sheave
 45854	AK-54 x 5/8 in Pulley Sheave
 45884AL	AK-84 x 5/8 in Pulley Sheave
 45925	2AK-25 x 3/4 in Double Pulley Sheave
 46128	2BK-28 x 5/8 in Double Pulley Sheave
46225	2AK-25 x 1 1/8 in Double Pulley Sheave

MOTORS AND POWER TRANSMISSION



ltem #	Description
43057	Prime Power V-Belt - A57 (4L590)
43058	Prime Power V-Belt - A58 (4L600)
43059	Prime Power V-Belt - A59 (4L610)
43060	Prime Power V-Belt - A60 (4L620)
43061	Prime Power V-Belt - A61 (4L630)
43063	Prime Power V-Belt - A63 (4L650)
43065	Prime Power V-Belt - A65 (4L670)
43069	Prime Power V-Belt - A69 (4L710)
43071	Prime Power V-Belt - A71 (4L730)
43073	Prime Power V-Belt - A73 (4L750)
43077	Prime Power V-Belt - A77 (4L790)
43085	Prime Power V-Belt - A85 (4L870)
 43087	Prime Power V-Belt - A87 (4L890)
 43091	Prime Power V-Belt - A91 (4L930)
 44032	Prime Power Cogged V-Belt - AX32
 44035	Prime Power Cogged V-Belt - AX35
 44038	Prime Power Cogged V-Belt - AX38
 44039	Prime Power Cogged V-Belt - AX39
 44043	Prime Power Cogged V-Belt - AX43
 44045	Prime Power Cogged V-Belt - AX45
 44046	Prime Power Cogged V-Belt - AX46
 44047	Prime Power Cogged V-Belt - AX47
 44048	Prime Power Cogged V-Belt - AX48
 44049	Prime Power Cogged V-Belt - AX49
 44052	Prime Power Cogged V-Belt - AX52
 44053	Prime Power Cogged V-Belt - AX53
 44056	Prime Power Cogged V-Belt - AX56
 44058	Prime Power Cogged V-Belt - AX58
 44059	Prime Power Cogged V-Belt - AX59
 44061	Prime Power Cogged V-Belt - AX61
 44069	Prime Power Cogged V-Belt - AX69
 44075	Prime Power Cogged V-Belt - AX75
44077	Prime Power Cogged V-Belt - AX77



MOTORS AND POWER TRANSMISSION

Item #

40046

40047

40048

40049

40050

40051

40052



BESTORQ V-BELTS

		40052	V-Beil - AJ2 (4LJ40)
ltem #	Description	40053	V-Belt - A53 (4L550)
40000	V-Belt Sleeve Only	40054	V-Belt - A54 (4L660)
40015	V-Belt - A15 (4L170)	40055	V-Belt - A55 (4L570)
40016	V-Belt - A16 (4L180)	40056	V-Belt - A56 (4L580)
40019	V-Belt - A19 (4L210)	40057	V-Belt - A57 (4L590)
40020	V-Belt - A20 (4L220)	40058	V-Belt - A58 (4L600)
40021	V-Belt - A21 (4L230)	40059	V-Belt - A59 (4L610)
40022	V-Belt - A22 (4L240)	40060	V-Belt - A60 (4L620
40023	V-Belt - A23 (4L250)	40061	V-Belt - A61 (4L630)
40024	V-Belt - A24 (4L260)	40062	V-Belt - A62 (4L640)
40025	V-Belt - A25 (4L270)	40063	V-Belt - A63 (4L650)
40026	V-Belt - A26 (4L280)	40064	V-Belt - A64 (4L660
40027	V-Belt - A27 (4L290)	40065	V-Belt - A65 (4L670)
40028	V-Belt - A28 (4L300)	40068	V-Belt - A68 (4L700)
40029	V-Belt - A29 (4L310)	40069	V-Belt - A69 (4L710)
40030	V-Belt - A30 (4L320)	40071	V-Belt - A71 (4L730)
40031	V-Belt - A31 (4L330)	40073	V-Belt - A73 (4L750)
40032	V-Belt - A32 (4L340)	40074	V-Belt - A74 (4L760)
40033	V-Belt - A33 (4L350)	40075	V-Belt - A75 (4L770)
40034	V-Belt - A34 (4L360)	40077	V-Belt - A77 (4L790)
40035	V-Belt - A35 (4L370)	40079	V-Belt - A79 (4L810)
40036	V-Belt - A36 (4L380)	40083	V-Belt - A83 (4L850)
40037	V-Belt - A37 (4L390)	40085	V-Belt - A85 (4L870)
40038	V-Belt - A38 (4L400)	40087	V-Belt - A87 (4L890)
40039	V-Belt - A39 (4L410)	40088	V-Belt - A88 (4L900)
40040	V-Belt - A40 (4L420)	40091	V-Belt - A91 (4L930)
40041	V-Belt - A41 (4L430)	40129	V-Belt - B29 (5L320)
40042	V-Belt - A42 (4L440)	40133	V-Belt - B33 (5L360)
40043	V-Belt - A43 (4L450)	40135	V-Belt - B35 (5L380)
40044	V-Belt - A44 (4L460)	40138	V-Belt - B38 (5L410)
40045	V-Belt - A45 (4L470)	40144	V-Belt - B44 (5L470)

Description	Item #	Description
V-Belt - A46 (4L480)	40154	V-Belt - B54 (5L570)
V-Belt - A47 (4L490)	40158	V-Belt - B58 (5L610)
V-Belt - A48 (4L500)	41031	V-Belt - AX31 (Cogged)
V-Belt - A49 (4L510)	41032	V-Belt - AX32 (Cogged)
V-Belt - A50 (4L520)	41033	V-Belt - AX33 (Cogged)
V-Belt - A51 (4L530)	41034	V-Belt - AX34 (Cogged)
V-Belt - A52 (4L540)	41035	V-Belt - AX35 (Cogged)
V-Belt - A53 (4L550)	41036	V-Belt - AX36 (Cogged)
V-Belt - A54 (4L660)	41037	V-Belt - AX37 (Cogged)
V-Belt - A55 (4L570)	41038	V-Belt - AX38 (Cogged)
V-Belt - A56 (4L580)	41039	V-Belt - AX39 (Cogged)
V-Belt - A57 (4L590)	41041	V-Belt - AX41 (Cogged)
V-Belt - A58 (4L600)	41042	V-Belt - AX42 (Cogged)
V-Belt - A59 (4L610)	41043	V-Belt - AX43 (Cogged)
V-Belt - A60 (4L620)	41044	V-Belt - AX44 (Cogged)
V-Belt - A61 (4L630)	41045	V-Belt - AX45 (Cogged)
V-Belt - A62 (4L640)	41046	V-Belt - AX46 (Cogged)
V-Belt - A63 (4L650)	41047	V-Belt - AX47 (Cogged)
V-Belt - A64 (4L660)	41048	V-Belt - AX48 (Cogged)
V-Belt - A65 (4L670)	41049	V-Belt - AX49 (Cogged)
V-Belt - A68 (4L700)	41050	V-Belt - AX50 (Cogged)
V-Belt - A69 (4L710)	41051	V-Belt - AX51 (Cogged)
V-Belt - A71 (4L730)	41052	V-Belt - AX52 (Cogged)
V-Belt - A73 (4L750)	41053	V-Belt - AX53 (Cogged)
V-Belt - A74 (4L760)	41056	V-Belt - AX56 (Cogged)
V-Belt - A75 (4L770)	41057	V-Belt - AX57 (Cogged)
V-Belt - A77 (4L790)	41058	V-Belt - AX58 (Cogged)
V-Belt - A79 (4L810)	41059	V-Belt - AX59 (Cogged)
V-Belt - A83 (4L850)	41060	V-Belt - AX60 (Cogged)
V-Belt - A85 (4L870)	41061	V-Belt - AX61 (Cogged)
V-Belt - A87 (4L890)	41064	V-Belt - AX64 (Cogged)
V-Belt - A88 (4L900)	41065	V-Belt - AX65 (Cogged)
V-Belt - A91 (4L930)	41069	V-Belt - AX69 (Cogged)
V-Belt - B29 (5L320)	41077	V-Belt - AX77 (Cogged)
V-Belt - B33 (5L360)	41149	V-Belt - BX49 (Cogged)
V-Belt - B35 (5L380)	42054	V-Belt - A54K (Kevlar)
V-Belt - B38 (5L410)	43270	V-Belt - A3L270 (3L270)
V-Belt - B44 (5L470)	441250	V-Belt - XPA1250 (Cogged)

PULLEY BRACKET / CHAIN SPROCKET ASSEMBLY

Item #	Description	Sta Pac
A 17020	Pulley Bracket w/ Chain Sprocket Assembly	
17020-SS	Pulley Bracket/Sprocket Assembly with Stainless Steel Roller Chain	
17010	Pulley Bracket Only	
17021	Chain Sprocket Only with Strap	
B 17022	Chain Only - #40 x 30 in	
17022-100	Roller Chain - #40 x 100 ft	
C 17027	Roller Chain - Stainless Steel #40 x 30 in	
17027-100	Roller Chain - #40 x 100 ft Stainless Steel	
D 17028	Master Link	
17023	U-Bolt Only with Nuts	
E 17024	Horizontal Sprocket Assembly	
17030	Master Link - #40 Stainless Steel Roller Chain	
F 17032	Vertical Through Wall Sprocket Assembly	

DOUBLE LOOP CHAIN

Item #	Description	Standa Packag
G 19601	Galvanized Steel Double Loop Chain #2	100 ft
19601-SS	Stainless Steel Double Loop Chain #1	100 ft
19602	Galvanized Double Loop Chain #2	200 ft
H19602-SS	Chain #2 Stainless Steel	100 ft
19603	Double Loop Chain #3	200 ft
19610	Double Loop Chain #1	100 ft
19620	Double Loop Chain #2	250 ft

CLIPS

• 3/16 in



• #35 Zinc Plated


• 250 ft/box



- 1/4 in • 100/bag

32 www.amt-usa.com CHAIN & SPROCKETS



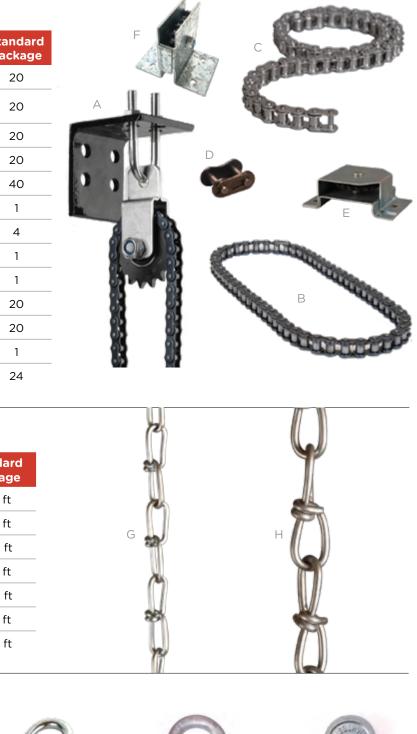



#17019

QUICK LINK



SCREW PIN ANCHOR SHACKLE • 5/16 in



EYE GRAB HOOK

- 1/4 in
- Zinc Plated



COMPOSITE/FIBERGLASS STRAP PULLEYS

Item #	Description	Standard Package
A 18075	7/8 in Nylon Swivel	1000
B 18170	1 3/4 in Red Nylon Swivel with Hood	300
C 18171	1 3/4 in White Nylon Swivel	400
D 18172	1 3/4 in White Nylon Split	400
E 18174	1 3/4 in Red Nylon Split	400
F 18176	1 3/4 in Fiberglass Composite Sheave	1000
G 18177	1 3/4 in Red Nylon Swivel w/Shields	300
H 18258	2 1/2" Red Nylon Composite w/ Shields	100
18180	1 3/4 in Red Nylon Split w/ Shields	300
J 18257	2 1/2 in Fiberglass Composite	100
K 18355	3 1/2 in White Nylon Pulley	50
∟ 18357	3 1/2 in Red Nylon Pulley	50
M 18350	3 1/2 in Cast Sheave	50
N 18360	3 1/2 in Fiberglass Composite Sheave	130

STEEL STRAP PULLEYS

Item #	Description	Standard Package
N 18151	11/2 in Steel Strap	250
0 18154	11/2 in Steel with Roller Bearing	200
P 18251	2 1/2 in Steel Strap	100
Q 18254	2 1/2 in Steel with Roller Bearing	100
R 18275	2 3/4 in Heavy-Duty Steel Strap	100


CAST IRON STRAP PULLEYS

ltem Number	Description	Standard Package
S 18351	3 1/2 in Cast Iron	25
⊤ 18352	3 1/2 in Cast with I-Bolt	25
∪ 18354	3 1/2 in Cast with Needle Bearing	25
V 18454	4 1/2 in Cast with Needle Bearing	20
W 18365	3 1/2" Cast Bearing w/Shields	20
× 18455	4 1/2" Cast Bearing w/Shields	20







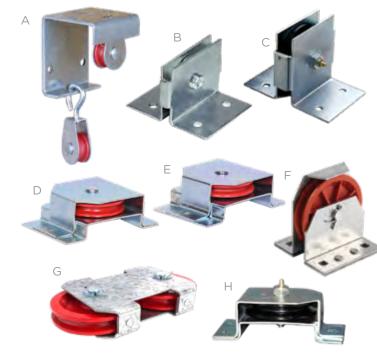



STAINLESS STEEL PULLEYS

Item #	Description	Standard Package	Item #	Description	Standard Package
18078	7/8 in with Red Sheave	1000	Q 18254-SS	2 1/2 in Steel with Roller Bearing	100
J 18138	1 3/8 in Stainless Steel Split Pulley	250	R 18353-SS	3 1/2 in Horizontal Composite with Stainless Steel Bracket	20
K 18151-SS	1 1/2 in Steel Strap	250	^S 18354-SS	3 1/2 in Cast Wheel with Bearing	25
∟ 18170-SS	1 3/4 in Red Fiberglass with Hood	300			
M 18171-SS	1 7/8 in White Nylon Swivel	400	18257-55	2 1/2 in Cast Wheel with Bearing	25
N 10172 CC		400	U 18357-SS	3/12 in Red Nylon Composite	50
N 18172-SS	1 7/8 in White Nylon Split	400	10750.00	3 1/2 in Vertical Composite with	
0 18174-SS	1 3/4 in Red Nylon Split	400	∨ 18358-SS	Stainless Steel Bracket	20
P 18251-SS	2 1/2 in Short Steel Strap	100	W18255-SS	2 1/2" w/ Stainless Steel Straps and Hardware	100





BRACKET PULLEYS

Item #	Description	Standard Package
A 18090	Bracket Pulley for Vent Doors	120
B 18256	2 1/2 in Steel Through Wall Bracket with Roller Bearing	30
C 18356	3 1/2 in Cast Iron Through Wall Bracket with Needle Bearing	24
D 18353-Cast	3 1/2 in Horizontal Cast Iron	20
E ¹⁸³⁵³ - Composite	3 1/2 in Horizontal Composite Pulley	20
F 18358	3 1/2 in Vertical Fiberglass Composite	20
G 18361	3 1/2 in Double Back Cast Iron	10
H 18363	3 1/2 in Horizontal Cast w/ Bearing	20



PIPE HANGERS

- Half clamp with nail
- Barbed nail for extra gripping strength in wood
- For installing water distribution piping
- Manufactured from high impact, high density polyethylene

Item #	Description	Standard Package
26020	3/4 in (1/2 PVC)	50
26021	1 in (3/4 in PVC)	50

HOSE CLAMPS

American Made Stainless Steel



Item #	Description	Standard Package
26001	1/4 in - 5/8 in	100
26002	1/2 in - 1 1/8	100
26004	2 9/16" - 3 1/2"	50
26005	3" - 4"	50
26006	3 1/2" - 5 1/2"	50

PIPE STRAPS - 2 HOLE

- Zinc plated
- For mounting gas and water pipe
- Made to fit our "Z" Bracket, Item #17200

Item #	Description	Standard Package
26010	Metal Pipe Strap - 3/4 in	500
26011	Metal Pipe Strap - 1 in	500
26015	Metal Pipe Strap - 3 in	100

PIPE STRAPS - 1 HOLE

• Zinc Plated

ltem #	Description	Standard Package
26012	Metal Pipe Strap - 1/2 in w/ one hole	1000
26013	Metal Pipe Strap - 3/4 in w/ one hole	500
26014	Metal Pipe Strap - 1 in w/ one hole	500

GAS, WATER & AIR HOSE

Item #	Description	Standard Package
A 26380	Vapor LPG Gas Hose	250 ft Roll
B 26381	Air & Water hose - 3/8 in Red	250 ft Roll
C 26121	Air & Water hose - 1/2 in Red	250 ft Roll
D 26581	Air & Water hose - 5/8 in Red	250 ft Roll
Е 26341	Air & Water hose - 3/4 in Red	250 ft Roll
F 26125	Garden Hose - 1/2 in Green	250 ft Roll
G 26345	Garden Hose - 3/4 in Green	250 ft Roll

PLUMBING Z BRACKET

Offset bracket for pipe
Pre-drilled to fit our 3/4 in and 1 in Pipe Straps
200/Box



We now make pre-cut and crimped hose assemblies in house. All hose assemblies are made from our high quality red multi-purpose hose and brass fittings.

Please see the next page for a complete list of these items.



FILL SYSTEM FLEX HOSE

Item #	Description
26430	Black Fill System Flex Hose - 3 in x 25 ft
26435	Black Fill System Flex Hose - 3.5 in x 25 ft
26440	Black Fill System Flex Hose - 4 in x 25 ft
26431	Clear Urethane Fill System Flex Hose - 3 in x 25 ft
26436	Clear Urethane Fill System Flex Hose - 3.5 in x 25ft
26441	Clear Urethane Fill System Flex Hose - 4 in x 25 ft



GAS HOSE ASSEMBLIES

ALL GAS HOSE ASSEMBLIES ARE UL LISTED AND CSA CERTIFIED

Item #	Description	Standard Roll Lengths
26122	1/2 in LP/NG Hose Assembly w/ 1/2 in SAE Swivel Female	6 8 10 12 ft
26142	1/4 in LP/NG Hose Assembly w/ 1/4 in MPT x 3/8 in SAE Swivel Female	8 ft
26382	3/8 in LP/NG Hose Assembly w/ 3/8 in SAE Swivel Female	6 8 10 12 ft

PLUMBING SUPPLIES





WATER HOSE ASSEMBLIES

• Made with our 300 PSI Air & Water Hose

• Multi-Purpose with Female Brass GHT ends

Item #	Description
26381-04	3/8 in x 4 ft
26381-08	3/8 in x 8 ft
26381-09	3/8 in x 9 ft
26381-10	3/8 in x 10 ft
26381-11	3/8 in x 11 ft
26381-12	3/8 in x 12 ft
26121-03	1/2 in x 3 ft
26121-04	1/2 in x 4 ft
26121-08	1/2 in x 8 ft
26121-09	1/2 in x 9 ft
26121-10	1/2 in x 10 ft
26121-11	1/2 in x 11 ft
26121-12	1/2 in x 12 ft
26581-03	5/8 in x 3 ft
26581-04	5/8 in x 4 ft
26581-08	5/8 in x 8 ft
26581-09	5/8 in x 9 ft
26581-10	5/8 in x 10 ft
26581-11	5/8 in x 11 ft
26581-12	5/8 in x 12 ft
26341-03	3/4 in x 3 ft
26341-04	3/4 in x 4 ft
26341-08	3/4 in x 8 ft
26341-09	3/4 in x 9 ft
26341-10	3/4 in x 10 ft
26341-11	3/4 in x 11 ft
26341-12	3/4 in x 12 ft

PLUMBING SUPPLIES



HOSE FITTINGS

LAN CO

All fittings are brass Contact us for other fittings not listed below

Item #	Description
26141-41	1/4 in Hose Barb x 3/8 in Swivel
26141-51	1/4 in Hose Barb x 3/8 in MPT
26141-54	1/4 in Hose Barb x 1/4 in MPT
26381-40	3/8 in Hose Barb x 3/4 in FGHT Swivel
26381-50	3/8 in Hose Barb x 3/4 in MGHT
26381-51	1/2 in Hose Barb x 1/2 in MPT
26121-40	1/2 in Hose Barb x 3/4 in FGHT Swivel
26121-41	1/2 in Hose Barb x 1/2 in FPT Swivel
26121-50	1/2 in Hose Barb x 3/4 in MGHT
26121-51	1/2 in Hose Barb x 1/2 in MPT
26581-40	5/8 in Hose Barb x 3/4 in FGHT Swivel
26581-50	5/8 in Hose Barb x 3/4 in MGHT
26341-40	3/4 in Hose Barb x 3/4 in FGHT Swivel
26341-41	3/4'" Hose Barb x 34" FPT Swivel
26341-50	3/4 in Hose Barb x 3/4 in MGHT
26341-55	3/4 in MGHT x 3/4 in MPT
26121-40-SS	Stainless Steel 1/2" Male Hose Barb
26381-40-SS	Stainless Steel 3/8" Hose Barb w/ Female Swivel Garden Hose Thread



FOGGER NOZZLES

Item #	Description
A 26101	1 GPH Plastic Fogger Nozzle
B 26102	2 GPH Plastic Fogger Nozzle
C 26103	3 GPH Plastic Fogger Nozzles






PVC FITTINGS

Item #	Description
26602	1/2" PVC SCH 80 Compact Ball Valve
26603	3/4" PVC SCH 80 Compact Ball Valve
26604	1" PVC SCH 80 Compact Ball Valve
26605	11/4" PVC SCH 80 Compact Ball Valve
26606	11/2" PVC SCH 80 Compact Ball Valve
26607	2" PVC SCH 80 Compact Ball Valve
26613	3/4" SCH 40 PVC TEE SLIP X SLIP X SLIP
26614	1" SCH 40 PVC TEE SLIP X SLIP X SLIP
26615	11/4" SCH 40 PVC TEE SLIP X SLIP X SLIP
26616	11/2" SCH 40 PVC TEE SLIP X SLIP X SLIP
26617	2" SCH 40 PVC TEE SLIP X SLIP X SLIP
26623	3/4" SCH 40 PVC TEE SLIP X FPT X SLIP
26624	1" SCH 40 PVC TEE SLIP X FPT X SLIP
26632	1/2" SCH 40 90 DEGS PVC ELBOW SLIP X SLIP
26633	3/4" SCH 40 90 DEGS PVC ELBOW SLIP X SLIP
26634	1" SCH 40 90 DEGS PVC ELBOW SLIP X SLIP
26635	11/4" SCH 40 90 DEGS PVC ELBOW SLIP X SLIP
26636	11/2" SCH 40 90 DEGS PVC ELBOW SLIP X SLIP
26637	2" SCH 40 90 DEGS PVC ELBOW SLIP X SLIP
26643	3/4" SCH 40 90 DEGS PVC ELBOW SLIP X FPT
26644	1" SCH 40 90 DEGS PVC ELBOW SLIP X FPT
26653	3/4" SCH 40 PVC UNION SLIP X SLIP
26654	1" SCH 40 PVC UNION SLIP X SLIP

PLEASE CONTACT US FOR ANY HOSE FITTINGS THAT MAY NOT BE LISTED ON THIS PAGE.

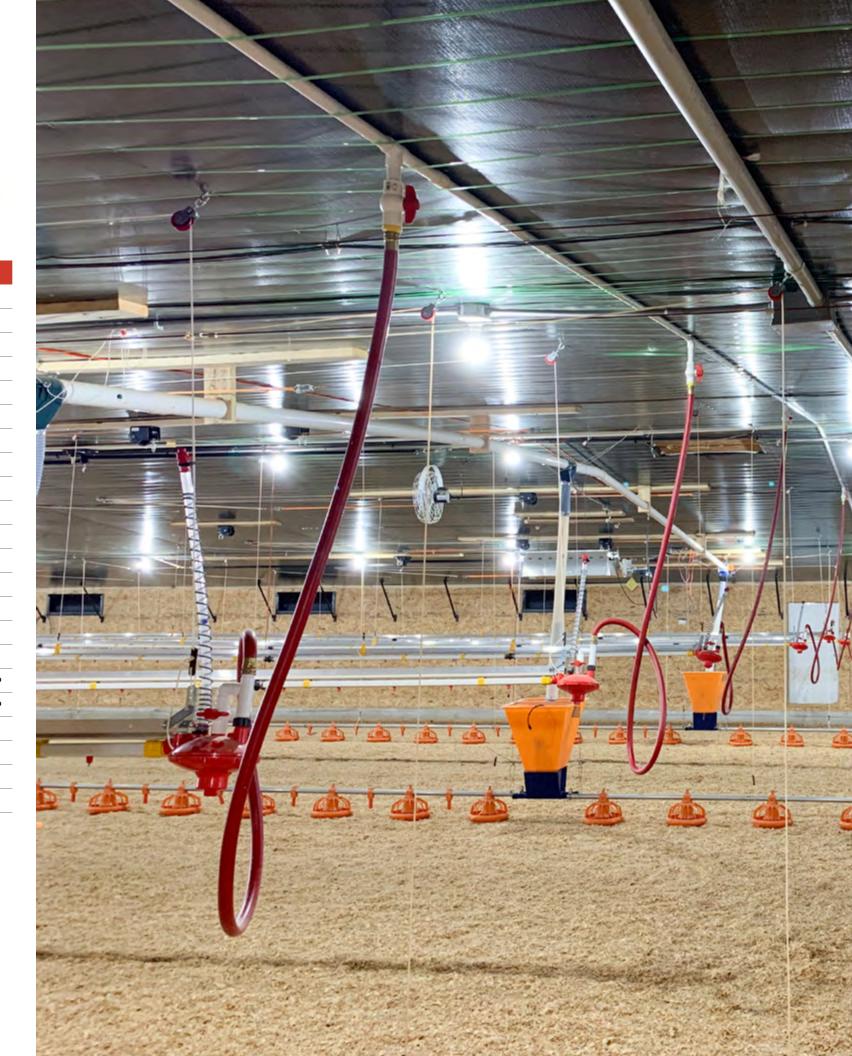

S. C. **PLUMBING SUPPLIES**



WATER FILTER HOUSINGS

ltem #	Description
52025	Filter Housing Wrench - Heavy Duty Standard 2.5 in x 10 in Housing
52045	Jumbo Filter Housing Wrench - For Big Blue Jumbo 4.5 in Housing
52011	Bottom O-Ring Only for 2.5 in x 10 in Heavy Duty Clear/Black Housing
A 52012	Top O-Ring Only for 2.5 in x 10 in Housing
B 52000	Black Filter Housing Bracket-Fits 2.5 in x 10 in & 20 in Filter Housing <i>(Without Screws)</i>
52001	Blue/Black Filter Housing - 2.5 in x 10 in Heavy Duty with Pressure Release
52002	Clear/Black Filter Housing - 2.5 in x 10 in Heavy Duty with Pressure Release
54000	Black Filter Housing Bracket - Fits 4.5 in x 10 in & 20 in Filter Housing (<i>Without Screws</i>)
54002	Clear/Black Filter Housing - 4.5 in x 10 in Heavy Duty w/ Pressure Release
54005	Blue/Black Filter Housing - Fits 4.5 in x 20 in Heavy Duty w/ Pressure Release
54012	Top O-Ring Only for 4.5 in Filter Housing



PLEASE CONTACT US FOR ANY WATER FILTERS AND HOUSINGS THAT MAY NOT BE LISTED ON THIS PAGE.



WATER FILTERS

Item #	Description	Quanti
52105	2.5 in x 10 in String Wound Sediment <i>(5 Micron)</i>	50
52110	2.5 in x 10 in String Wound Sediment (10 Micron)	50
52120	2.5 in x 10 in String Wound Sediment (20 Micron)	50
52130	2.5 in 10 in String Wound Sediment (30 Micron)	50
52150	2.5 in x 10 in String Wound Sediment (50 Micron)	50
52205	2.5 in x 10 in Poly Pleated Sediment Filter Cartridge (5 <i>Micron</i>)	50
52210	2.5 in x 10 in Poly Pleated Sediment Filter Cartridge (10 Micron)	50
A 52220	2.5 in 10 in Poly Pleated Sediment Filter Cartridge (20 Micron)	50
52250	2.5 in x 10 in Poly Pleated Sediment Filter Cartridge (50 <i>Micron</i>)	50
52620	2.5 in x 10 in Activated Carbon Water Filter Cartridge (<i>20 Micron</i>)	25
54105	4.5 in x 10 in String Wound Sediment Filter (5 Micron)	20



PLUMBING SUPPLIES





ity	Item #	Description	Quantity
	54110	4.5 in x 10 in String Wound Filter Cartridge (10 Micron)	20
	54120	4.5 in x 10 in String Wound Filter Cartridge (20 Micron)	20
	54150	4.5 in x 10 in String Wound Filter Cartridge (50 Micron)	20
	54320	4.5 in x 10 in Poly Pleated Sediment Filter Cartridge (5 <i>Micron</i>)	20
	54350	4.5 in x 10 in Poly Pleated Sediment Filter Cartridge (50 Micron)	20
	B 54420	4.5 in x 20 in Poly Pleated Sediment Filter Cartridge (20 Micron)	10
	54201	4.5 in 20 in Melt Blown Filter Cartridge (1 Micron)	10
	54205	4.5 in x 20 in Melt Blown Filter Cartridge (5 Micron)	50
	54520	4.5 in x 20 in String Wound Filter Cartridge (<i>20 Micron</i>)	10



EYE BOLTS

Item #	Overall Length	Shank Length	Thread Length	Thread Diameter	Inside Eye Diameter
A 15112	3 1/4 in	3 1/4 in	1 3/4 in	5/16 in	3/4 in
B 15106	2 in	1 in	3/4 in	1/4 in - 20	9/16 in
C 15108	3 in	1 3/4 in	1 1/4 in	1/4 in - 20	9/16 in
D 15117	4 in	2 3/8 in	2 1/8 in	3/8 in -16	13/16 in
E 15118	5 in	3 1/2 in	2 7/8 in	3/8 in - 16	13/16 in
F 15119	6 in	4 1/2 in	2 7/8 in	3/8 in -16	13/16 in





S	S	S	0
С	D	F	

Item # C *15515 1 D 15516


1 E 15517 1 F *15525 2

F

LAG EYE BOLTS

Item #	Overall Length	Shank Length	Thread Length	Thread Diameter	Inside Eye Diameter	Pieces/ Box
G 15204	2 3/16 in	1 1/2 in	15/16in	1/4 in	19/64 in	1000
H 15150	3 in	2 in	11/4 in	1/4 in	9/16 in	1000
15153	3 1/4 in	2 in	11/4 in	5/16 in	5/8 in	500
J 15158	4 1/2 in	3 1/16 in	2 in	3/8 in	3/4 in	300
K 15011	6 in	4 3/4 in	1 5/8 in	3/8 in	5/8 in	250





Μ

Item #	Overall Length	Wire Diameter	Eye Diameter	Gap	Pieces/Box
G 15855	3/4 in	.080 in	3/16 in	3/16 in	1000
H 15853	1 1/16 in	.092 in	1/2 in	1/4 in	1000
*15510	1 in	.105 in	7/32 in	3/16 in	1000
J 15811	11/4 in	.120 in	3/8 in	5/16 in	1000
K 15816	1 5/8 in	.135 in	1/2 in	3/8 in	2000
∟ 15859	2 1/8 in	.148 in	11/16 in	.675 in	1000

NUTS

Item #	Description	Standard Package
020000	Nuts - 1/4 in Zinc Plated	100
P 20001	Nuts - 5/16 in Zinc Plated	100
Q 20002	Nuts - 3/8 in Zinc Plated	100
R 20003	Nuts - 3/8 in - 16 Nylon Insert Lock Nut Zinc Plated	100
S 20004	Nuts - 5/16 in - 18 Nylon Insert Lock Nut Zinc Plated	100



Item # M 15510-SS Ν N 15515-SS

42 www.amt-usa.com





"S" HOOKS - HEAVY WIRE

• Our most popular and economical S-Hooks

Overall _ength	Wire Diameter	Eye Diameter	Gap	Pieces/Box
1 1/2 in	.177 in	7/16 in	5/16 in	2000
l 7/6 in	.192 in	11/16 in	5/16 in - 1/2 in	2000
3/4 in	.192 in	9/16 in	3/8 in	1500
2 1/4 in	.262 in	11/16 in	7/16 in	1000

*Indicates our most popular sizes

"S" HOOKS - LIGHT WIRE

*Indicates our most popular sizes

"S" HOOKS - STAINLESS STEEL

Overall Length	Wire Diameter	Eye Diameter	Gap	Pieces/Box
1 in	.105 in	7/32 in	3/16 in	1000
1 1/2 in	.177 in	7/16 in	5/16 in	2000



WASHERS

Item #	Description	Standard Package
A 20036	Fender Washers - 3/16 in x 1 in Zinc Plated	1000
B 20037	Washers - 5/16 in x 7/8 in Flat Zinc Plated	1000
C 20038	Washers - 3/8 in x 1 in Flat Zinc Plated	1000
D 20039	Fender Washers - 5/16 in x 1 1/2 in Zinc Plated	1000
∈ 20353	Fender Washers - 1/2 in x 2 in	100
F 20380	Lock washers - 3/8 in Split Zinc Plated	100
20400	1/4 in Flat Washer	100

BOLTS

Item #	Description	Standard Package
G 20100	Bolts - 5/16 in-18 x 1 in Zinc Plated	100
H 20101	Bolts - 3/8 in-16 x 1 in Zinc Plated	100
20150	Bolts - 3/8 in-16 x 1 1/2 in Zinc Plated	100
J 20300	Bolts - 5/16 in-18 x 3 in Zinc Plated	100
K 20251	Hex Hd Machine Bolts - 3/8 in-16 x 2 1/2 in Zinc Plated	100
∟ 20301	Hex Hd Machine Bolts - 3/8 in-16 x 3 in Zinc Plated	100



А

O

В

С

D

CARRIAGE BOLTS

Item #	Description	Standard Package
20214	Carriage Bolt - 1/4-20 x 2 3/4" Zinc Plated	100
M 20320	Carriage Bolts - 3/8 in - 16 x 2 in Zinc Plated	100
N 20321	Carriage Bolts - 3/8 in - 16 x 2 1/2 in Zinc Plated	100
0 20250	Carriage Bolts - 5/16 in - 18 x 2 1/2 in Zinc Plated	100
P 20330	Carriage Bolts - 3/8 in - 16 x 3 in Zinc Plated	100
Q 20331	Carriage Bolts - 2/8 in - 16 x 3 1/2 in Zinc Plated	100

0 Q Μ Ν Ρ

WEDGE ANCHOR BOLTS

Item #	Description	Standard Package
R 20350	Wedge Anchor Bolt - 1/2 in x 3.75 in	75
S 20352	Wedge Anchor Bolt - 1/2 in x 5.5 in	75



CUP HOOK DRIVERS

ltem #	Description
N 15001	Short 6 in model
0 15002	Long 24 in model



• For driving **#15014 & #15038** screw hooks with drill

|--|--|--|--|

LAG BOLTS

Item #	Description	Standard Package
20015	Lag Bolts - 1/4 in x 1 1/2 in Hot Dip Galvanized	100
20019	Lag Bolts - 1/4 in x 2 in Zinc Plated	1000
J 20020	Lag Bolts - 3/8 in x 2 in Zinc Plated	700
20021	Lag Bolts - 5/16 in x 2 in Zinc Plated	1000
K 20030	Lag Bolts - 3/8 in x 3 in Zinc Plated	500
20031	Lag Bolts - 5/16 in x 3 in Zinc Plated	700
20033	Lag Bolts - 5/16 in x 3 1/2 in Hot Dip Galvanized	500
20034	Lag Bolts - 5/16 in x 3 1/2 in Zinc Plated	600
∟ 20035	Lag Bolts - 3/8 in x 3 1/2 in Zinc Plated	400
M 20040	Lag Bolts - 3/8 in x 4 in Zinc Plated	400
20041	Lag Bolts - 5/16 in x 4 in Zinc Plated	600
20042	Lag Bolts - 1/4 in x 4 1/2 in Zinc Plated	800
20050	Lag Bolt - 3/8 in x 5 in Zinc Plated	250
20060	Lag Bolts - 3/8 in x 6 in Zinc Plated	250
20025	Lag Bolt - 3/8 in x 2.5 in	700

CERAMIC COATED LAG SCREWS





SCREWS, SCREW HOOKS & BOLTS



SCREW HOOKS

Item #	Description	Standard Package
15020	Ceiling Hook	500
15808	.159 in x 2 9/16 in	1000
15013	3/16 in x 2 1/2 in	1500
15014	.225 in 3 1/2 in	1000
15014-CC	.225 in (1/4 in) X 3 Ceramic Coated	1000
A 15015	.225 in x 3 1/2 Stainless Steel	1000
B 15038	.268 in x 3 1/2 in	500
15038-CC	.268 in x 3 1/2 in Ceramic Coated	500
15038-SS	.268 in x 3 1/2 in Stainless Steel	500
C 15039	3/8 in x 4 in	500
D 15050	.268 in 5 in	500
E 15802	.272 in x 4 7/16 in Wide Mouth	500
F 15205	Rope and Pulley Hook	100
15805	Bike Hook	100



SCREWS

_	Item #	Description	Standard Package
_	20008	Self Tapping Screw - #10 X 5/8" With Neoprene Washer	5000
_	G 20010	Self Tapping Screw - #10 x 1 in with Neoprene Washer	3000
_	H 20011	Twin Drive Screw #10 x 1 in	2500
_	20012	Drywall Screw - Size 8 x 2 in	3500
	J 20013	#9 x 1.5 in Wood Screw w/ Washer	2500

Item #	Description	Standard Package
K 20335	5/16" X 3.5" (T40)	700
∟ 20440	3/8" X 4" (T40)	450
M 20220	1/4" X 2" (T30)	1800
N 201031	#10 X 3 1/8" (T25)	2200



TURBOMATES

The TurboMate is the first supplemental chick feeding pan to attach directly to the feed line. Designed for chicks to have easy access to clean feed for their first 14 days to promote better feed conversions, greater live weight gain, and better gut health.

The TurboMate replaces both the paper/plastic trays and the chick feeder downspouts and reduces your set up time between flocks. (Available in short or long models to accommodate different OEM feed pans)

Benefits:

- Improved Feed Conversion
- Greater live weight gain
- Improved uniformity
- Reduced labor cost

Item #	Description
35594	TurboMate 1 Short (25/box)
35595	TurboMate 1 Long (22/box)
35597	TurboMate 2 Short (22/box)
35598	TurboMate 2 Long (22/box)

TURBOGROWS



TURBOGROW 2 PLUS



Short & Long Versions Available



#35725 & #35726 SWING MATE *Short & Long Versions Available*



features:

levels.

Item #

35590

35591

35592

locking pin

Description

#35700 **TURBO TWIST**



#35597 & #35598

TURBOMATE 2

• Free-spins up and locks into place with the a

• Windows on the front and back of the feeder for easier cleaning and visualization of feed

Short & Long Versions Available

TurboGrow Feeder (Round)


TurboGrow Feeder Shallow

TurboGrow 2 Plus (Oval)

The TurboMate 2 has all the benefits of the

original TurboMate, but with a few added

TURBO TWIST TOOL



Item #	Description	Standard Package
A 19570	Fill Pipe to Flex Pipe Coupler	150
B 19521	Wire Form Pipe Hanger for Turkeys	200
⊂ 19530	Cumberland Style Feeder Hanger	300
□ 19510	Chore-Time Style Feeder Hanger	300
E 19520	Big Dutchman Style Wire Form Feeder Hanger	300
F 19560	Feeder Hanger Pipe Clamp	150




Item #	Description	Standard Package
G 19501	Turkey Feeder Pipe Clamp	200
H 19500	Feeder Tube Clamp	300
19502	Feed Tube Clamp - 1.75"	300
J 19504	Feed Tube Clamp - 3.25"	80
K 19505	Feed Tube Clamp - 3.5"	60
∟ 19506	Feed Tube Clamp - 4"	50



FEEDER HANGERS & PIPE CLAMPS





ADJUSTABLE ROOSTER FEEDER HANGER

- Programmable feeder hanger is made of galvanized steel • It has 9 different holes which a s-hook (15515) can be
- placed to adjust for tilt in feed lines and lock them into place. • This hanger has to be installed prior to shocker wire
- Sold in full box quantities of 150/box



AMT EASY ADJUSTABLE FEEDER HANGER

- Programmable feeder hanger is made of a composite fiberglass material
- It has 9 different holes which a s-hook (15515) can be placed to adjust for tilt in feed lines and lock them into place.
- Includes a cut out that slides over shocker wire so it can be installed without removing shocker wire
- Sold in Full box quantities of 250/box







47

BROILER INSULATOR BRACKET #17230



VFENCE™

 $\mathsf{VFence}^{\mathsf{M}}$ is designed specifically for the unique needs of the poultry production industry.

It improves airflow and circulation for better temperature control and efficiency resulting in lower utility bills and more consistent product.


The gate inserts prevent birds from getting inside the fencing where the fence has been cut.

Item #	Description
17320	V-Fence 12 in x 12 ft
17326	V-Fence 12 in x 6 ft
17329	Gate Insert for V-Fence - 12 in



MIGRATION FENCE

- 16 in x 12 in
- Use with #17300 Stand
- 1/2 in wire spacing

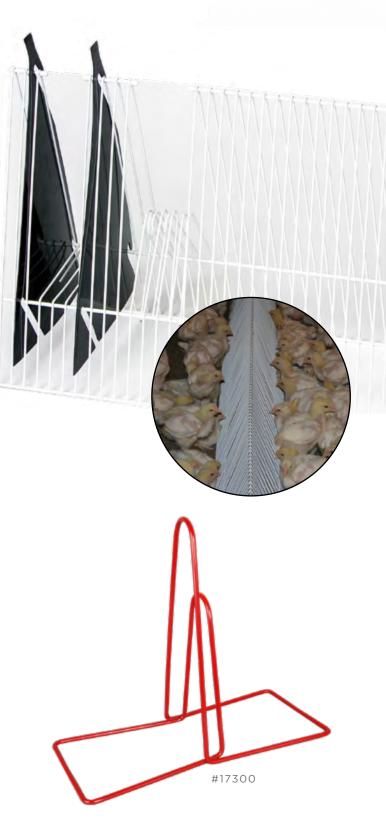

MIGRATION FENCE STAND

- Powder coated steel
- Use with item #17310 Migration Fence
- Compatible with other manufacturers fence
- 17/8 in slot spacing

CABLE CUTTERS

Item #	Description
A 23000	Cable Cutter - Felco C-7 (Swiss Made)
B 23002	Cable Cutter - Economy
C 23003	Cable Cutter - Felco C-9 Extra Heavy Duty (Swiss Made)
D 23005	Cable Cutter - Nicopress Professional
E 23006	Cable Cutter


STA-KON CRIMPING TOOLS

Item #	Description
F 16001	Sta-Kon Crimping Tool
G 16002	Economy Sta-kon Crimping Tool

SWAGGING TOOLS

Item #	Description
H 14000	Nicopress Tool - 3 Cavity Commercial Grade
14001	5 Cavity Light Duty Swaging/Crimping Tool
J 14002	Nicopress Tool - 1/8 in Single Cavity Commercial Grade
K 14003	Nicopress Tool - 3/16 in Single Cavity Commercial Grade
L 14004	14.4 V Battery Operated Swaging Tool - 3 Cavity 3/32 in, 1/8 in, 3/16 in
M 14005	Swaging/Crimping Tool - 3 Cavity 3/32 in, 1/8 in, 3/16 in (US Made)
N 14007	Economy Swaging Tool - 5 Cavity



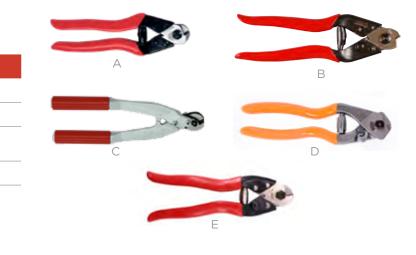











AMT TOUGH TONG

• All metal construction

• Available 30 in and 37 in models

Item #	Description	Standard Package
D 27300	AMT Tough Tong - 37 in	1
27320	AMT Tough Tong - 30 in	1





BOOT COVERS #70001

- 25 pairs in a bag
- Fits up to size 12
- Clear 3 mil polyethylene



N95 FACE MASK WITH RESPIRATOR

#70005-20PK


• 20 masks in a box • 4 Ply



#70011-50PK & #70013-50PK

• 50 coveralls in a box

- Available in sizes XL & 3XL
- 50 gsm PP non-woven

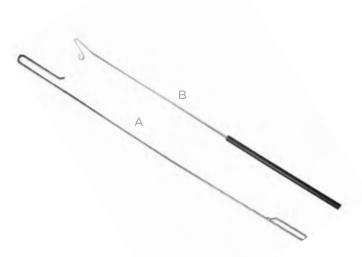







THE PICKER & ACCESSORIES

Item #	Description	Standard Package
C 27200	The Picker	12
27201	Picker Tips	2
27202	Replacement Hand Lever for picker	1
27203	Replacement Spring for Picker	1
27204	Replacement Jaw for Picker	1

FEED CART

- 300 lb capacity
- Durable powder coated metal construction
- Wide 4 in x 16 in balloon tires roll easily on litter
- Tub Dimensions: 37 in x 24 in x 11 in
- 32 in overall width
- Weight: 60lbs
- Easy assembly

CATCHING HOOKS

- For culling sick birds and checking weights and conformity
- Zinc plated


Item #	Description
A 27100	Catching Hook - 53 in long - Made of 1/4 in wire
B 27101	Catching Hook - 45 1/2 in long - Made of 3/16 in wire - comfort grip plastic handle




XF966 THE BEST EGG BELT ON THE MARKET

It is difficult to argue with over 40 years of success. From the first belts we made in 1975, our XF966 Egg Belt has earned the right to be called the best egg belt on the market. Our belt is so unique that the trademark is registered. Many of the first belts installed have outlasted the original equipment. Through the years, we have maintained high quality standards in the XF966 belt and have made improvements as we learned new techniques. During those years, we have seen many egg belt manufacturers come and go. We now have three times more experience with egg belt than

our oldest competitor. XF966 egg collector belt is made of the finest synthetic fiber, specially treated and woven for durability. Our special yarn treatment makes the difference. XF966 can stand up better than other belts to common problems of rodents and everyday snags and cuts. We maintain the largest inventory of egg belt in the world, plus we can ship our stock rolls the same day if ordered by 12:00 PM Eastern time. The durability of our product can turn into dollars for you.



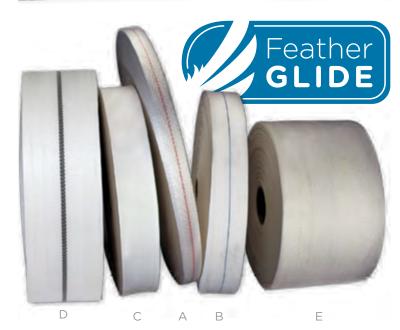



AMT Egg Belt



Our 8-in and 3 3/4-in XF966 Belts are your BEST CHOICE for Breeder Nest Systems


FEATURES


- UV treated to prolong belt life
- Anti-static treated to repel dust particles and prevent static electricity buildup
- Pre-stretched with heat and tension to reduce stretch in the hen house
- Polyethylene fill yarn is more resistant to ammonia and methane gases than the standard polypropylene yarn used by other manufacturers

Check our website for the latest installation instructions

Item #	Description	Standard Roll Lengths
A 62030	3 in	1040 ft
B 62037	3 3/4 in	840 1040 1240 1500 ft
62038	3 3/4 in	840 1040 1240 ft
62040	4 in	840 1040 1240 ft
C 62050	5 in	500 1200 ft
62060	6 in	925 1020 ft
62080	8 in	820 1020 1220 ft
62141	14 in	500 ft

WE ARE THE LARGEST DISTRIBUTOR OF EGG BELTS IN NORTH AMERICA

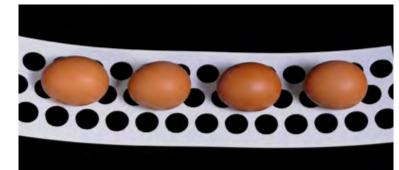

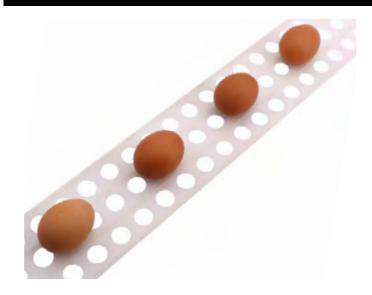



FEATHERGLIDE EGG BELT

- Bigger selection of roll sizes
- Used as original equipment by many manufacturers
- Herringbone weave keeps eggs in place
- Economical alternative to our XF966
- Superior to egg belt offered by other manufacturers
- 8-in and 12-in are made with 25% heavier yarn

	Item #	Description	Standard Roll Lengths
A	63020	2 in	1120 1270 ft
	63035	3 1/2 in	840 1040 1240 ft
В	63037	3 3/4 in	850 1050 1150 1250 1500 ft
С	63040	4 in	850 1050 1250 ft
	63045	4 1/2 in	1050 ft
	63050	5 in	1020 1220 ft
D	63080	8 in	820 1020 1220 ft
	63120	12 in	500 600 ft
Е	63140	14 in	500 600 ft





- Extruded co-polymer polypropylene
- Holes maintain position of eggs on belt and allow dirt to fall through
- Produces cleaner eggs with less cracks
- Available in 820 ft, 1020 ft & 1220 ft rolls
- Flame retardant material available

Direct replacement for systems designed for perforated polypropylene belts. Not recommended for systems designed for woven belts.

Item #	Description	Standard Roll Lengths
61037	3 3/4 in / 1.8 mm	820 1020 1220 ft
61040	4 in / 1.6 mm	820 1020 1220 ft
61050	5 in / 1.5 mm	820 1020 1220 ft
61080	8 in / 1.5 mm	820 1020 1220 ft
61082	8 in / 1.3 mm	820 ft
61100	9.84 in / 1.5 mm	820 1020 1220 ft
61195	19.5 in / 1.7 mm	750 1020 ft
61200	19.68 in / 1.7 mm	1020 ft
61041- Reinforced	4 in	1020 1220 ft



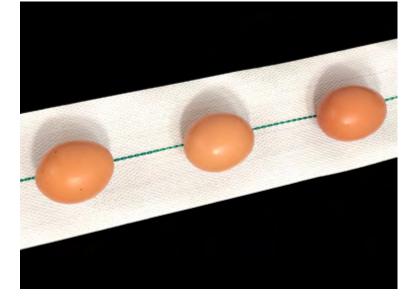

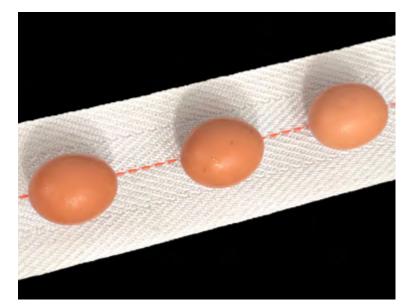

ECONOGLIDE EGG BELT

- The most economical belt on the market
- This belt was developed due to customers' request for a less expensive belt intended for breeder houses that change belts after every flock. Users should not expect the same long-term durability of our FeatherGlide or XF966 belts
- Plain Weave egg belt provides maximum support that is also snag resistant
- The weft is polyethylene and warp is polypropylene • Uses a smaller diameter yarn which decreases stretch

Item #	Description	Standard Roll Lengths
63708	3 3/4 in	850 ft
63710	3 3/4 in	1050 ft
63712	3 3/4 in	1250 ft
60040	4 in	1250 ft

FIRE RETARDANT EGG BELT

- 100% Polypropylene Woven Egg Belt with Fire Retardant Additive
- UV Stabilizer
- Anti-Static additives
- Flame Retardant

Item #	Description	Standard Roll Lengths
63612	3 1/2 in	1250 ft
63810	3 3/4 in	1050 ft
63812	3 3/4 in	1250 ft
61100-610FR	9.84 in	610 ft

MYLAR EGG BELT

- Designed for Diamond, Farmer Automatic Salmet and others
- 10-mil standard thickness
- No stretch
- Completely washable
- Excellent choice where sanitation is a major consideration
- 1040 ft/roll

	Item #	Description
А	64035	3 7/8 in - Creased (for Farmer Automatic & Salm
В	64037	3 7/8 in - Regular (for Diamond)
		A 64035

MYLAR SPLICING SUPPLIES

Item #	Description	Standard Pack
64036	Splicing Tape - 3 in x 55 yd roll	8
64039	Hole Punch	1
	64036	64036 Splicing Tape - 3 in x 55 yd roll

EGG FINGER BELT & ACCESSORIES

We have carefully designed and maintained the quality of our egg finger belts. Other companies have tried to imitate our specially formulated synthetic rubber "fingers", but they do not hold up as well to wear and tear and rodent attack.




All finger belts are made to order. Please allow 4 weeks lead-time.

```
Item #
  87020
D 87100
```







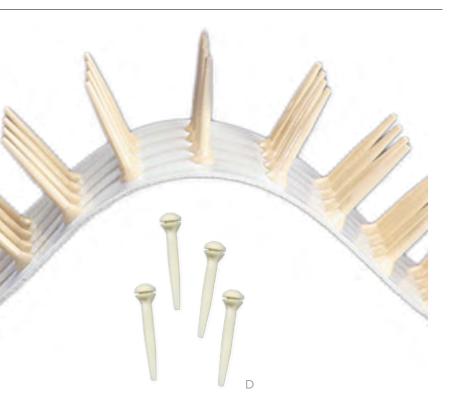

Description	Standard Package
Finger Belt - Punched without Fingers	Up to 100 ft
Egg Fingers - Bulk	100 and 1000



SPLICING SUPPLIES

Item #	Description	Standard Package
61000	Splicing Stapler	1
61010	Staples	5000
66500	Sewing Thread - 1 lb spool (for sewing by hand)	1 Roll
66501	Waxed Sewing Thread - 27 yd roll (sewing by hand)	1 Roll
66502	Sewing Thread - 1/2 lb cone (sewing machine)	1 Roll
66600	Bent Sack Needles (sewing by hand)	12

ALLIGATOR LACING

ltem #	Description	Standard Package
66901	#7 x 18 in	Box of 10
66912	#7 x 12 in	Box of 4
66913	12 in	Box of 4
66916	#7 x 16 in	Box of 4
66918	#7 x 18 in	Box of 4



SPLICING STRAPPING



METAL HOLD DOWN CLIPS



PLASTIC HOLD **DOWN CLIP**

#66401

#66300

HOT- MELT GLUE



ULTRASONIC BELT WELDER

- Durable for harsh and demanding environments
- Easy to use
- Lightweight and ergonomic weighs 6 lbs
- Less than half the weight of other systems
- Portable
- Protected contained in military grade pelican case
- Warranty one year parts & labor
- Crushproof Case internal shock absorption prevents premature component wear and keeps electronics safe from accidental drops
- Corrosive airborne particulates cannot enter system
- Properly controlled welds take less than five seconds
- Recognizes Errors Automatically takes action to prevent damage

Item #	Description
66101	Power Supply for Ultrasonic Belt Welder
66102	Handgun for Ultrasonic Belt Welder
66103	Woven Belt Tip for Ultrasonic Welder
66105	Manure and Perforated Egg Belt Tip for Ultrasonic Welder (1.3 mm - 1.4 mm thickness)
66107	Spot Welding Tip for P100R (1.0mm - 1.4mm)
66110	Travel Case for Ultrasonic Welder Items
66120	P100R Ultrasonic Welding System
66201	500 Watt Egg & Manure Belt Welding System with Hand Held Welding Unit
66203	Woven Belt Welding Tip for 500 Watt Unit (1.0mm - 1.4mm)
66204	Manure Belt Welding Tip for 500 Watt Unit (1.0mm - 1.4mm)
66205	Perforated Belt Welding Tip for 500 Watt Unit (<i>1.3mm - 1.7mm</i>)

MANURE BELT

- Strong and Durable
- More uniform
- Made in Europe
- special order
- 40-mil Co-polymer Polypropylene Flame retardant material available
- Superior impact resistance

ltem #	Description	Standard Roll Length	
61325	32 1/2 in (Meller)	650 ft 900 ft	
61342	34 1/4 in (BEC Cage Master)	900 ft	
61355	35 1/2 in (Big Dutchman)	1040 ft	
61370	37 in <i>(Facco)</i>	900 ft	
61386	38 5/8 in (Farmer Automatic and Salmet)	820 ft 900 ft	
61401	40 1/8 in (Vali)	1040 ft	
61410	41 in	1040 ft	
61423	42 3/16 in (Chore-Time)	1040 ft	
61455	45 5/16 in (<i>Salmet</i>)	1040 ft	
61465	46 1/2 in	1040 ft	
61470	47 in (Alternative Design)	1040 ft	
61480	48 in (Big Dutchman and Favorite)	1040 ft	
61513	51.18 in	1040 ft	
61535	53 1/2 in	1040 ft	
61850	85 in	1040 ft	
60999-1200mm	Manure Drying System Belt	1040 ft	

MANURE CURTAIN

- Replacement for original manure shields
- Made of reinforced polyethylene film
- Hemmed on one side for support rod
- Smooth surface to prevent build-up
- Can be cut to 8' or 10' lengths for a nominal fee
- Made to order

Item #	Description
60015	15 in
60018	18 in
60021	21 in
60024	24 in
60028	28 in

MANURE BELT & CURTAIN




• Other width and lengths available by

• Quantity discount for orders over 8 rolls







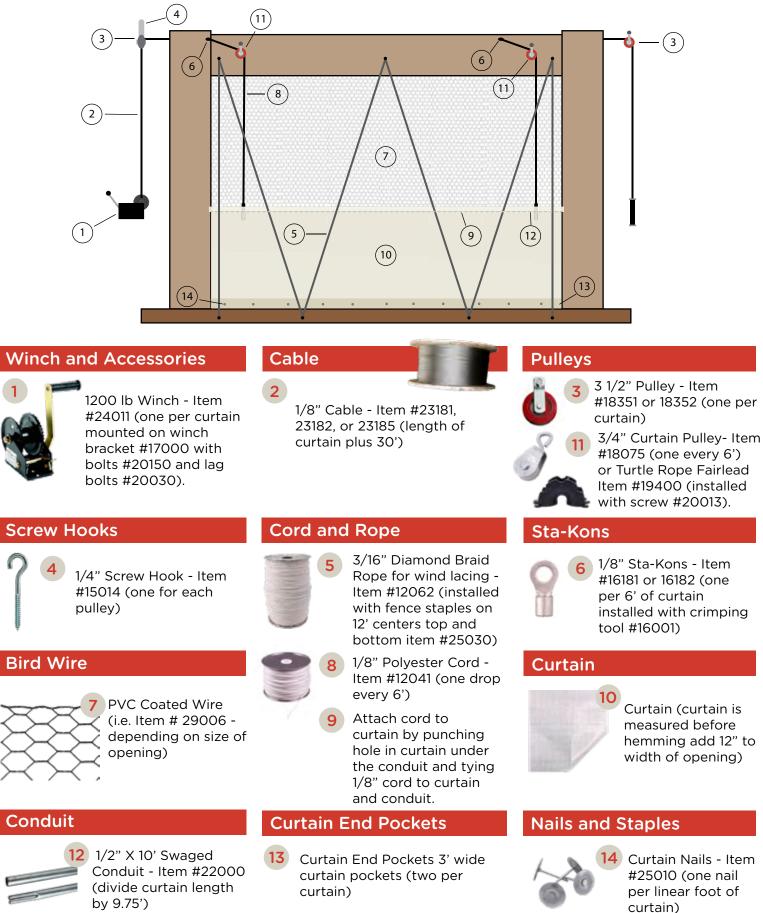

Immediate Turnaround!

AMT POLY-PLUS CLEAR CURTAIN 5.3 OZ

Item #	Description	Roll Lengths
1001581-600-SH	15 in AMT Clear - 5.3 oz SH	600 ft
1001881-600-SH	18 in AMT Clear - 5.3 oz SH	600 ft
1001481-600-DH	4 ft AMT Clear - 5.3 oz DH	600 ft
100481-600-SH	4 ft AMT Clear - 5.3 oz SH	600 ft
100581-600-DH	5 ft AMT Clear - 5.3 oz DH	600 ft
100581-600-SH	5 ft AMT Clear - 5.3 oz SH	600 ft
100681-600-DH	6 ft AMT Clear - 5.3 oz DH	600 ft
100681-600-SH	6 ft AMT Clear - 5.3 oz SH	600 ft
100781-600-DH	7 ft AMT Clear - 5.3 oz DH	600 ft
100781-600-SH	7 ft AMT Clear - 5.3 oz SH	600 ft
101281-300-SH	12 ft AMT Clear - 5.3 oz SH	300 ft

SH=Single Hem DH = Double Hem

AMT POLY-PLUS CURTAIN MATERIAL

- Most Advanced Curtain Construction
- Longer Life
- Maximum Ultraviolet Protection
- Most popular type of curtain used in the USA
- One piece construction up to 12 feet wide
- Available in clear, black, blue, black/white and black/silve
- A 2 1/2 in single hem opening is standard on all curtains. second hems or extra wide hems are optional.
- Poly-Plus curtain is measured before hemming. Deduct 3 in for single hem and 6 in for double hem.
- Example: A 6 ft curtain actually measures 69 in with a single hem or 66 in with a double hem.
- Standard rolls are 600 ft (standard rolls of 12 ft are 300 ft
- Custom roll lengths of 200 ft or more are available at no extra charge (custom length rolls cannot be returned).
- Minimum curtain order is 100 ft unless otherwise indicated

CURTAIN MATERIAL



IN STOCK OPTIONS

AMT POLY-PLUS CLEAR CURTAIN 7.5 OZ

Item #	Description	Roll Lengths
10059-600-SH	5 ft AMT Heavy-Duty Clear - 7.5 oz SH	600 ft
10069-600-SH	6 ft AMT Heavy Duty Clear - 7.5 oz SH	600 ft
10079-600-SH	7 ft AMT Heavy-Duty Clear - 7.5 oz SH	600 ft
10089-600-SH	8 ft AMT Heavy-Duty Clear - 7.5 oz SH	600 ft

AMT POLY-PLUS BLACK/WHITE CURTAIN 6.1 OZ

Item #	Description	Roll Lengths
100184-600-SH	18 in AMT Black/White - 6.1 oz SH	600 ft
10054-600-SH	5 ft AMT Black/White - 6.1 oz SH	600 ft
10064-600-SH	6 ft AMT Black/White - 6.1 oz SH	600 ft
10074-600-SH	7 ft AMT Black/White - 6.1 oz SH	600 ft
10084-600-SH	8 ft AMT Black/White - 6.1 oz SH	600 ft
10094-600-SH	9 ft AMT Black/White - 6.1 oz SH	600 ft

AMT POLY-PLUS CLEAR CURTAIN 4 OZ

- 4 oz/square yard
- 10 x 10 weave
- Maximum light penetration

	Item #	Description
r	10008	8 in Clear
	10011	12 in Clear
	100151	15 in Clear
	100181	18 in Clear
	10021	2 ft Clear
:).	10031	3 ft Clear
	10041	4 ft Clear
d.	10051	5 ft Clear
u	10061	6 ft Clear

Greenhouse effect makes
 buildings warmer

Item #	Description
10071	7 ft Clear
10081	8 ft Clear
10091	9 ft Clear
10101	10 ft Clear
10121	12 ft Clear
10131	13 ft Clear
10141	14 ft Clear*
10151	15 ft Clear*

*2 Piece Construction

CURTAIN MATERIAL



AMT POLY-PLUS CLEAR CURTAIN 5.3 OZ

- Economical yet very reliable
- 5.3 oz/square yard
- 12 x 12 Weave
- 12 mil thickness

ltem #	Description
100781	7 ft Clear
100881	8 ft Clear
100981	9 ft Clear
101081	10 ft Clear
101281	12 ft Clear
101381	13 ft Clear
101481	14 ft Clear*
101581	15 ft Clear*

*2 Piece Construction

AMT POLY-PLUS CLEAR CURTAIN 7.5 OZ

- 7.5 oz/square yard
- 12 x 12 weave
- A heavier version of our most popular curtain

Description Item # 10029 2 ft Heavy-Duty Clear 10039 3 ft Heavy-Duty Clear 10049 4 ft Heavy-Duty Clear 10059 5 ft Heavy-Duty Clear 10069 6 ft Heavy-Duty Clear 10079 7 ft Heavy-Duty Clear 10089 8 ft Heavy-Duty Clear 10099 9 ft Heavy-Duty Clear 10109 10 ft Heavy-Duty Clear 10119 12 ft Heavy Duty Clear

AMT POLY-PLUS CLEAR CURTAIN 10 OZ

- 10 oz/square yard
- 16 x 16 weave
- Mullen Burst: 510 PSI
- 22 mil thickness

Item #	Description
10040	4 ft Clear - 10 oz
10050	5 ft Clear 10 oz
10060	6 ft Clear - 10 oz
10070	7 ft Clear - 10 oz
10080	8 ft Clear - 10 oz
10090	9 ft Clear - 10 oz
10100	10 ft Clear - 10 oz
10120	12 ft Clear - 10 oz




AMT POLY-PLUS BLACK/ WHITE CURTAIN 6.1 OZ

- 6.1 oz/square yard
- 10 x 10 weave
 - 7.5 mil thickness

Also available in Black, Black/Silver, Black/White Double Layer and Blue 5.3 oz curtain.

Due to the manufacturing process, we cannot warrant against pinhole spots in single layer black fabrics. Black, Black/Silver and Black/ White can be fabricated as **double layer curtains for guarantee total blackout**.

Item #	Description
10014	12 in Black/White
100154	15 in Black/White
100184	18 in Black/White
10024	2 ft Black/White
10034	3 ft Black/White
10044	4 ft Black/White
10054	5 ft Black/White
10064	6 ft Black/White
10074	7 ft Black/White
10084	8 ft Black/White
10094	9 ft Black/White
10104	10 ft Black/White
10124	12 ft Black/White

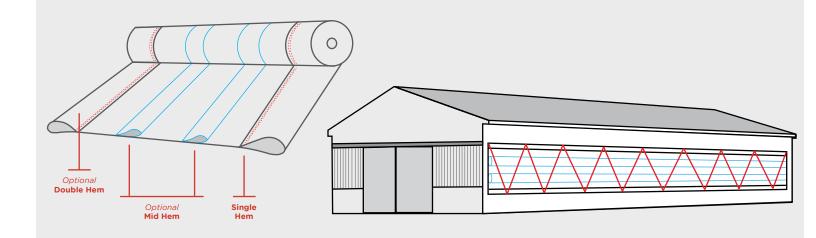

Item #	Description
10313	3 ft AMT Clear Vinyl - 16 oz
10314	4 ft AMT Clear Vinyl - 16 oz
10315	5 ft AMT Clear Vinyl - 16 oz
10316	6 ft AMT Clear Vinyl - 16 oz
10317	7 ft AMT Clear Vinyl - 16 oz
10318	8 ft AMT Clear Vinyl - 16 oz
10319	9 ft AMT Clear Vinyl - 16 oz
10310	10 ft AMT Clear Vinyl - 16 oz
10312	12 ft AMT Clear Vinyl - 16 oz

AMT ZIPPER CURTAIN

- For Partial House Brooding, Tunnel Inlet Covers, End Door Covers and Fan Covers
- Made with our 4.5 oz clear or 6.1 oz black curtain
- 2 zippers for easy installation and removal
- Can be fabricated to any size
- Extra zippers can be added
- Standard curtains are 12 feet high

Item #	Description	Item #	Description
10127-40	40 ft Clear Zipper	10131-40	40 ft Black Zipper
10127-42	42 ft Clear Zipper	10131-42	42 ft Black Zipper
10127-44	44 ft Clear Zipper	10131-44	44 ft Black Zipper
10127-46	46 ft Clear Zipper	10131-46	46 ft Black Zipper
10127-48	48 ft Clear Zipper	10131-48	48 ft Black Zipper
10127-50	50 ft Clear Zipper	10131-50	50 ft Black Zipper
10127-52	52 ft Clear Zipper	10131-52	52 ft Black Zipper
10127-57	57 ft Clear Zipper		
10127-62	62 ft Clear Zipper	ZIPPER CU	RTAINS CAN BE MADE
10127-68	68 ft Clear Zipper	CUSTOM LENGTHS. PLEASE CONTAC US FOR OPTIONS AND PRICING.	

Check out our website for additional options.

CURTAIN MATERIAL



AMT 16 OZ CLEAR VINYL

- One of the heaviest curtains on the market
- Greater flexibility and abrasion resistance than heavy poly curtains
- Super clear coating allows the most light transmission of any heavy weight curtain
- Width over 6 ft require 2 pieces construction

CURTAIN MATERIAL

AMT 7-LAYER INSULATED CURTAIN

- Our Standard 7-Layer Insulated Curtain includes one outer layer of AMT White Poly-Plus, four inner layers of non-woven insulating material, one inner layer of AMT Clear Poly-Plus vapor barrier and one outer layer of AMT Clear Poly-Plus Curtain
- Our new Black/White 7-layer insulated Curtain includes one outer layer of AMT White Poly-Plus, four inner layers of non-woven insulating material, one inner layer of AMT Clear Poly-Plus vapor barrier and one outer layer of AMT Black Poly-Plus Curtain
- Estimated R value of 3
- Insulated curtains are full width No deduction for hems
- Reduces light transmission by 93%
- Approximately 25 oz/square yard
- Standard rolls are 200 ft
- Custom roll lengths are available

Item #	Description
10037	3 ft AMT 7-Layer Insulated
10047	4 ft AMT 7-Layer Insulated
10057	5 ft AMT 7-Layer Insulated
10067	6 ft AMT 7-Layer Insulated
10077	7 ft AMT 7-Layer Insulated
10087	8 ft AMT 7-Layer Insulated
100374	3 ft AMT B/W 7-Layer Insulated
100474	4 ft AMT B/W 7-Layer Insulated
100574	5 ft AMT B/W 7-Layer Insulated
100674	6 ft AMT B/W 7-Layer Insulated
100774	7 ft AMT B/W 7-Layer Insulated
100874	8 ft AMT B/W 7-Layer Insulated

WE CAN FABRICATE CURTAINS FOR THE FOLLOWING APPLICATIONS:

Double Layer CurtainsInsulated Inlet CurtainsTunnel Inlet CurtainsZipper Curtain DividersEnd Door CurtainsFan Shutter CoversBaffle CurtainsSimple Brood CurtainsShade Cloth



CURTAIN NAILS

- Plastic cap will not rust or cut the curtain
- New and improved with stronger nail and extra UV protection
- 11/4 in long
- 2000/box

ltem #	Description
10131-40	40 ft Black Zipper
10131-42	42 ft Black Zipper
10131-44	44 ft Black Zipper
10131-46	46 ft Black Zipper
10131-48	48 ft Black Zipper
10131-50	50 ft Black Zipper
10131-52	52 ft Black Zipper



BUBBLE INSULATED CURTAIN

- Made with outer layer of 6.1 oz black/white, middle layer of bubble insulation and inner layer of 6.1 oz black curtain
- Estimated R Value of 4 for 3-Layer



LEXAN CURTAIN CLIPS

For connecting cord to curtain and conduit
500/box

#22030

#25020

I J

• For temporary repairs to poly type curtains



- For curtain rods and water support
- Swaged end for easy assembly

Item #	Description	Ro
22000	.706 in (1/2 in) x 10 ft 3 in Swaged Conduit	
C 22001	1.05 in x 10 ft 3 in Swaged Conduit (Ziggity)	
22002	.922 in x 10 ft Swaged Conduit	
□ 22003	1.163 in x 10 ft 3 in Swaged Conduit (Val)	



SHADE CLOTH

- Black, woven polypropylene material ideal for controlling sunlight to provide optimum growing conditions
- Made to order
- Standard spacing on grommets is 2 ft

Shade Percentages Available:


20%, 30%, 40%, 47%, 51%, 63%, 73%, 80%, & 95%

CURTAIN ACCESSORIES





#25030



• Sold by the box only

CURTAIN NAILS

METAL CAP

FENCE STAPLES

- Ribbed shank
- For attaching zig zag cord over curtains
- For hanging curtain pulleys
- 1 1/2 in long
- Sold by the pound

#11001



VAPOR BARRIER PATCH TAPE

- 4 in x 165 ft
- For repairs to vapor barrier
- Also good for curtain repair


Item #	Description	Roll Lengths
⊑ 10002	Curtain Repair Tape - Clear 3 in	60 ft
F 10003	Curtain Repair Tape - Black/White 3 in	60 ft
G 10004	Curtain Repair Tape - Black 4 in	60 ft
⊣ 10005	Curtain Repair Tape - Blue 4 in	60 ft
10006	Curtain Repair Tape - White 4 in	60 ft
J 10001	Vinyl Curtain Repair Glue	-



www.amt-usa.com

63

57 **BIRD WIRE**

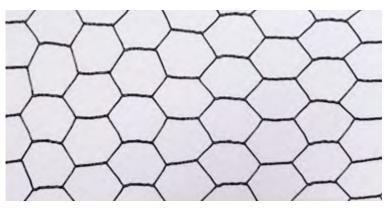

PVC COATED HEX WIRE

• 20 gauge wire, Galvanized before coating, 1 in wire mesh


Polypropylene

Item #	Description	Roll Lengths
29650	5 ft	330 ft
29660	6 ft	330 ft
29670	7 ft	330 ft

& rustproof

rolls of 330'

Item #	Description	Roll Lengths
29001	1 ft	150 ft
29018	18 in	150 ft
29002	2 ft	150 ft
29003	3 ft	150 ft
29004	4 ft	150 ft
29005	5 ft	150 ft
29006	6 ft	150 ft
29007	7 ft	150 ft
29055	5 ft Stainless Steel	150 ft
29056	6 ft Stainless Steel	150 ft

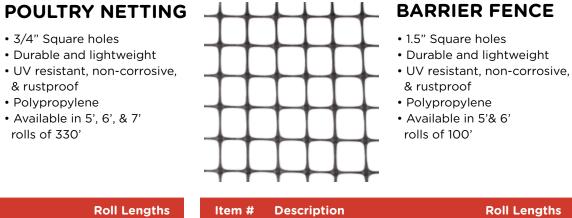

s

В **STRAPPING** • Curtain strapping Description **Roll Lengths** Item # Black Polypropylene Tape 1.75 in x 300 ft A 13001 24 Roll ₿ 62030 Black Polypropylene Webbing 3 in x 1040 ft 1 Roll

CO 10 11 10 #29206

6 FT WELDED WIRE

• 1 in x 2 in x 100 ft HDG • 14 Gauge

INTERMATIC TIMERS

Item #	Description			
132T2926A	2T2926A - Case-Outdoor, Type 3R Plastic, Gray with See-Through Window			
13CT2000	CT2000 Timer (30 sec, 60 sec, 180 sec, 5 min, 10 min, cycle timer)			
13ET1705C	ET1705C - 7-Day 1-Circuit Electronic Control, 120-277 VAC, SPST, Indoor Metal Enclosure			
13ET2105CP	ET2105CP 24-Hour/365 Day 1-Circuit Electronic Control, 120-277 VAC, SPST, Indoor/ Outdoor Plastic Enclosure		#13402 #13CT2000 #13ET2105CP	
13ET2125CP	ET2125CP 24-Hour/365 Day 2-Circuit Electronic Control, 120-277 VAC, 2-SPST/DPST, Indoor/Outdoor Plastic Enclosure		BY JOHNSON CONTROLS	
13T101	T101 - 24-Hour Mechanical Time Switch, 120 VAC, 60Hz, SPST, Indoor Metal Enclosure, 1 Hour Interval	Item # 13401	Description A421ABC-02C Single Stage Electronic Temperature Control w/ A99BB-200C	
13T102	T102 - 24-Hour Mechanical Time Switch, 208- 277 VAC, 60Hz, SPST, Indoor Metal Enclosure, 1 Hour Interval	13402	A421ABC-03C Single Stage Electronic Temperature Control w/ A99BB-300C	
13T103	T103 - 24-Hour Mechanical Time Switch, 120 VAC, 60Hz, DPST, Indoor Metal Enclosure, 1 Hour Interval	13406	A421AEC-01C - Electronic Temperature Control w/ A99BB-25C & Watertight Enclosure	
13T103P	T103P - 24-Hour Mechanical Time Switch, 120 VAC, 60Hz, DPST, Indoor/Outdoor Plastic	13410	A421GBF-02C - Low Voltage Single Stage Electronic Temperature Control w/ A99BB-200C	
	Enclosure, 1 Hour Interval	13411	A421GEF-01C - Low Voltage Single Stage Electronic Temperature Control w/ A99BB-25C	
13T104P	T104P - 24-Hour Mechanical Time Switch, 208- 277 VAC, 60Hz, DPST, Indoor/Outdoor Plastic Enclosure, 1 Hour Interval	13415	A99BB-200C - PTC Temperature Sensor	
13T105	T105 - 24-Hour Mechanical Time Switch, 120 VAC, 60Hz, 1 NO/1 NC, SPDT, Indoor Metal Enclosure, 1 Hour Interval	13440	A19BAC-15C - Single Stage Thermostat	
		13450	T19SB-1C Stainless Thermostat 1 Stage	
13T173	T173 - 24-Hour Mechanical Time Switch with Skip-a-Day, 120 VAC, 60Hz, DPST, Indoor Metal Enclosure, 1 Hour Interval	13452	T19PC-2C Watertight Thermostat 1 Stage	

PRO-TECH CONTROLLERS AND SENSORS





#13105

Voltage Minder

Curtain Minder

CONTROLLERS & SENSORS





#13100



#13108

Temp Minder



Broiler Feeders:

- 1 AMT 5000 lb winch on a feed line of 500 ft or less.
- 2 AMT 5000 lb winches on feed line longer than 500 ft.
- Allow 4 full wraps of the strap on winch drum prior to lifting weight of feeders.
- Never pull directly against bolt holding strap to winch drum.
- When using a double-back use AMT Prime Cable - 3/16 in 7 x 19.
- The AMT 5000 lb winch is designed to pull 2 lines in opposite directions simultaneously. Never pull in just one direction with winch.

Turkev Feeders:

- Never use straps on turkey feeders.
- 1 AMT 5000 lb winch on a feed line of 500 ft or less.
- 2 AMT 5000 lb winches on feed line longer than 500 ft.
- Always use a double-back winching system on turkey feeders.
- When using a double-back use AMT Prime Cable - 3/16 in 7 x 19.
- Use AMT Prime Cable 1/4 in 7 x 19 when not using double-back.
- The AMT 5000 lb winch is designed to pull 2 lines in opposite directions simultaneously. Never pull in just one direction with winch.

Breeder Nest

- Never use straps on breeder nest systems
- 2 AMT 5000 lb winches on each line of nest 400 ft in length.

- 3 AMT 5000 lb winches on each line of nest 500 ft in length.
- 4 AMT 5000 lb winches on each line of nest 600 ft in length.
- Always use double-back winching system on nests.
- When using a double-back use AMT Prime Cable - 3/16 in 7 x 19.
- Use AMT Prime Cable 1/4 in 7 x 19 when not using double-back.
- The AMT 5000 lb winch is designed to pull 2 lines in opposite directions simultaneously. Never pull in just one direction with winch.

Pullet Chain Feeders

- Never use straps on Chain Feeders. 1 AMT 5000 lb winch of chain feed lines less than 500 ft.
- 2 AMT 5000 lb winches on chain feed lines 500 ft or longer.
- Always use double-back winching system on chain feed lines.
- When using a double-back use AMT Prime Cable - 3/16 in 7 x 19.
- Use AMT Prime Cable 1/4 in 7 x 19 when not using double-back.
- The AMT 5000 lb winch is designed to pull 2 lines in opposite directions simultaneously. Never pull in just one • direction with winch.

General Guidelines

- If using straps, make sure they are aligned with the winch drum. They will be damaged if rubbing on either side of the drum.
- In most cases, cable is the limiting factor in these guidelines. While

the winch has a capacity of 5000 lbs, 3/16 in 7 x 7 cable has a break strength of 3700 lbs. Cable manufacturers recommend suspending no more than 50% of the rated break strength as a working load. This is 1850 lbs for 3/16 cable.

- The maximum pulling capacity of all AMT Winches is based on the first layer of cable on drum.
- The maximum pulling capacity of Dutton Lainson Winches is based on the third layer of cable on drum.
- The maximum pulling capacity is reduced by 10% each layer of cable put on the drum.
- The maximum pulling capacity is reduced by 50% on a straight pull with the drum at full capacity of cable.
- We recommend at least 3 full turns of cable on drum before lifting load.
- We recommend using a double back when load exceeds 50% of maximum pulling capacity.
- We don't recommend using straps when weight exceeds 50% of maximum pulling capacity of the winch.
- The safe working load of a winch is 50% of maximum pulling capacity of a winch with the drum at full capacity of cable.
- We do not recommend operating a winch at more that 50% of the maximum pulling capacity.

GENERAL WARRANTY POLICY

AMT warrants its products and parts against defects in materials and workmanship for 1 year from the original ship date. During this period, AMT will, at its option, (a) repair or replace such product, or (b) refund to the original purchaser the original purchase price, in lieu of such repair or replacement. Labor costs associated with the replacement or repair of the product are not covered by AMT. This Warranty applies only to the Original Purchaser of the product. Additional extended warranties for the equipment and/or systems listed below are provided to the original purchaser as follows (for all other AMT products purchased, the 1 year warranty period shall apply):

Egg Belt:

woven belts.

Curtain Material:

3 years prorated (100% first 12 months, 2.77% for each month remaining after 12 months). For example: A 20-monthold curtain would be credited for 44.32% of the original price (16 months left on warranty x 2.77%/month)

WindLift 5000 lb. Overhead Winch #24049 & 24050:

5 years prorated (100% first 12 months, 1.67% for each month remaining after 12 months).

Dutton-Lainson Winches:

5 years prorated **Electric Motors:**

2 years

CONDITIONS AND LIMITATIONS

- Warranty will be void.
- 2. Warranty is void if all components of the system are not original equipment supplied by AMT.
- 3. This product must be purchased from and installed by an AMT APPROVED authorized distributor or certified representative thereof or the Warranty will be void.
- not be considered defects under the Warranty.
- not covered by this Warranty.
- costs and operational inefficiencies, inconvenience or animal/poultry performance.

Failure to install the equipment according to product manuals or perform routine maintenance according to product manuals voids all warranties.

THIS WARRANTY CONSTITUTES THE MANUFACTURER'S ENTIRE AND SOLE WARRANTY AND THIS MANUFACTURER. DISCLAIMS ANY AND ALL OTHER WARRANTIES. INCLUDING, BUT NOT LIMITED TO, EXPRESS AND IMPLIED WARRANTIES. AS TO MERCHANTABILITY, FITNESS FOR PARTICULAR PURPOSES SOLD AND DESCRIPTION OR QUALITY OF THE PRODUCT FURNISHED HEREUNDER.

AMT Distributors are not authorized to modify or extend the terms and conditions of this Warranty in any manner or to offer or grant any other warranties for AMT products in addition to those terms expressly stated above.

CONTACT US FOR CUSTOM WHOLE-HOUSE WINCHING QUOTES FOR NEW CONSTRUCTION OR RETROFITS

1-800-344-2358 OR SALES@AMT-USA.COM





1 year from date of purchase against defects in material and workmanship. The belt is not warrantied against premature wear caused by over tightening, rodent damage, worn nests trough or excessive egg load. The belt should be tightened by hand only. The use of drive system to tighten belt will void warranty. Wash belts with cold water only. The use of disinfectants will void warranty.

Perforated Eqg Belt:

Only to be used in systems designed for perforated polypropylene belts. Not recommended for systems designed for

Spare Parts:

30 days for all spare/replacement parts

Prime Cable:

5 years prorated against rust for Prime Cable Only. (100% first 12 months. 1.67% for each month remaining after 12 months). All other galvanized and stainless steel cable carries our standard 12-month warranty. Cable is not guaranteed against breakage.

Cable Free Systems:

5 years prorated on rods and cord provided all parts (winches, pulleys, fittings, rod, straps, cord and adjusters) are purchased from AMT and installed per their instructions.

1. The product must be installed by and operated in accordance with the instructions published by the Manufacturer or

4. Malfunctions or failure resulting from misuse, abuse, negligence, alteration, accident, or lack of proper maintenance shall

5. This Warranty applies only to systems for the care of poultry and livestock. Other applications in industry or commerce are

6. AMT shall not be liable for any consequential or special damages related to these products including, but not limited to, loss of time or use, costs of transportation, lost sales, lost orders, lost income, increased overhead, labor and incidental